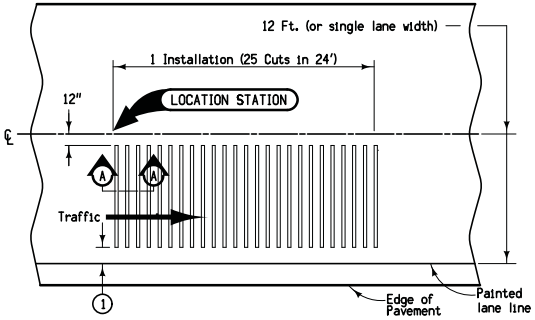

PLAN

(1) 18" strip along painted lane line left as normal pavement surface to accommodate bicycles.

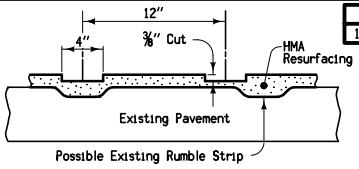

SECTION A-A

Construction of rumble strip panels will be required on this project at locations designated on the plans.

Construction of rumble strip panels will be required within 24 hours after completion of final surface course.

The rumble strip panel shall be constructed by sawing strips of the dimension indicated above.

For each "Rumble Strip Panel" the contractor will be paid the contract unit price. This will be considered full compensation for construction of the panel as detailed hereon.

2613
10-18-05

RUMBLE STRIP PANEL IN RESURFACING