8302
10-19-04

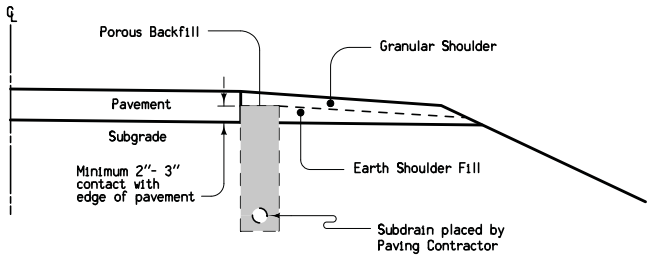

Notes:

Earth shoulder fill material generated from trimming of the subgrade before paving shall be stockpiled outside of the subdrain area. Trim off earth to expose subdrain rock. Place fillet of porous backfill (separate compaction not required) prior to placing earth shoulder fill. Any deficiency to be made up by borrow furnished by the contractor. Earth shoulder fill is followed by the placement of "Granular Shoulder Material".

Fillet Rate: 1-Ton/Sta./Shoulder Payment of "Porous Backfill" will be by tons.

SUBDRAIN MAINTENANCE DURING SHOULDERING ACTIVITIES