


2013
09-29-92

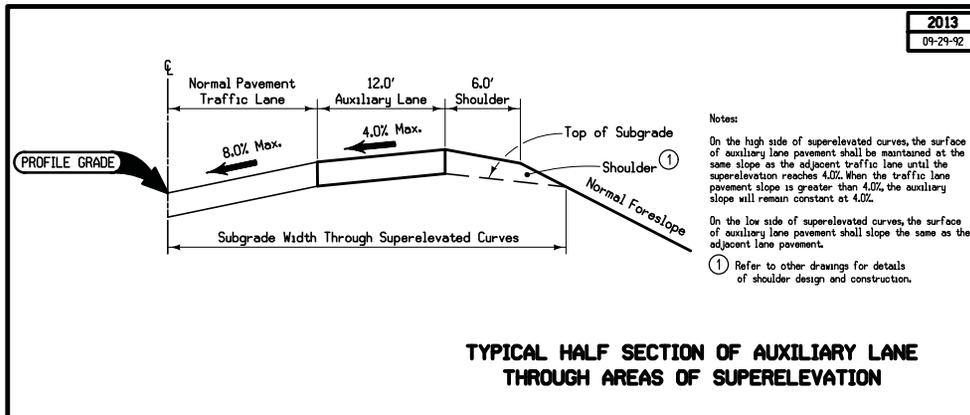

Notes:
On the high side of superelevated curves, the surface of auxiliary lane pavement shall be maintained at the same slope as the adjacent traffic lane until the superelevation reaches 4.0%. When the traffic lane pavement slope is greater than 4.0%, the auxiliary slope will remain constant at 4.0%.
On the low side of superelevated curves, the surface of auxiliary lane pavement shall slope the same as the adjacent lane pavement.
① Refer to other drawings for details of shoulder design and construction.

TYPICAL HALF SECTION OF AUXILIARY LANE THROUGH AREAS OF SUPERELEVATION