QUANTITIES NEEDED
STRUCTURAL CONCRETE, CULVERT
REINFORCING STEEL
CLASS 20 EXCAVATION
REMOVALS AS PER PLAN
MOBILIZATION

SPECIFICATIONS:

DESIGN: AASHTO LRFD 5th Ed, SERIES OF 2010.

CONSTRUCTION: IOWA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY AND BRIDGE CONSTRUCTION, SERIES 2012, PLUS APPLICABLE GENERAL SUPPLEMENTAL SPECIFICATIONS, DEVELOPMENTAL SPECIFICATIONS, SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS SHALL APPLY TO CONSTRUCTION WORK ON THIS PROJECT.

DESIGN STRESSES:

DESIGN STRESSES FOR THE FOLLOWING MATERIALS ARE IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, 5th Ed, SERIES OF 2010.
REINFORCING STEEL IN ACCORDANCE WITH LRFD AASHTO SECTION 5, GRADE 60.
CONCRETE IN ACCORDANCE WITH LRFD AASHTO SECTION 5, f'c = 4.0 KSI.

STANDARDS:
FOR DETAILS AND NOTES NOT SHOWN REFER TO THE FOLLOWING IOWA D.O.T. - HIGHWAY STANDARDS:

STANDARD	ISSUED	REVISED
**		

** NOTE: "TOP SLAB CONSTRUCTION JOINT DETAIL" DOES NOT APPLY.

SUMMARY OF REINFORCING STEEL

LOCATION	QUANTITY	TOTAL
HEADWALLS ? SKEW	2 AT ?	?
? BARREL EXTENSION		?
? BARREL END SECTION		?
5r1 x 3'-6 DOWEL BARS	? AT ?	?
	TOTAL (LBS.)	?

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	SLAB	TOTAL
HEADWALLS ? SKEW	2 AT	2 AT	* 2 AT	?
? BARREL EXTENSION				
? BARREL END SECTION				
TOTAL (C.Y.)				

* INCLUDES PARAPET AND TOP OF WINGWALL.

DESIGN HISTORY AT THIS SITE
(INCLUDES THIS DESIGN)

DES. NO.	TYPE OF WORK
X	X
X	X
X	X
X	X
X	X

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

REVISION 11-15 - MODIFIED "DESIGN HISTORY" TABLE TO STATE "(INCLUDES THIS DESIGN)".
ENGLISHSINGLECULVERTS.DGN - 1043 - THIS SHEET REDRAWN 9-8-88

GENERAL NOTES:

IT IS THE INTENT OF THIS DESIGN TO EXTEND THE EXISTING _____ REINFORCED CONCRETE BOX CULVERT.

COPIES OF ORIGINAL DESIGN PLANS WILL BE MADE AVAILABLE TO THE CONTRACTOR. CONTACT THE OFFICE OF CONTRACTS - HIGHWAY DIVISION - IOWA D.O.T. - AMES. DIMENSIONS SHOWN ON THESE PLANS ARE BASED ON DESIGN PLANS (ORIGINAL DESIGN NO. _____).

FAINT LINES ON PLANS INDICATE EXISTING STRUCTURE.

UTILITY COMPANIES AND MUNICIPALITIES WHOSE FACILITIES ARE SHOWN ON THE PLANS OR KNOWN TO BE WITHIN THE CONSTRUCTION LIMITS SHALL BE NOTIFIED BY THE CONTRACTOR OF THE CONSTRUCTION STARTING DATE.

THE R.C.B. CULVERT EXTENSION SECTIONS ARE DESIGNED FOR HL-93 LIVE LOAD AND EARTH FILLS OF _____ FEET. THIS DESIGN IS BASED ON LOAD AND RESISTANCE FACTOR DESIGN, ACCORDING TO THE 2010 AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.

VERTICAL EARTH PRESSURE, EV=0.120 kcf.

HORIZONTAL EARTH PRESSURE, EHmax = 0.060 kcf MAX, EHmin = 0.030 kcf.

THE CONTRACTOR MAY SUBMIT ALTERNATE FROST TROUGH DIMENSIONS FOR APPROVAL. ANY ADDITIONAL COSTS DUE TO CHANGE IN THE FROST TROUGH DIMENSIONS IS TO BE PAID FOR BY THE CONTRACTOR.

FLOOR OF BARREL IS TO BE FINISHED SMOOTH. SIDES OF FOOTING ARE TO BE FORMED TO INSURE CORRECT LINE AND GRADE.

THE PERMISSIBLE CONSTRUCTION JOINT AT THE TOP OF THE WALLS MAY BE LOWERED AT THE CONTRACTOR'S OPTION WITH ENGINEER'S APPROVAL.

THE VERTICAL BARS IN THE WALLS MAY BE SPLICED ABOVE THE FOOTING AT THE CONTRACTOR'S OPTION AS FOLLOWS:

BAR SIZE NUMBER	4	5	6	7	8
MINIMUM SPLICE LENGTH	21"	26"	31"	41"	54"

THIS SPLICE, IF USED WILL BE AT THE CONTRACTOR'S EXPENSE.

METAL BAR CHAIRS SPACED AT NOT OVER 3'-0 C.-C. IN EITHER DIRECTION ARE TO BE USED TO SUPPORT ALL SLAB AND FLOOR STEEL AS OUTLINED IN THE STANDARD SPECIFICATIONS.

THE REINFORCEMENT SUPPLIED FOR THIS STRUCTURE SHALL BE GRADE 60.

REINFORCING BAR CLEARANCES WILL BE AS FOLLOWS:

EDGE CLEARANCES: 2" EXCEPT
TOP OF FLOOR $2\frac{1}{4}$" TO NEAR TRANSV. REINF. BAR
BOTTOM OF FLOOR $3\frac{1}{2}$" TO NEAR TRANSV. REINF. BAR

END CLEARANCES:
VERTICAL TOP 2"
VERTICAL BOTTOM 3" OR $3\frac{1}{2}$" IF OVERALL HEIGHT OF THE CULVERT IS NOT TO A FULL INCH
TRANSVERSE 2"

ALL REINFORCING BARS AND BARS NOTED AS DOWELS SUPPLIED FOR THIS STRUCTURE SHALL BE DEFORMED REINFORCEMENT UNLESS OTHERWISE NOTED OR SHOWN.

CLASS 20 EXCAVATION MATERIAL UNSUITABLE FOR BACKFILLING SHALL BE DISPOSED OF IN A MANNER THAT WILL LEAVE THE SITE IN A NEAT CONDITION.

THE PRICE BID FOR "REMOVALS AS PER PLAN" SHALL INCLUDE THE COST FOR REMOVALS OF PORTIONS OF THE EXISTING CULVERT, AND THE SETTING OF THE DOWEL REINFORCING BARS INTO EXISTING CONCRETE.

ALL DIMENSIONS AND DETAILS SHOWN ON THESE PLANS PERTINENT TO NEW CONSTRUCTION IN RELATION TO EXISTING PORTIONS OF THE STRUCTURE SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR BEFORE STARTING CONSTRUCTION.

REMOVAL OF THE EXISTING CULVERT SHALL BE ON A VERTICAL PLANE PARALLEL WITH AND AT THE FRONT FACE OF THE EXISTING PARAPET, AND TO THE WIDTH OF THE FLOOR OF THE PROPOSED EXTENSION. THE WALLS SHALL BE CUT NORMAL TO THE BARREL WALLS AND AS SHOWN ON THE "PART REMOVAL PLAN". THE REMOVAL LINE SHALL BE INITIATED WITH A $2\frac{1}{2}$"± DEEP SAW CUT ON THE TOP AND BOTH SIDES OF EACH WALL, AND ACROSS THE TOP OF THE FLOOR. THIS SAW CUT SHOULD CUT THRU ANY EXISTING LONGITUDINAL REINFORCING THEREBY FACILITATING A NEAT NON-SPALLED BREAK LINE. IF EXISTING TOP OF PARAPETS WILL BE WITHIN 0'-6 OF PROPOSED SUBGRADE ELEVATION, THE PARAPETS SHALL BE REMOVED DOWN TO AN ELEVATION 1"± ABOVE THE TOP OF THE EXISTING SLAB. ANY EXISTING PARAPET VERTICAL BARS EXPOSED DURING PARAPET REMOVAL SHALL BE CUT OFF FLUSH WITH THE PARAPET REMOVAL LINE AND PAINTED WITH TWO COATS OF ZINC RICH PAINT.

ALL REMOVALS SHALL BE CAREFULLY ACCOMPLISHED AND ANY CONCRETE DAMAGED BY THE CONTRACTOR THAT IS NOT TO BE REMOVED SHALL BE REPAIRED BY THE CONTRACTOR AT NO EXTRA COST TO THE STATE. REMOVALS SHALL BE IN ACCORDANCE WITH SECTION 2401 OF THE STANDARD SPECIFICATIONS.

THE PROPOSED CULVERT EXTENSION SHALL ABUT AGAINST THE FRONT FACE OF THE EXISTING PARAPET. 5z1 x 2'-6 DOWEL REINFORCING BARS WITH A 10" MINIMUM EMBEDMENT INTO EXISTING CONCRETE SHALL BE SET AROUND THE ENTIRE PERIPHERY OF THE EXISTING CULVERT. 5z1 DOWEL REINFORCING BARS SHALL BE CENTERED IN THE EXISTING SLAB, WALLS AND FLOOR. 5z1 DOWEL REINFORCING BARS SHALL BE AT 1'-0 MAXIMUM SPACING C.-C. OF DOWELS. 5z1 DOWEL REINFORCING BARS SHALL BE SET WITH POLYMER GROUT IN ACCORDANCE WITH ARTICLE 2301.03, E, OF THE STANDARD SPECIFICATIONS, AND CURRENT SUPPLEMENTAL SPECIFICATIONS OF THE IOWA D.O.T. HIGHWAY DIVISION.

BENCH MARK :

THE ROADWAY WILL BE OPEN TO TRAFFIC DURING CONSTRUCTION.

SINCE THE HIGHWAY WILL NOT BE CLOSED TO TRAFFIC DURING THIS CONSTRUCTION, THE CONTRACTOR MAY FEEL TEMPORARY SHORING (SHEET PILE OR OTHER) IS NECESSARY TO ENSURE THAT THE SHOULDER WILL NOT SLOUGH IN WHILE CULVERT IS BEING EXTENDED. HOWEVER, IF FOR ANY REASON SUCH SHORING IS DEEMED NECESSARY, THE CONTRACTOR WILL SUBMIT THE SHORING PLAN TO THE ENGINEER FOR APPROVAL. COST OF SHORING IF REQUIRED WILL BE CONSIDERED INCIDENTAL TO CONSTRUCTION AND NO DIRECT PAYMENT WILL BE MADE. ALL MATERIAL USED FOR SHORING SHALL REMAIN THE PROPERTY OF THE CONTRACTOR. IN ADDITION TO THE REQUIREMENTS NOTED ABOVE, ARTICLE 1107.07, OF THE STANDARD SPECIFICATIONS, STILL APPLIES.

KEYWAY DIMENSIONS SHOWN ON THE PLANS ARE BASED ON NOMINAL DIMENSIONS UNLESS STATED OTHERWISE. IN ADDITION, THE BEVEL USED ON THE KEYWAY SHALL BE LIMITED TO A MAXIMUM OF 10 DEGREES FROM VERTICAL.

THESE BRIDGE PLANS LABEL ALL REINFORCING STEEL WITH ENGLISH NOTATION (5a1 IS INCH DIAMETER BAR). ENGLISH REINFORCING STEEL RECEIVED IN THE FIELD MAY DISPLAY THE FOLLOWING "BAR DESIGNATION". THE "BAR DESIGNATION" IS THE STAMPED IMPRESSION ON THE REINFORCING BARS, AND IS EQUIVALENT TO THE BAR DIAMETER IN MILLIMETERS.

ENGLISH SIZE	3	4	5	6	7	8	9	10	11
BAR DESIGNATION	10	13	16	19	22	25	29	32	36

TRAFFIC WILL BE MAINTAINED AT ALL TIMES IN ACCORDANCE WITH THE TRAFFIC CONTROL PLANS SHOWN IN THESE PLANS.

TRAFFIC CONTROL ADJACENT TO THE CULVERT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR CONSTRUCTING THE CULVERT AND IS TO COORDINATE CONSTRUCTION OF THE CULVERT WITH THE CONTRACTOR DOING THE GRADING.

ANY DIMENSIONAL TRANSITION REQUIRED BETWEEN EXISTING STRUCTURE AND THE EXTENSION SHALL BE MADE IN THE FIRST _____ OF NEW WORK.

WHEN DE-WATERING PRESENTS A PROBLEM FOR PLACING THE CURTAIN WALLS AS DETAILED, ALTERNATE METHODS SUCH AS STEEL SHEET PILE AND PRECAST CONCRETE WALLS MAY BE APPROVED BUT AT NO ADDITIONAL COST. THE CONTRACTOR IS TO SUBMIT TO THE ENGINEER FOR APPROVAL COMPLETE DRAWINGS OF THE PROPOSED CURTAIN WALL ALTERNATE BEFORE BEGINNING CONSTRUCTION.

REVISED 08-14 - ADDED REINFORCING BAR NOTE THAT ALL BARS AND DOWELS SHALL BE DEFORMED REINFORCEMENT.
REVISED 07-2016 - ADDED THE UPDATED DESIGN VERTICAL AND HORIZONTAL EARTH PRESSURES IN THE GENERAL NOTES.
ENGLISHSINGLECULVERTS.DGN - 1043s2 - THIS SHEET ISSUED 10-08.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

DESIGN TEAM	CULVERT EXTENSION DETAILS (SHEET 2 OF 2)	STANDARD SHEET 1043s2	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:04:35 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1043s2 11x17_pdf.pltcfg

TRAFFIC CONTROL PLAN
NOTE: THE ROADWAY WILL BE OPEN TO THRU TRAFFIC. REFER TO THE TRAFFIC CONTROL PLAN ON THE ROAD PLANS IN THESE PLANS.

TRAFFIC CONTROL PLAN
NOTE: THE ROADWAY WILL BE OPEN TO THRU TRAFFIC. REFER TO THE TRAFFIC CONTROL PLAN ON DESIGN SHEET X.

TRAFFIC CONTROL PLAN
NOTE: THE ROADWAY WILL BE CLOSED TO THRU TRAFFIC. REFER TO THE TRAFFIC CONTROL PLAN ON THE ROAD PLANS IN THESE PLANS.

TRAFFIC CONTROL PLAN
NOTE: THE ROADWAY WILL BE CLOSED TO THRU TRAFFIC. ROAD CLOSURE WILL BE THE RESPONSIBILITY OF THE ROAD CONTRACTOR AS SHOWN ON THE ROAD PLANS.



SECTION NEAR EXTENSION
(SHOWING SPACING OF 5z1 DOWEL REINFORCING BARS)

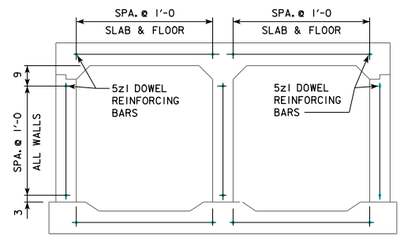

SECTION NEAR TWIN EXTENSION
(SHOWING SPACING OF 5z1 DOWEL REINFORCING BARS)

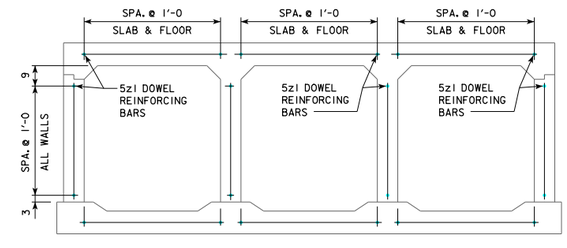

SECTION NEAR TRIPLE EXTENSION
(SHOWING SPACING OF 5z1 DOWEL REINFORCING BARS)

USE THIS DETAIL WHEN EXTENSION LENGTH NEEDS ADDITIONAL BARREL SECTIONS. THE REMAINING SECTS. ARE REFERRED FROM THE CULVERT STANDARDS.

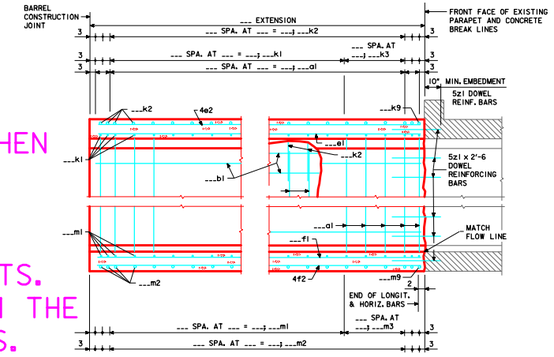

---k3 SLAB, BOTT. TRANSV. FLARED
---m3 FLOOR, TOP TRANSV. FLARED

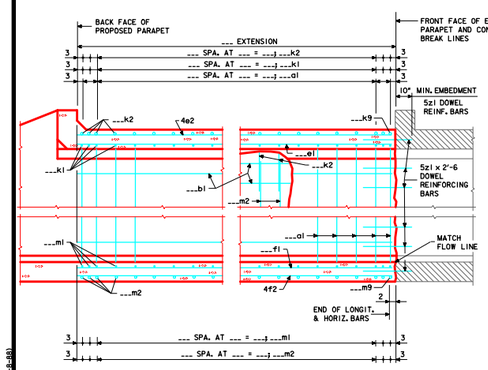

PART LONGITUDINAL SECTION
(ALONG ℄ OF CULVERT)

NOTE: ALL LONGITUDINAL BARREL STEEL SHALL EXTEND AT LEAST TO THE BACKFACE OF PARAPET.



SECTION THRU BARREL
(NORMAL TO ℄ CULVERT)

NOTE: ALL TRANSVERSE REINFORCING BARS AND HORIZONTAL LEGS OF CORNER BARS SHALL BE PLACED PARALLEL TO THE CONCRETE BREAK LINE AND NEW PARAPET EXCEPT AS SHOWN.
DIMENSIONS SHOWN FOR ℄-℄ OF TRANSVERSE BARS, VERTICAL WALL BARS, AND CORNER BARS ARE MEASURED ALONG ℄ CULVERT.
CONCRETE PER FOOT OF BARREL:
SLAB = --- CU. YDS.
WALLS = --- CU. YDS.
FLOOR = --- CU. YDS.
TOTAL = --- CU. YDS.

REINFORCING BAR LIST - ONE EXTENSION

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
---a1	WALLS, F.F.V.	—			
---b1	WALLS, F.F.H. & B.F.H.	—			
---e1	SLAB, BOTT. LONGIT.	—			
4e2	SLAB, TOP LONGIT.	—			
---f1	FLOOR, TOP LONGIT.	—			
4f2	FLOOR, BOTT. LONGIT.	—			
---k1	SLAB, BOTT. TRANSV.	—			
---k2	SLAB, TOP CORNER	⌐			
---m1	FLOOR, TOP TRANSV.	—			
---m2	FLOOR, BOTT. CORNER	L			
5z1	DOWEL REINFORCING BARS	—		2'-6	
	REINFORCING STEEL - TOTAL (LBS.)				

BENT BAR DETAILS



NOTE: ALL DIMENSIONS ARE OUT TO OUT. D = PIN DIAMETER.

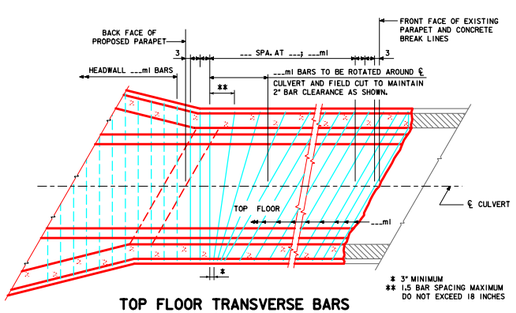

TOP FLOOR TRANSVERSE BARS
(REQUIRED FOR SKEWED CULVERTS ONLY)

FLARED WING EXAMPLE FOR NEW HEADWALL

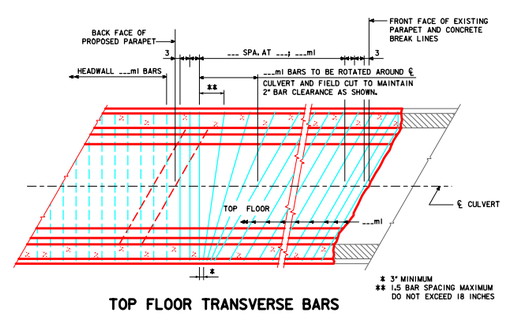

TOP FLOOR TRANSVERSE BARS
(REQUIRED FOR SKEWED CULVERTS ONLY)



PART REMOVAL PLAN

FOR EXISTING SKEWED HEADWALLS USE THIS SHEET.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. _____ DESIGN NO. _____

DESIGN TEAM	CULVERT EXTENSION DETAILS	STANDARD SHEET 1044	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:04:36 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\English\LRFDSingleCulverts.dgn 1044 11x17.pdf.pltcfg

REVISED "K2" CHANGED TO "K1" ON "PART LONGITUDINAL SECTION". TAPE NO.19, DATED 11-9-92.
REVISED 11-00 - "PART LONGITUDINAL SECTION" REVISED TO SHOW ALL REINFORCING BARS OUTSIDE OF BORDER SHEET.
REVISED 11-02 - "PART LONGITUDINAL SECTION" REVISED TO SHOW ALL REINFORCING BARS OUTSIDE OF BORDER SHEET.
REVISED 09-03 - NOTE ADDED TO SPECIFY LONGITUDINAL STEEL IS TO BE EXTENDED TO BACK OF PARAPET.
REVISED 02-12 - CHANGED "PART LONGITUDINAL SECTION" TO "PART LONGITUDINAL SECTION" AND ADDED THE EXISTING PARAPET AT PART LONGIT. SECTION.
REVISED 04-12 - UPDATED TO LRFD SPECS. NEW HEADWALL CHANGES TO PARALLEL WING TYPE. FLARED WING DETAIL OUTSIDE OF BORDER SHEET.
REVISED 04-13 - CHANGED THE SPACING OF THE B1 BARS TO 6 INCH SPACINGS IN ALL DETAILS. REMOVED BAR SIZES FROM b1, e1, & f1 BARS.
REVISED 07-13 - CHANGED THE 1" Ø DOWELS TO 5z1 DOWEL REINFORCING BARS.
CORRECTION 05-14 - ADDED THE BAR LABELS K9 & m9 TO THE PART LONGIT. SECTIONS.
(E1045.01) (BSTD01044.STD)--FED THIS SHEET BEFORE MAKING REVISIONS (DGN FILE NO.15 DATE 3-8-88)

USE THIS DETAIL WHEN EXTENSION LENGTH NEEDS ADDITIONAL BARREL SECTIONS. THE REMAINING SECTS. ARE REFERRED FROM THE CULVERT STANDARDS.

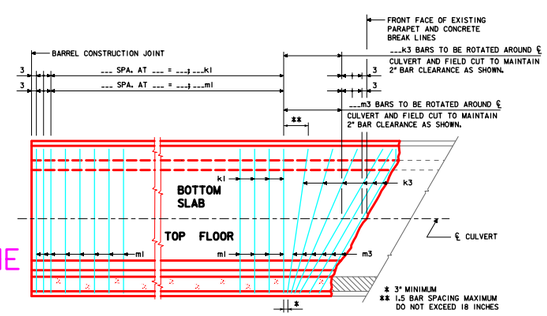

SLAB & FLOOR TRANSVERSE BARS LAYOUT
(REQUIRED FOR SKEWED CULVERTS ONLY)



PART REMOVAL PLAN

FOR 0° SKEW EXTENSION - PLACE THIS DETAIL ON PLANS

_____ END SECTION PARAPET DETAILS

REINFORCING BAR LIST - END SECTION PARAPET

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4i1	PARAPET, VERTICAL			6'-5	
7j1	PARAPET, HORIZONTAL		4		
				TOTAL - LBS.	

CONCRETE ABOVE SLAB

PARAPET = ____ CU.YDS.



4i1

D = PIN DIAMETER
ALL DIMENSIONS
ARE OUT TO OUT.

BENT BAR DETAILS

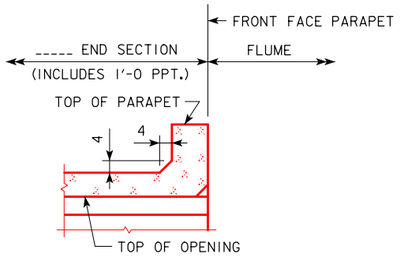

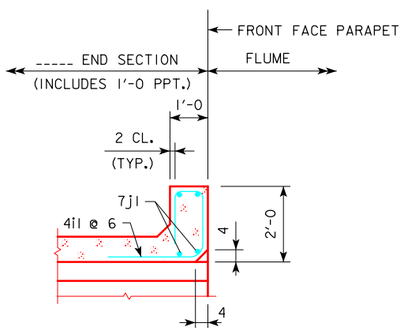

SECTION THRU PARAPET



PLAN VIEW

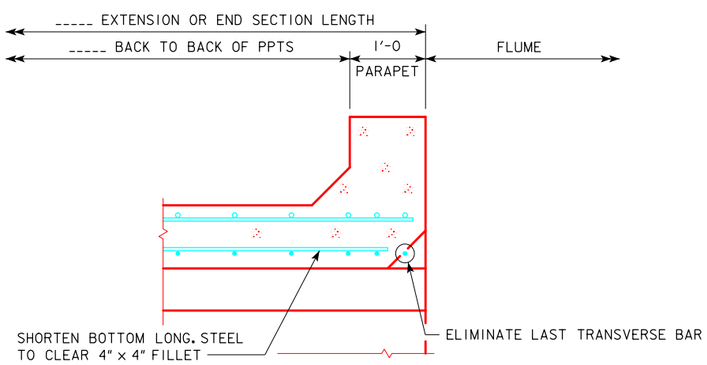

BARREL END SECTION AND PARAPET DETAILS WITH FLUME OUTLET

NOTE: ADD PARAPET CONCRETE AND REINFORCING STEEL TO BARREL END SECTION QUANTITY.

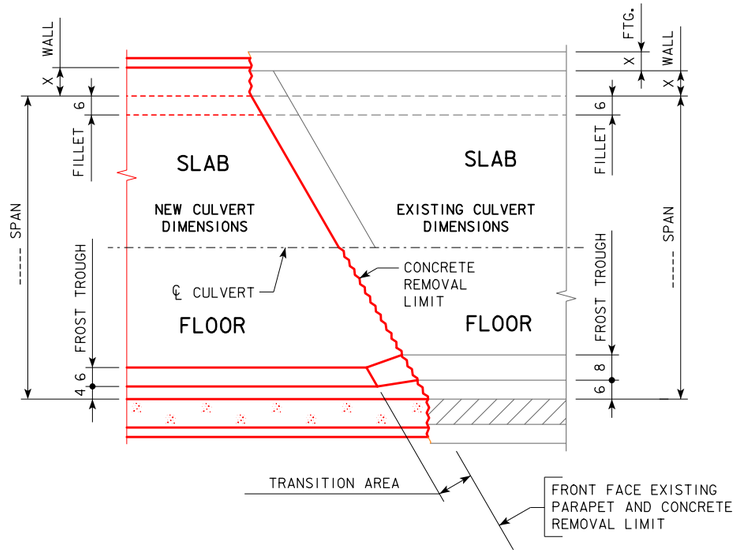

CONCRETE TRANSITION DETAILS

(PLAN VIEW)

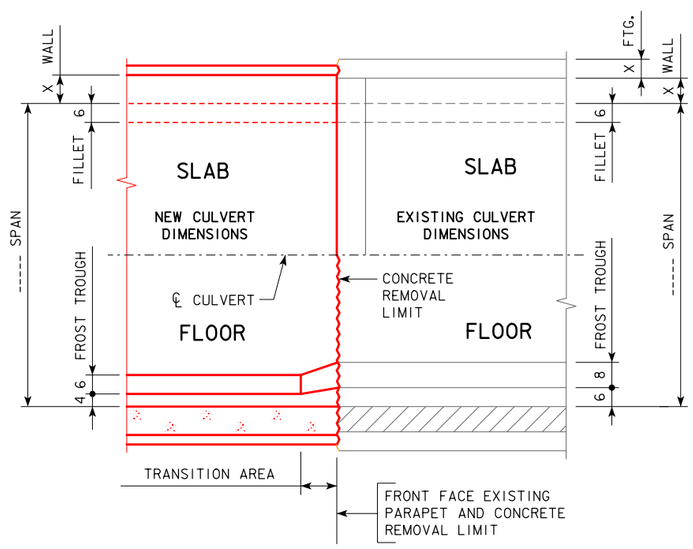

CONCRETE TRANSITION DETAILS

(PLAN VIEW)

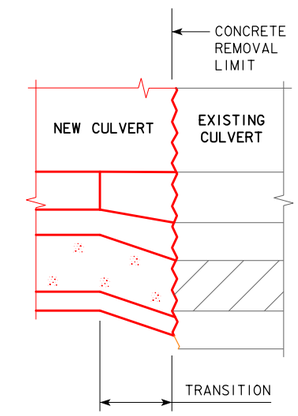

NEW BARREL CONCRETE THICKNESSES SHALL BE MAINTAINED MINIMALLY WHEN TRANSITIONING TO MEET EXISTING BARREL INTERIOR SURFACES. OUTSIDE CONCRETE SURFACES DO NOT HAVE TO BE TRANSITIONED TO MATCH EXISTING SURFACES.

CONCRETE TRANSITION DETAILS

(WALL TRANSITION SHOWN - TYPICAL FOR SLAB)

NOTE: REFER TO THE BRIDGE DESIGN MANUAL, SECTION 7 FOR CULVERT EXTENSION DETAILS FOR TRANSITION INFORMATION.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION

DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

REVISED: CHANGED BRIDGE DESIGN MANUAL, SECTION 8 TO SECTION 7. (3-1-15)
ENGLISHSINGLECULVERTS.DGN - 1047 - THIS SHEET ISSUED 03-12.

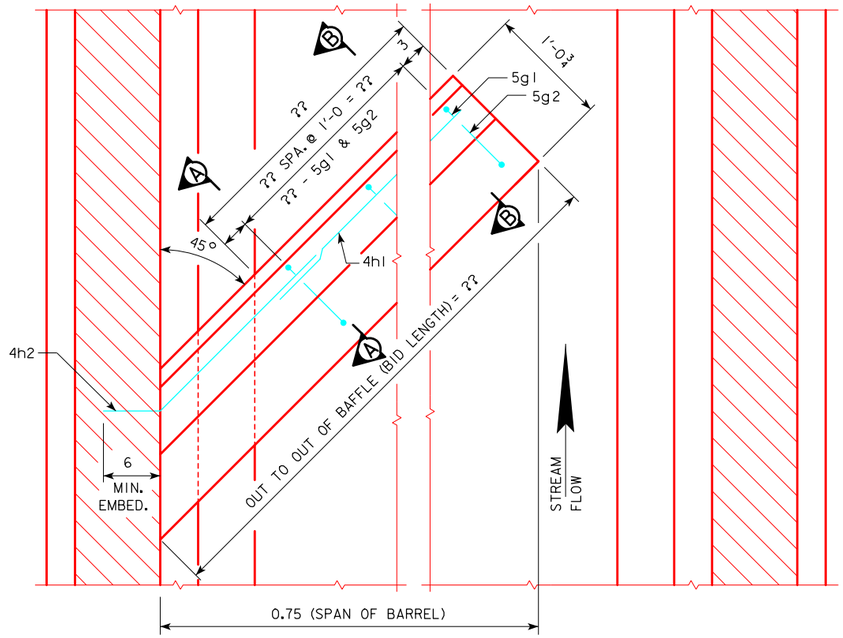

BAFFLE PLAN

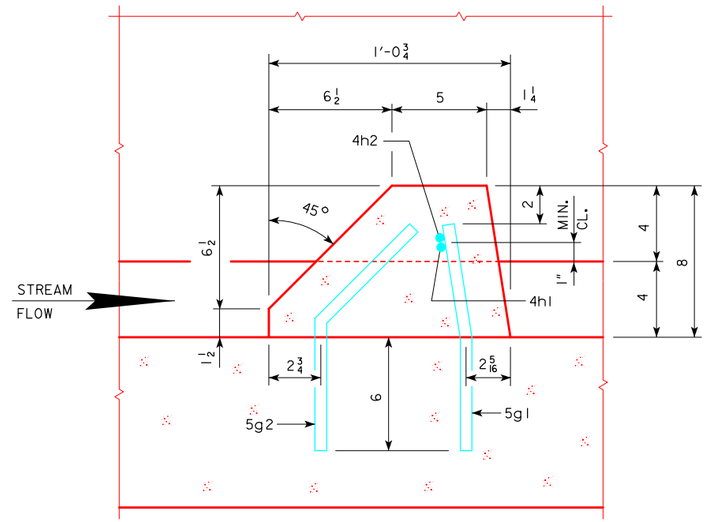

SECTION A-A

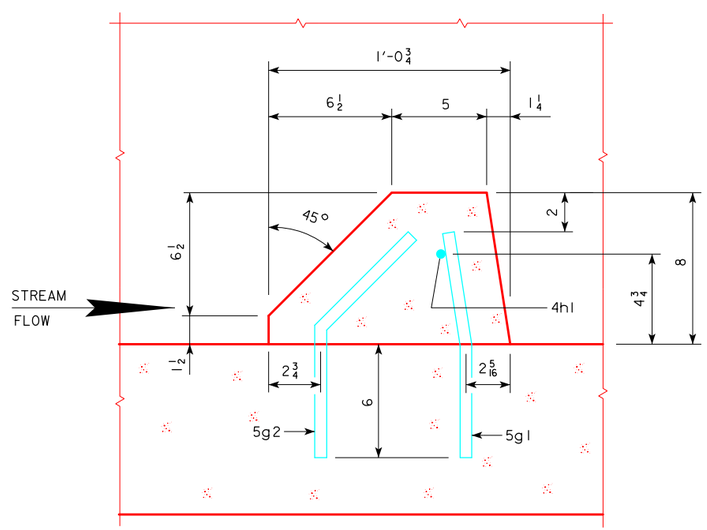

SECTION B-B

BENT BAR DETAILS

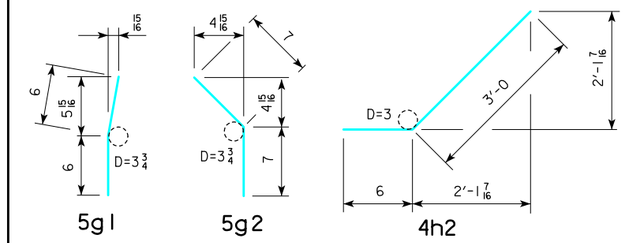

NOTE: ALL DIMENSIONS ARE OUT TO OUT. D = PIN DIAMETER.

BAFFLE NOTES:

1. ?? BAFFLES ARE TO BE PLACED WITHIN THE REINFORCED CONCRETE BOX CULVERT SPACED AS SHOWN ELSEWHERE IN THESE PLANS. BAFFLES SHALL BE CONSTRUCTED TO THE DIMENSIONS SHOWN ON THIS SHEET.
2. CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.
3. ALL CONCRETE IS TO BE CLASS C.
4. MINIMUM SPLICE LENGTH FOR THE 4h1 AND 4h2 BARS IS 13".
5. THE 5g1, 5g2 AND 4h2 BARS SHALL BE SET AS DOWELS IN DRILLED HOLES. HOLES ARE TO BE 6" DEEP. THE DOWELS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE DOWELS SHALL BE INSTALLED USING A POLYMER GROUT SYSTEM IN ACCORDANCE WITH ARTICLE 2301.03,E, OF THE STANDARD SPECIFICATIONS.
6. BONDING OF THE BAFFLES TO THE BARREL FLOOR SHALL BE IN ACCORDANCE WITH ARTICLE 2403.03,I, OF THE STANDARD SPECIFICATIONS.
7. THE BAFFLES ARE TO BE BID ON A LINEAL FOOT BASIS. THE NUMBER OF LINEAL FEET OF BAFFLE INSTALLED WILL BE PAID FOR AT THE CONTRACT PRICE PER LINEAL FOOT FOR "BAFFLE OR WEIR FOR REINFORCED CONCRETE BOX CULVERT" BASED ON PLAN QUANTITY. PRICE BID FOR "BAFFLE OR WEIR FOR REINFORCED CONCRETE BOX CULVERT" SHALL BE FULL COMPENSATION FOR FURNISHING ALL MATERIAL AND ALL OF THE EQUIPMENT AND LABOR REQUIRED TO CONSTRUCT THE BAFFLES IN ACCORDANCE WITH THESE PLANS AND CURRENT SPECIFICATIONS.
8. CROSS SECTIONAL AREA OF THE BAFFLE IS 0.53 SQUARE FEET.

BAFFLE QUANTITIES

ITEM	UNIT	QUANTITY
BAFFLE FOR RCB CULVERT	L.F.	

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION

DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

REVISION 04-12 - UPDATED STANDARD TO LRFD SPECIFICATIONS.
ENGLISHSINGLECULVERTS - 1060 - THIS SHEET ISSUED 09-03.

DESIGN TEAM	CULVERT BAFFLE DETAILS	STANDARD SHEET 1060	COUNTY	PROJECT NUMBER	SHEET NUMBER

BENT BAR DETAILS

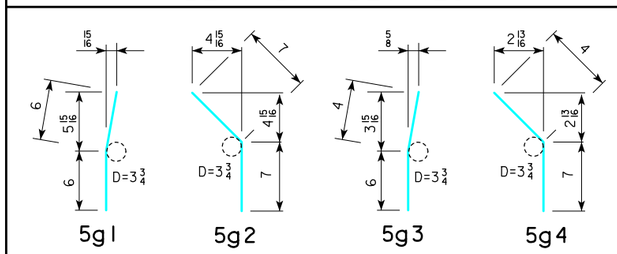

NOTE: ALL DIMENSIONS ARE OUT TO OUT. D = PIN DIAMETER.

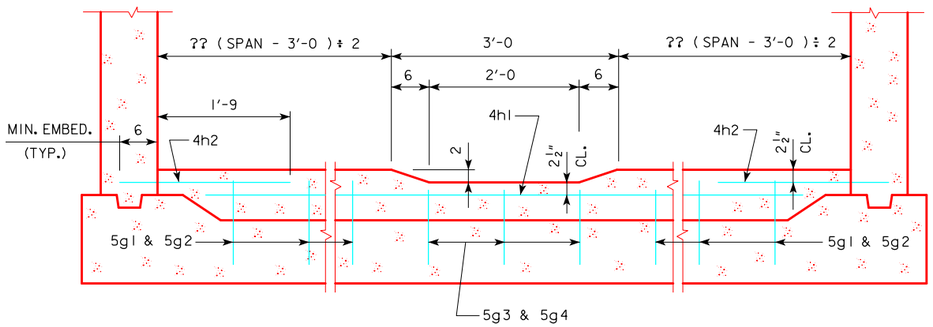

WEIR ELEVATION

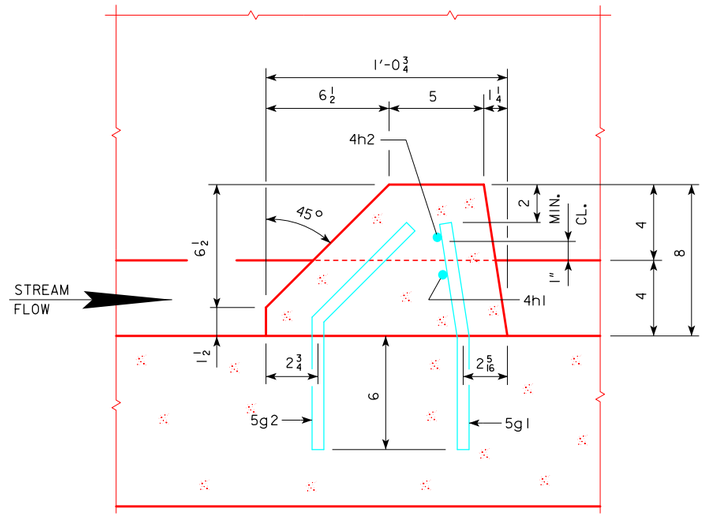

SECTION A-A

WEIR NOTES:

1. ?? WEIRS ARE TO BE PLACED WITHIN THE REINFORCED CONCRETE BOX CULVERT SPACED AS SHOWN ELSEWHERE IN THESE PLANS. WEIRS SHALL BE CONSTRUCTED TO THE DIMENSIONS SHOWN ON THIS SHEET.
2. CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.
3. ALL CONCRETE IS TO BE CLASS C.
4. MINIMUM SPLICE LENGTH FOR THE 4h1 AND 4h2 BARS IS 13".
5. THE 5g1, 5g2, 5g3, 5g4 AND 4h2 BARS SHALL BE SET AS DOWELS IN DRILLED HOLES. HOLES ARE TO BE 6" DEEP. THE DOWELS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE DOWELS SHALL BE INSTALLED USING A POLYMER GROUT SYSTEM IN ACCORDANCE WITH ARTICLE 2301.03,E, OF THE STANDARD SPECIFICATIONS.
6. BONDING OF THE WEIRS TO THE BARREL FLOOR SHALL BE IN ACCORDANCE WITH ARTICLE 2403.03,I, OF THE STANDARD SPECIFICATIONS.
7. IF BARREL SPAN IS LESS THAN 6' THEN 4h2 BARS SHALL BE FIELD BENT TO PROVIDE 2" MIN. CLEAR DISTANCE FROM THE TOP OF THE NOTCH.
8. THE WEIRS ARE TO BE BID ON A LINEAL FOOT BASIS. THE NUMBER OF LINEAL FEET OF WEIR INSTALLED WILL BE PAID FOR AT THE CONTRACT PRICE PER LINEAL FOOT FOR "BAFFLE OR WEIR FOR REINFORCED CONCRETE BOX CULVERT" BASED ON PLAN QUANTITY. PRICE BID FOR "BAFFLE OR WEIR FOR REINFORCED CONCRETE BOX CULVERT" SHALL BE FULL COMPENSATION FOR FURNISHING ALL MATERIAL AND ALL OF THE EQUIPMENT AND LABOR REQUIRED TO CONSTRUCT THE WEIRS IN ACCORDANCE WITH THESE PLANS AND CURRENT SPECIFICATIONS.
9. CROSS SECTIONAL AREA OF THE WEIR IS 0.53 SQUARE FEET.

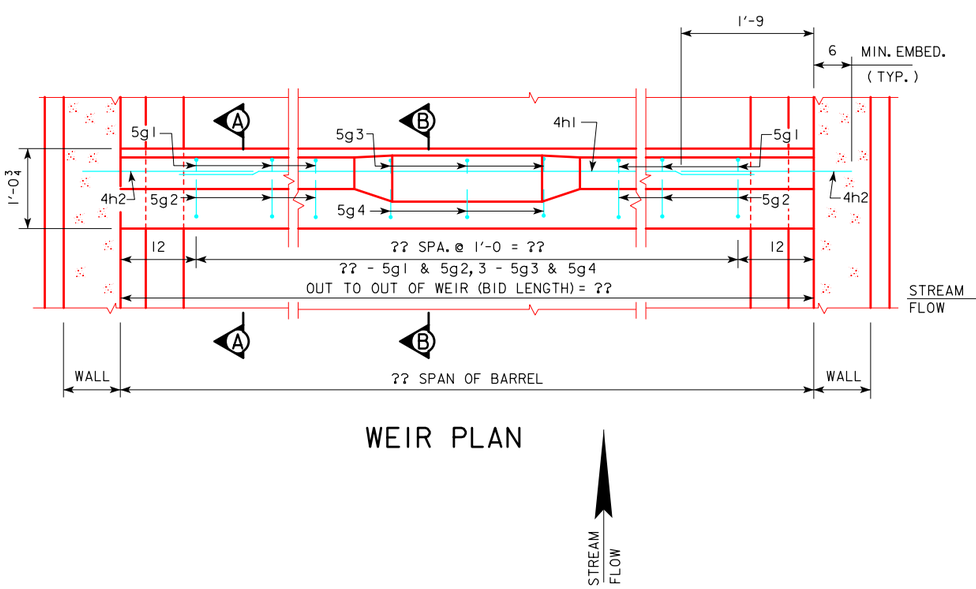

WEIR PLAN

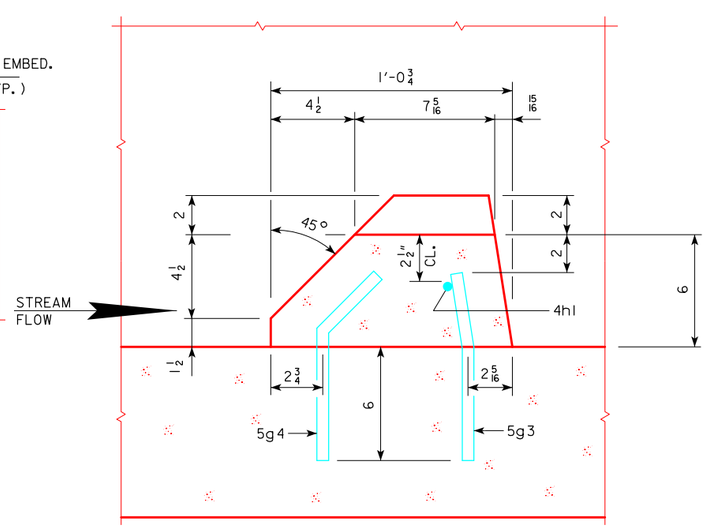

SECTION B-B

WIER QUANTITIES

ITEM	UNIT	QUANTITY
WIER FOR RCB CULVERT	L.F.	

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION

DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

DESIGN TEAM	CULVERT WEIR DETAILS	STANDARD SHEET 1061	COUNTY	PROJECT NUMBER	SHEET NUMBER

REVISION 04-12 - UPDATED SHEET TO LRFD SPECIFICATIONS.
ENGLISHSINGLECULVERTS - 1061 - THIS SHEET ISSUED 09-03.

6/28/2016 1:04:39 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1061 11x17_pdf.pltcfg

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		2		
4b2	WALLS BFH		2		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
5c1	BOTT. FLOOR & WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

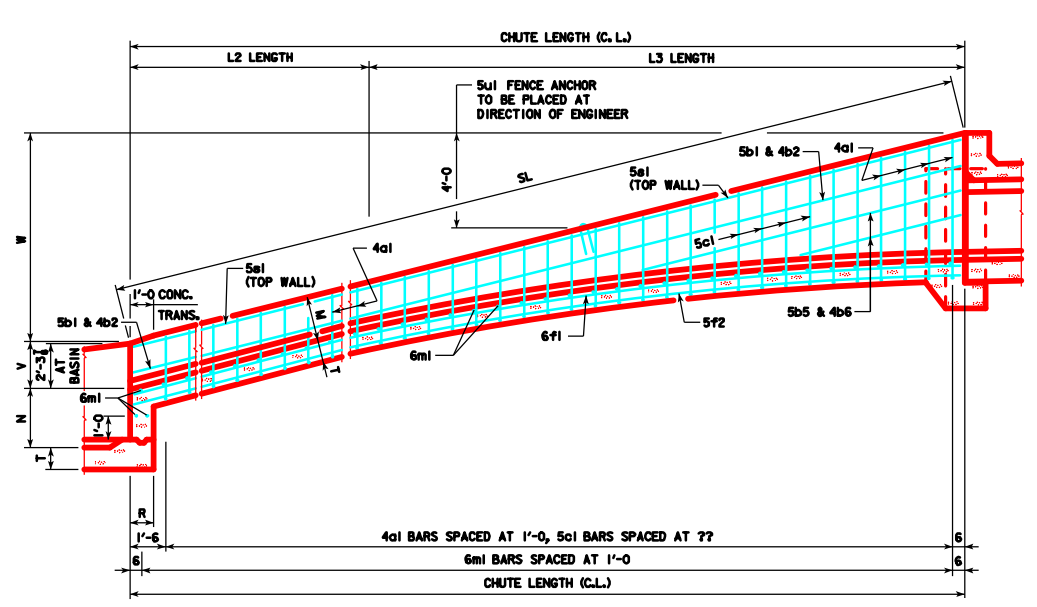

?'x3' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∡ A = 18°26′
∡ C = 1°00′
B = 9'-9⅝
SL =
V = 2'-4½
W =
M = 2'-3
T = 0'-11
H = 3'-0

CURVE DATA

C. L. =
L2 =
L3 = 18'-8⅞
D = 9'-4½
E = 9'-3⅞
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 2'-11⅜
X2 = 1'-7⅞
X3 = 0'-8⅞
X4 = 0'-2¼
L3/4 = 4'-8⅛(-)

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
1070 SOL - THIS SHEET ISSUED 09-01

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM	FLUME CHUTE DETAILS - 3' HEIGHT	STANDARD SHEET 1070		COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:04:41 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1070 11x17.pdf.pltcfg

3:1 SLOPE FLUME

FLUME DATA

∡ A = 18°26′
∡ C = 1°00′
B = 9'-9⅝
SL =
V = 2'-4½
W =
M = 2'-3
T = 0'-11
H = 3'-0

CURVE DATA

C. L. =
L2 =
L3 = 18'-8⅞
D = 9'-4½
E = 9'-3⅞
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 2'-11⅜
X2 = 1'-7⅞
X3 = 0'-8⅞
X4 = 0'-2¼
L3/4 = 4'-8⅛(-)

4:1 SLOPE FLUME

FLUME DATA

∡ A = 14°02′
∡ C = 1°00′
B = 13'-3 11/16
SL =
V = 2'-3⅞
W =
M = 2'-3
T = 0'-11
H = 3'-0

CURVE DATA

C. L. =
L2 =
L3 = 25'-10 7/16
D = 12'-11 1/16
E = 12'-10⅞
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-0
X2 = 1'-8¼
X3 = 0'-9
X4 = 0'-2¼
L3/4 = 6'-5⅝(-)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		2		
4b2	WALLS BFH - SECTION 1		2		
5b3	WALLS FFH - SECTION 2		2		
4b4	WALLS BFH - SECTION 2		2		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
5c1	BOTT. FLOOR & WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2			9'-2	
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

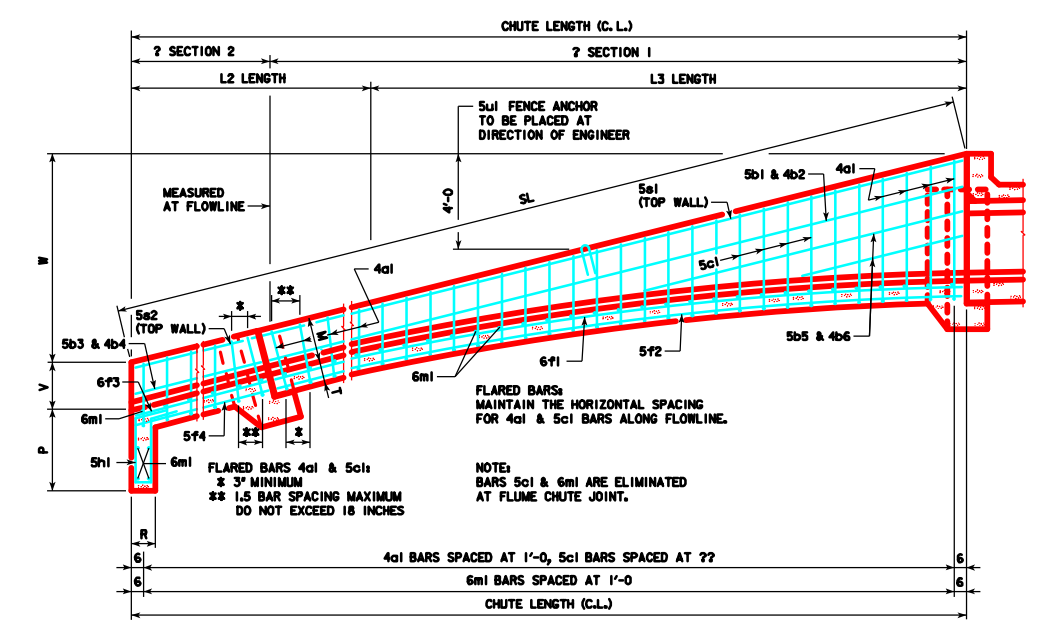

?'x3' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		2		
4b2	WALLS BFH		2		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
5c1	BOTT. FLOOR & WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

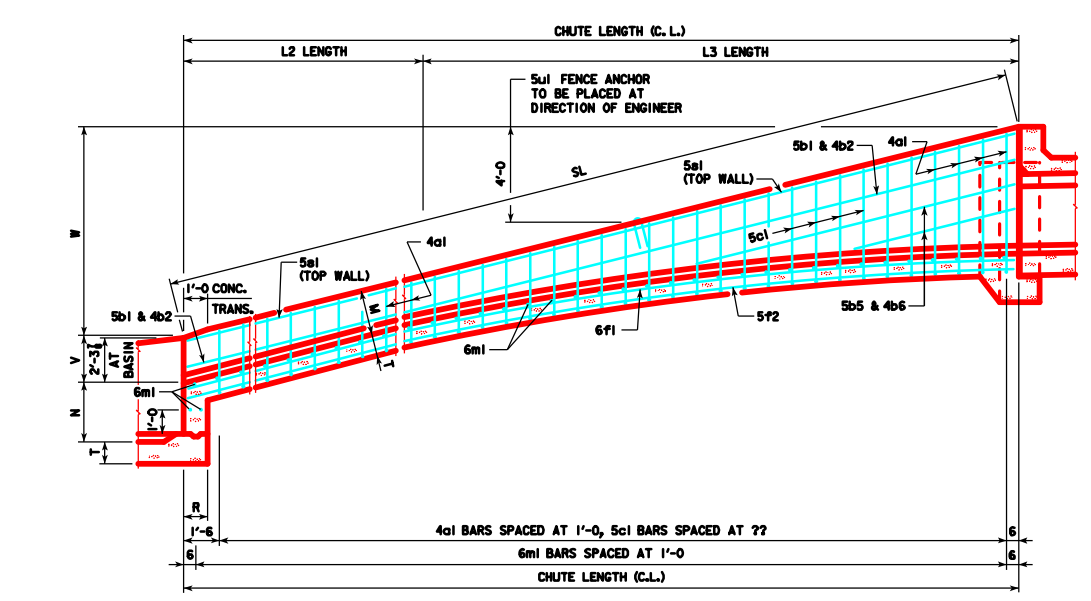

?'x3' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		2		
4b2	WALLS BFH		2		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
5c1	BOTT. FLOOR & WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN			9'-2	
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

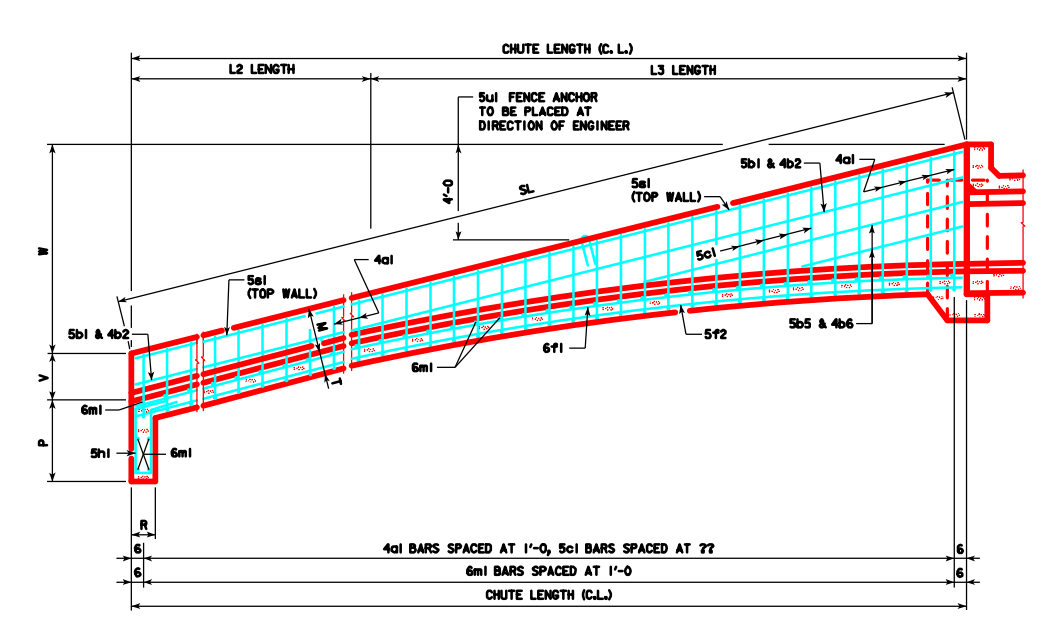

?'x3' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		2		
4b2	WALLS BFH - SECTION 1		2		
5b3	WALLS FFH - SECTION 2		2		
4b4	WALLS BFH - SECTION 2		2		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
5c1	BOTT. FLOOR & WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

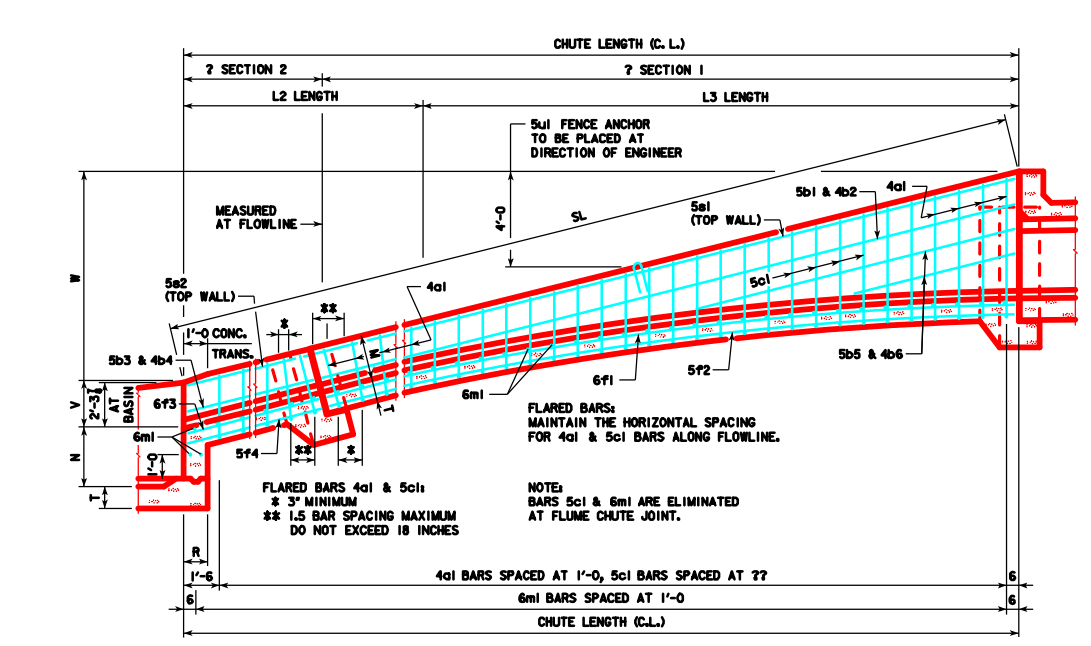

?'x3' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
1071(S01) - THIS SHEET ISSUED 09-03

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

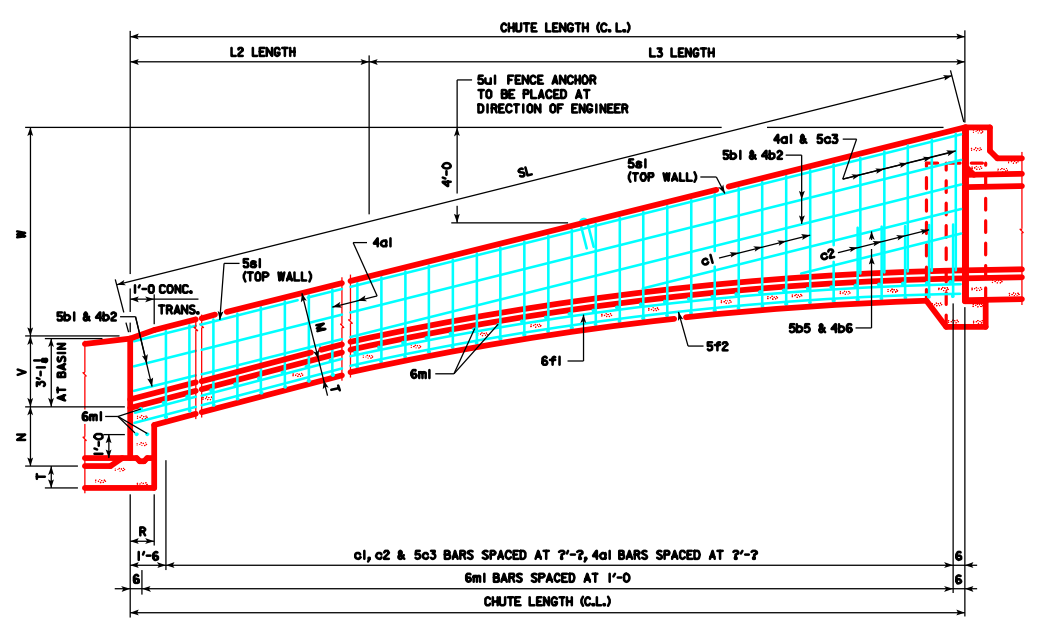

?'x4' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA

C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

3:1 SLOPE FLUME

4 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

5 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

6 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

8 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 1'-0
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

10 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 1'-1
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

12 x 4

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 10'-6 5/16
SL =
V = 3'-2
W =
M = 3'-0
T = 1'-2
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 20'-0 1/4
D = 10'-0 7/16
E = 9'-11 13/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-1 7/8
X2 = 1'-9 1/4
X3 = 0'-9 7/16
X4 = 0'-2 3/8
L3/4 = 5'-0 1/16

4:1 SLOPE FLUME

4 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

5 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

6 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 0'-11
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

8 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 1'-0
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

10 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 1'-1
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

12 x 4

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 14'-3 11/16
SL =
V = 3'-1 1/8
W =
M = 3'-0
T = 1'-2
H = 4'-0

CURVE DATA
C. L. =
L2 =
L3 = 27'-9 13/16
D = 13'-11 1/4
E = 13'-10 3/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-2 3/4
X2 = 1'-9 3/4
X3 = 0'-9 11/16
X4 = 0'-2 7/16
L3/4 = 6'-11 7/16(+)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

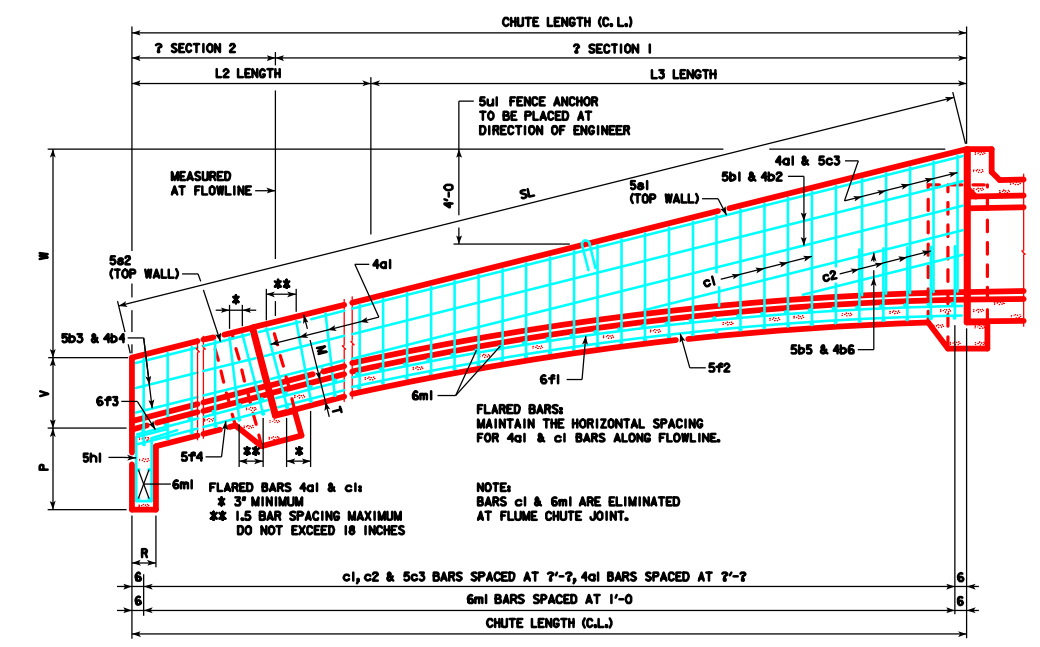

?'x4' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

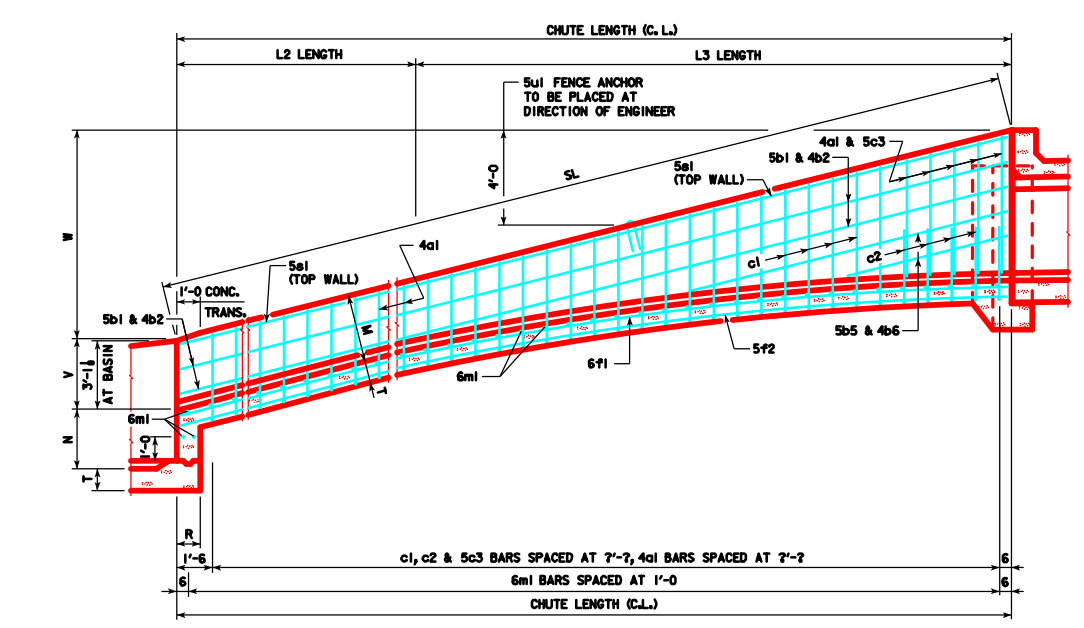

?'x4' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

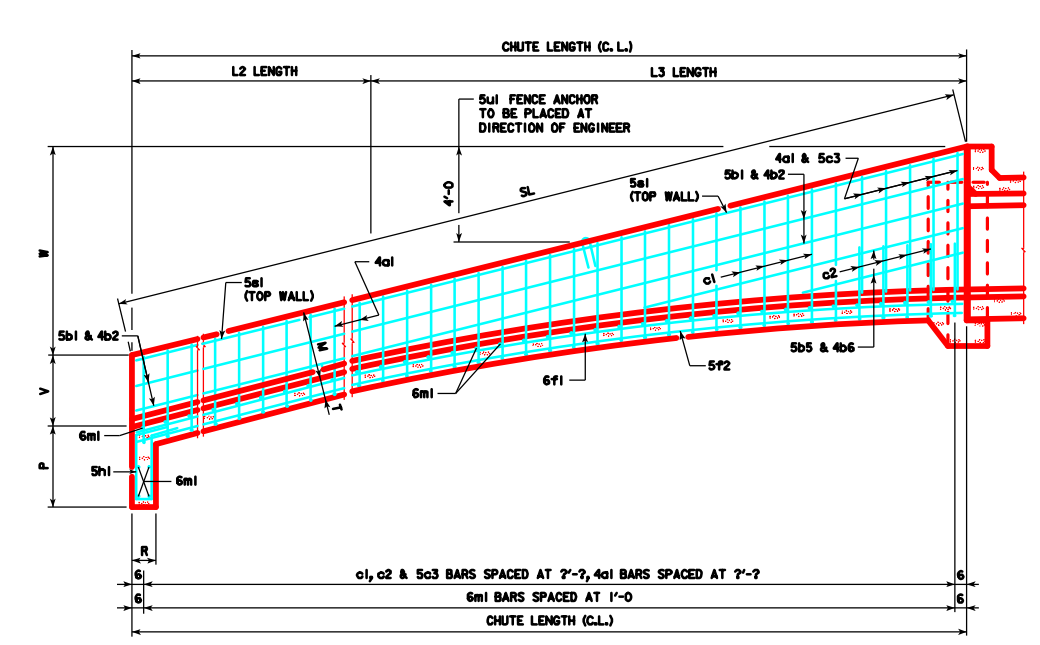

?'x4' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

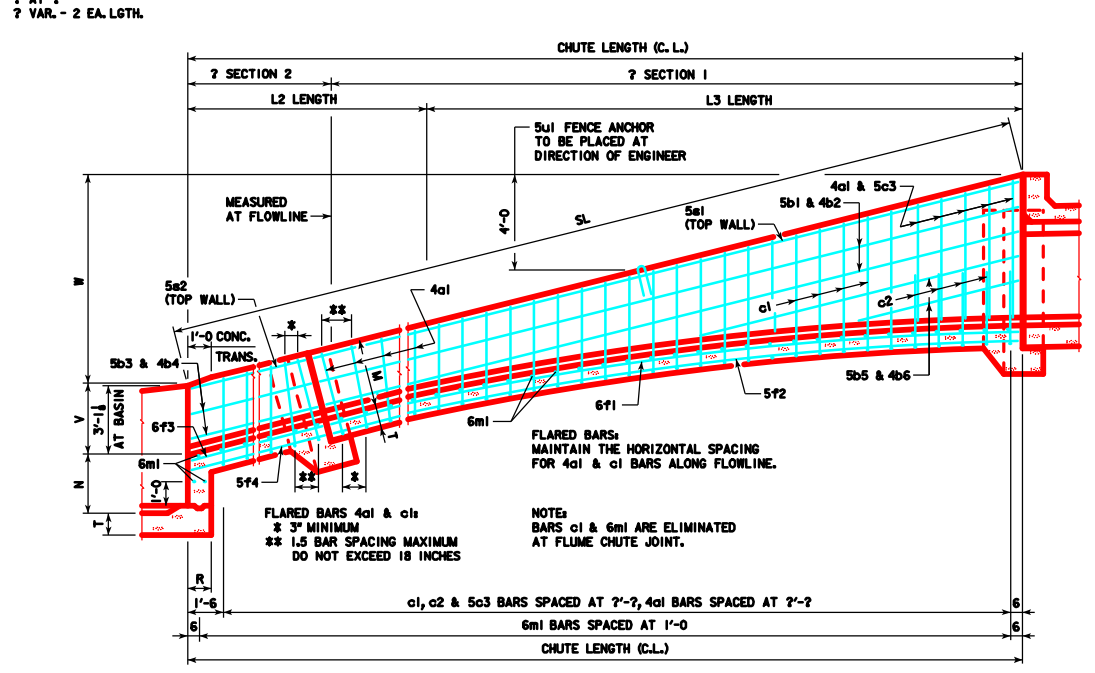

?'x4' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∠A = 18°26'
∠C = 1°00'
B = 11'-2 5/8
SL =
V = 3'-11 3/8
W =
M = 3'-9
T = 0'-11
H = 5'-0

CURVE DATA

C. L. =
L2 =
L3 = 21'-4 1/8
D = 10'-8 7/16
E = 10'-7 11/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-4 5/16
X2 = 1'-10 11/16
X3 = 0'-10 1/16
X4 = 0'-2 1/2
L3/4 = 5'-4 1/16(-)

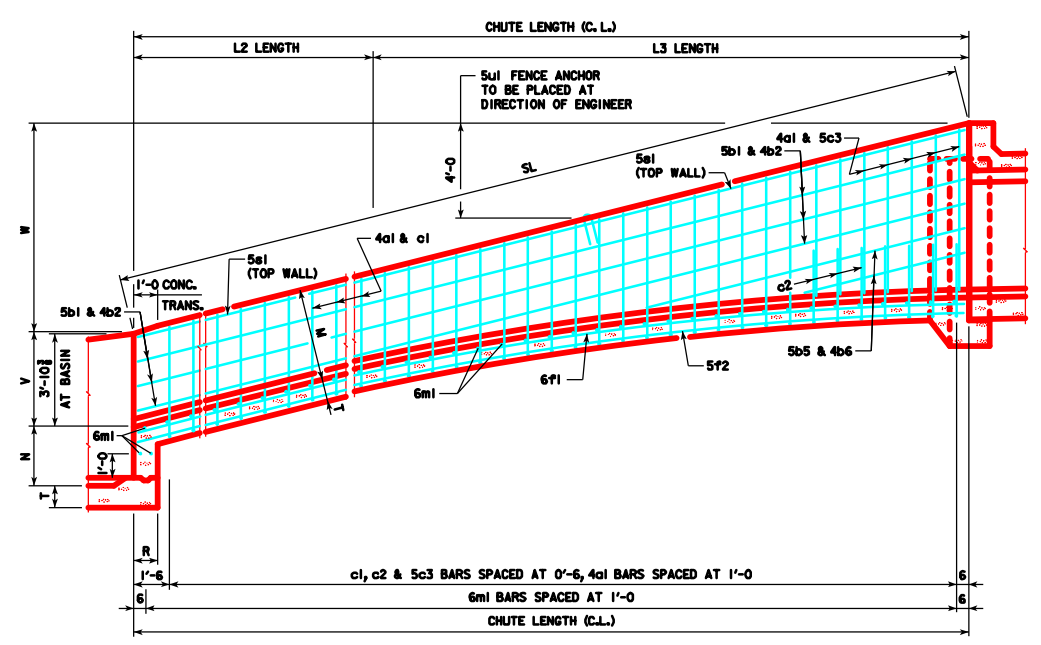

?'x5' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:
1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
1072SOL - THIS SHEET ISSUED 09-01

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM | FLUME CHUTE DETAILS - 5' HEIGHT | STANDARD SHEET 1072 | COUNTY | PROJECT NUMBER | SHEET NUMBER

6/28/2016 1:04:45 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1072 11x17.pdf.pltcfg

3:1 SLOPE FLUME

	5 x 5	6 x 5	8 x 5	10 x 5	12 x 5
FLUME DATA					
∠A	18°26'	18°26'	18°26'	18°26'	18°26'
∠C	1°00'	1°00'	1°00'	1°00'	1°00'
B	11'-2 5/8	11'-2 5/8	11'-2 5/8	11'-2 5/8	11'-2 5/8
SL					
V	3'-11 3/8	3'-11 3/8	3'-11 3/8	3'-11 3/8	3'-11 3/8
W					
M	3'-9	3'-9	3'-9	3'-9	3'-9
T	0'-11	0'-11	1'-0	1'-1	1'-2
H	5'-0	5'-0	5'-0	5'-0	5'-0
CURVE DATA					
C. L.					
L2					
L3	21'-4 1/8	21'-4 1/8	21'-4 1/8	21'-4 1/8	21'-4 1/8
D	10'-8 7/16	10'-8 7/16	10'-8 7/16	10'-8 7/16	10'-8 7/16
E	10'-7 11/16	10'-7 11/16	10'-7 11/16	10'-7 11/16	10'-7 11/16
P. C. ELEV.					
P.I. ELEV.					
P. P. ELEV.					
P. T. ELEV.					
X1	3'-4 5/16	3'-4 5/16	3'-4 5/16	3'-4 5/16	3'-4 5/16
X2	1'-10 11/16	1'-10 11/16	1'-10 11/16	1'-10 11/16	1'-10 11/16
X3	0'-10 1/16	0'-10 1/16	0'-10 1/16	0'-10 1/16	0'-10 1/16
X4	0'-2 1/2	0'-2 1/2	0'-2 1/2	0'-2 1/2	0'-2 1/2
L3/4	5'-4 1/16(-)	5'-4 1/16(-)	5'-4 1/16(-)	5'-4 1/16(-)	5'-4 1/16(-)

4:1 SLOPE FLUME

	5 x 5	6 x 5	8 x 5	10 x 5	12 x 5
FLUME DATA					
∠A	14°02'	14°02'	14°02'	14°02'	14°02'
∠C	1°00'	1°00'	1°00'	1°00'	1°00'
B	15'-3 11/16	15'-3 11/16	15'-3 11/16	15'-3 11/16	15'-3 11/16
SL					
V	3'-10 3/8	3'-10 3/8	3'-10 3/8	3'-10 3/8	3'-10 3/8
W					
M	3'-9	3'-9	3'-9	3'-9	3'-9
T	0'-11	0'-11	1'-0	1'-1	1'-2
H	5'-0	5'-0	5'-0	5'-0	5'-0
CURVE DATA					
C. L.					
L2					
L3	29'-9 3/16	29'-9 3/16	29'-9 3/16	29'-9 3/16	29'-9 3/16
D	14'-10 5/16	14'-10 5/16	14'-10 5/16	14'-10 5/16	14'-10 5/16
E	14'-10 1/4	14'-10 1/4	14'-10 1/4	14'-10 1/4	14'-10 1/4
P. C. ELEV.					
P.I. ELEV.					
P. P. ELEV.					
P. T. ELEV.					
X1	3'-5 7/16	3'-5 7/16	3'-5 7/16	3'-5 7/16	3'-5 7/16
X2	1'-11 5/16	1'-11 5/16	1'-11 5/16	1'-11 5/16	1'-11 5/16
X3	0'-10 5/16	0'-10 5/16	0'-10 5/16	0'-10 5/16	0'-10 5/16
X4	0'-2 3/16	0'-2 3/16	0'-2 3/16	0'-2 3/16	0'-2 3/16
L3/4	7'-5 5/16(-)	7'-5 5/16(-)	7'-5 5/16(-)	7'-5 5/16(-)	7'-5 5/16(-)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

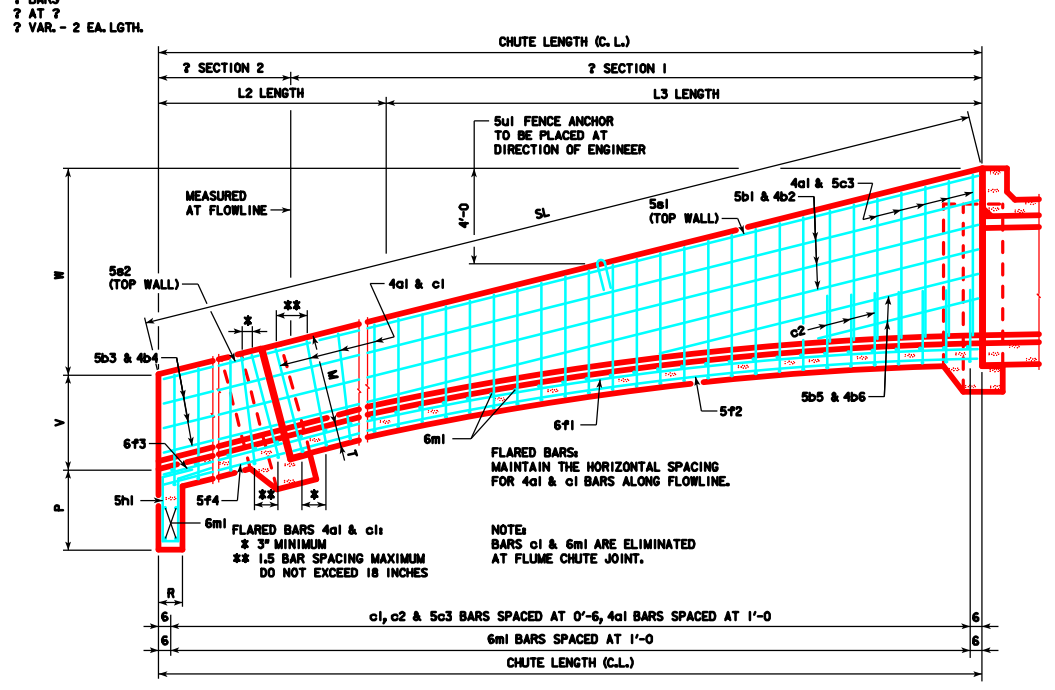

?'x5' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:
1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 2c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

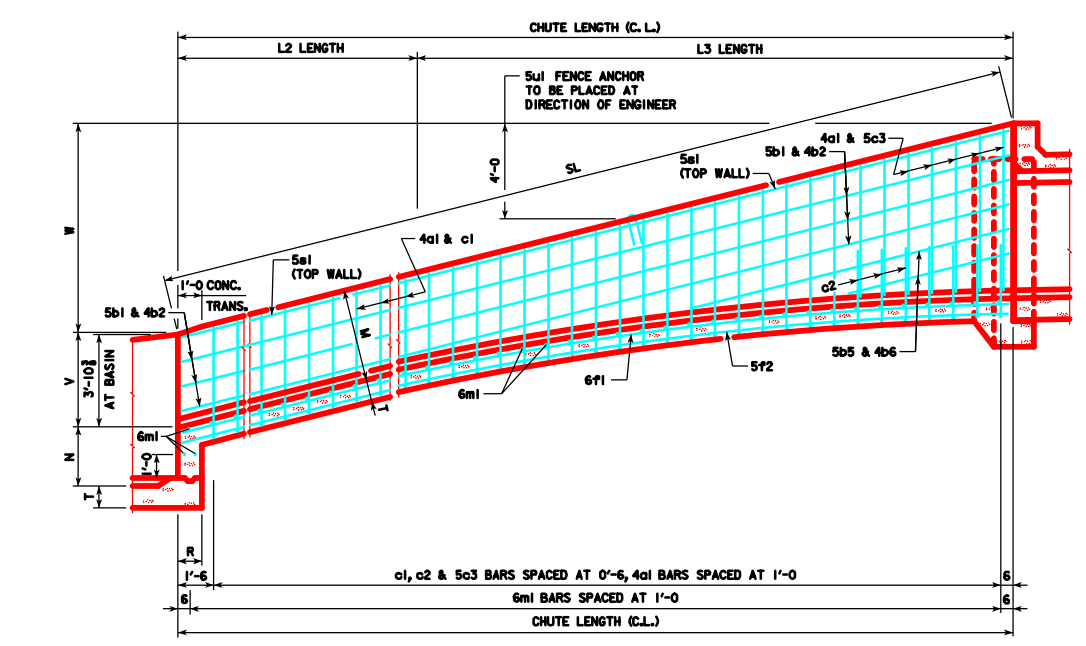

?'x5' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:
1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		4	LISTED	
4b6	WALLS BFH		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

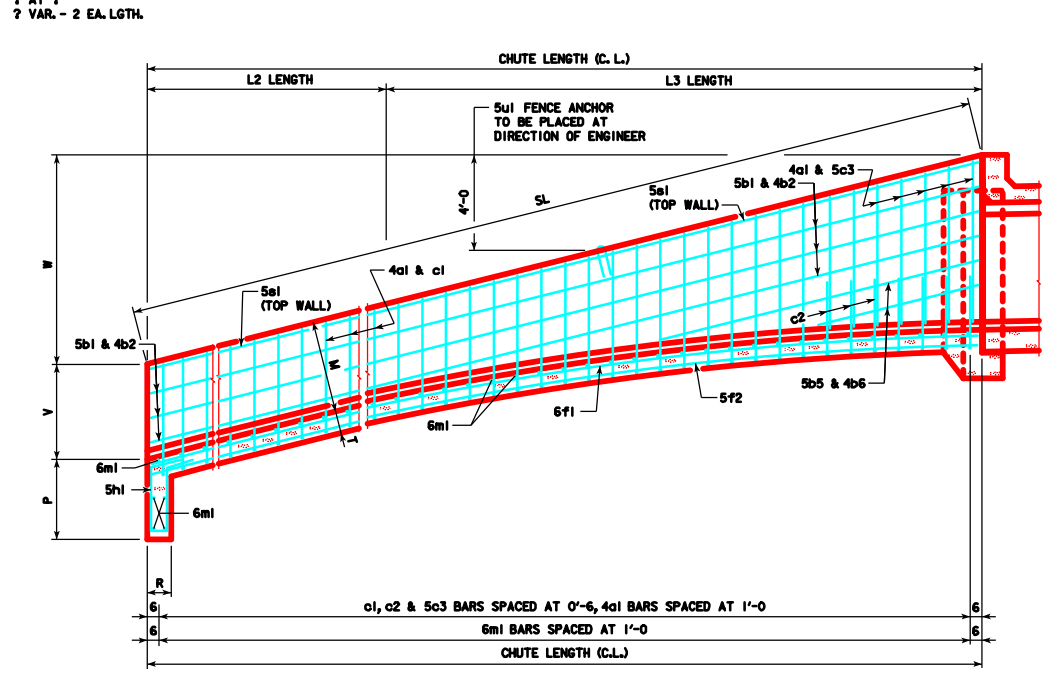

?'x5' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:
1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		4	LISTED	
4b6	WALLS BFH - SECTION 1		4	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
5s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
5s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDE AN ALLOWANCE FOR A 2'-2 LAP BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE THE LAP.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 2c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
4 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

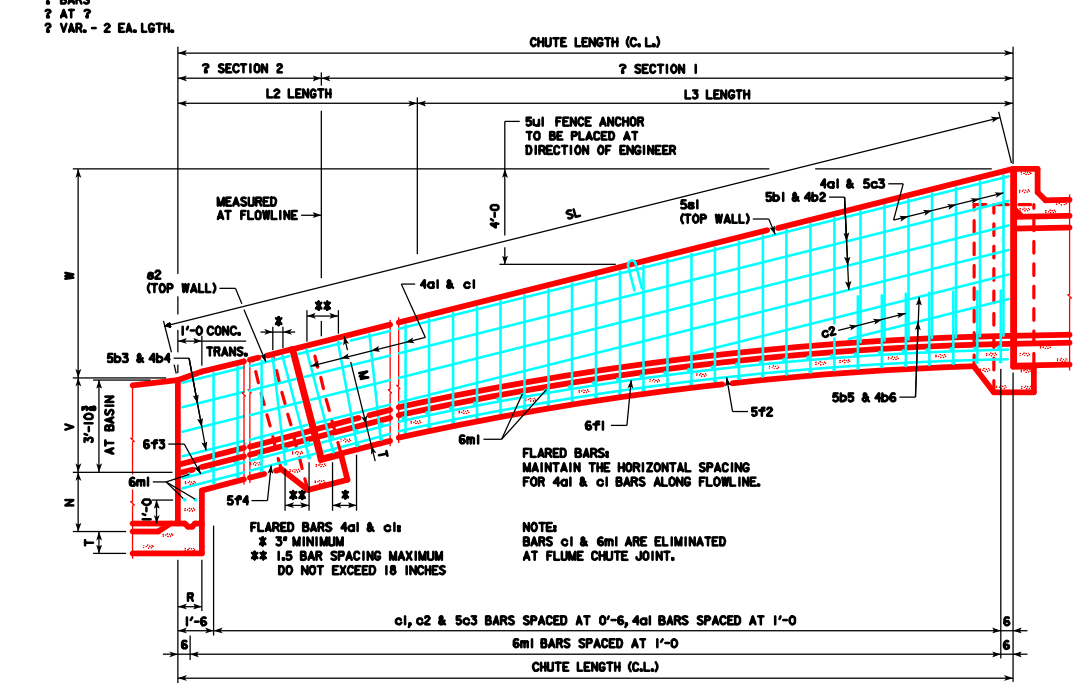

?'x5' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:
1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 0'-11
H = 6'-0

CURVE DATA

C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

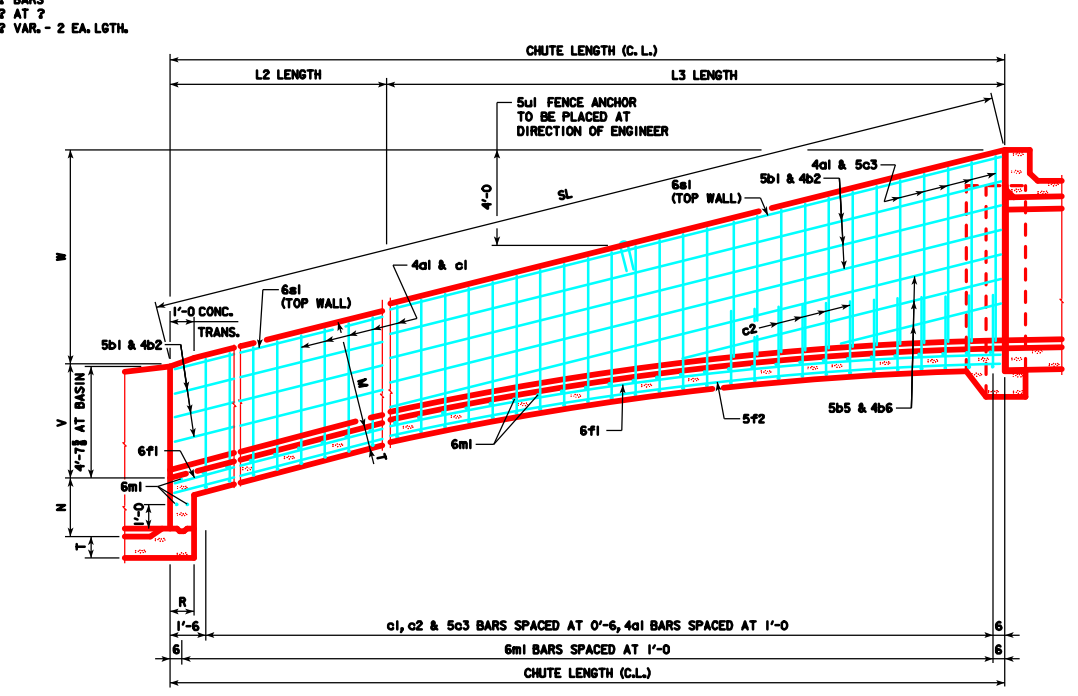

?'x6' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
1073SOL - THIS SHEET ISSUED 09-01

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM	FLUME CHUTE DETAILS - 6' HEIGHT	STANDARD SHEET 1073	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:04:47 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1073 11x17.pdf.pltcfg

3:1 SLOPE FLUME

5 x 6

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 0'-11
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

6 x 6

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 0'-11
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

8 x 6

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 1'-0
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

10 x 6

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 1'-1
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

12 x 6

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 11'-10 5/16
SL =
V = 4'-8 7/8
W =
M = 4'-6
T = 1'-2
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 22'-8
D = 11'-4 3/8
E = 11'-3 5/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-6 13/16
X2 = 2'-0 1/16
X3 = 0'-10 11/16
X4 = 0'-2 11/16
L3/4 = 5'-8

4:1 SLOPE FLUME

5 x 6

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 16'-3 3/4
SL =
V = 4'-7 5/8
W =
M = 4'-6
T = 0'-11
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 31'-8 9/16
D = 15'-10 11/16
E = 15'-9 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-8 3/16
X2 = 2'-0 13/16
X3 = 0'-11
X4 = 0'-2 3/4
L3/4 = 7'-11 1/8(+)

6 x 6

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 16'-3 3/4
SL =
V = 4'-7 5/8
W =
M = 4'-6
T = 0'-11
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 31'-8 9/16
D = 15'-10 11/16
E = 15'-9 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-8 3/16
X2 = 2'-0 13/16
X3 = 0'-11
X4 = 0'-2 3/4
L3/4 = 7'-11 1/8(+)

8 x 6

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 16'-3 3/4
SL =
V = 4'-7 5/8
W =
M = 4'-6
T = 1'-0
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 31'-8 9/16
D = 15'-10 11/16
E = 15'-9 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-8 3/16
X2 = 2'-0 13/16
X3 = 0'-11
X4 = 0'-2 3/4
L3/4 = 7'-11 1/8(+)

10 x 6

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 16'-3 3/4
SL =
V = 4'-7 5/8
W =
M = 4'-6
T = 1'-1
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 31'-8 9/16
D = 15'-10 11/16
E = 15'-9 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-8 3/16
X2 = 2'-0 13/16
X3 = 0'-11
X4 = 0'-2 3/4
L3/4 = 7'-11 1/8(+)

12 x 6

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 16'-3 3/4
SL =
V = 4'-7 5/8
W =
M = 4'-6
T = 1'-2
H = 6'-0

CURVE DATA
C.L. =
L2 =
L3 = 31'-8 9/16
D = 15'-10 11/16
E = 15'-9 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 3'-8 3/16
X2 = 2'-0 13/16
X3 = 0'-11
X4 = 0'-2 3/4
L3/4 = 7'-11 1/8(+)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

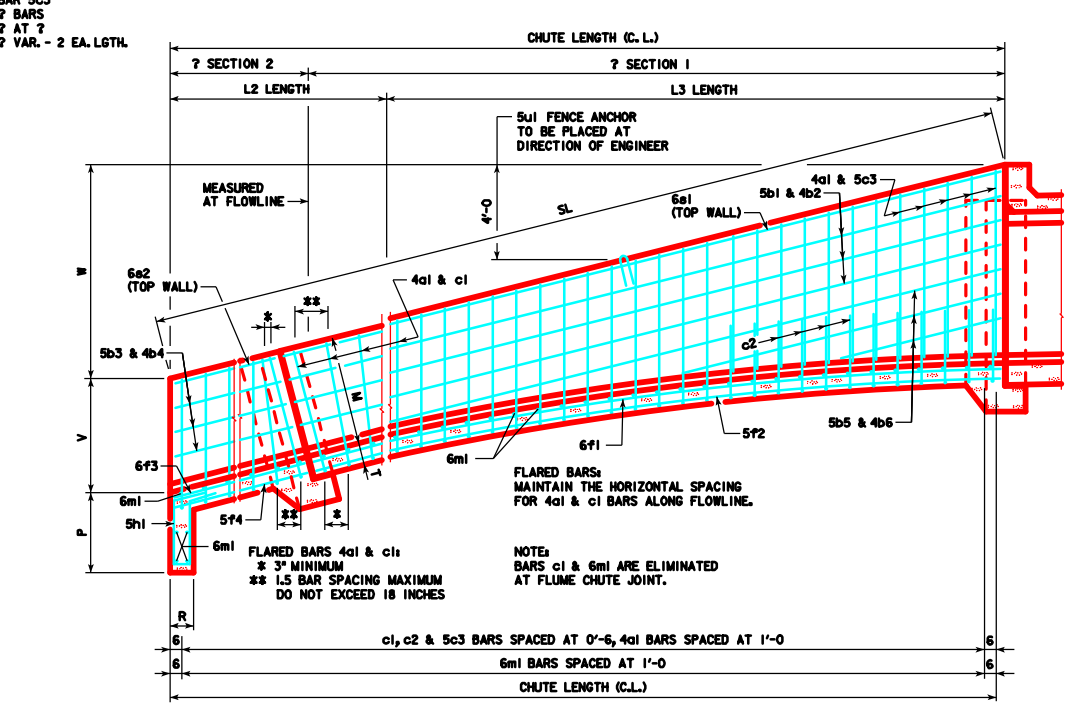

?'x6' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

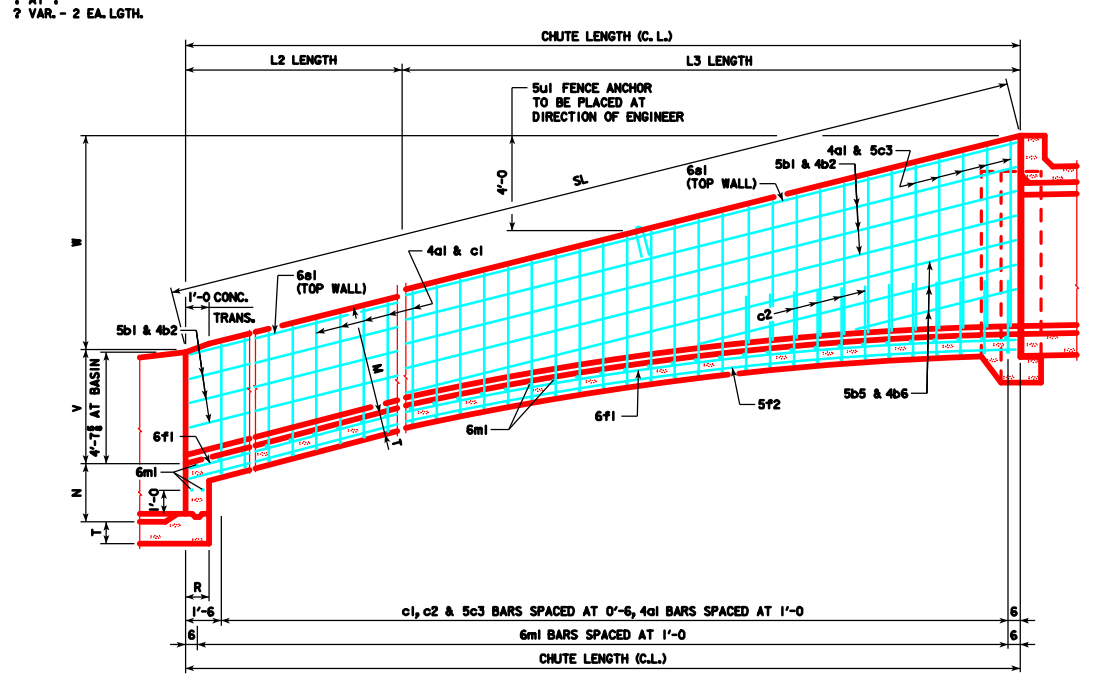

?'x6' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		6		
4b2	WALLS BFH		6		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 2c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

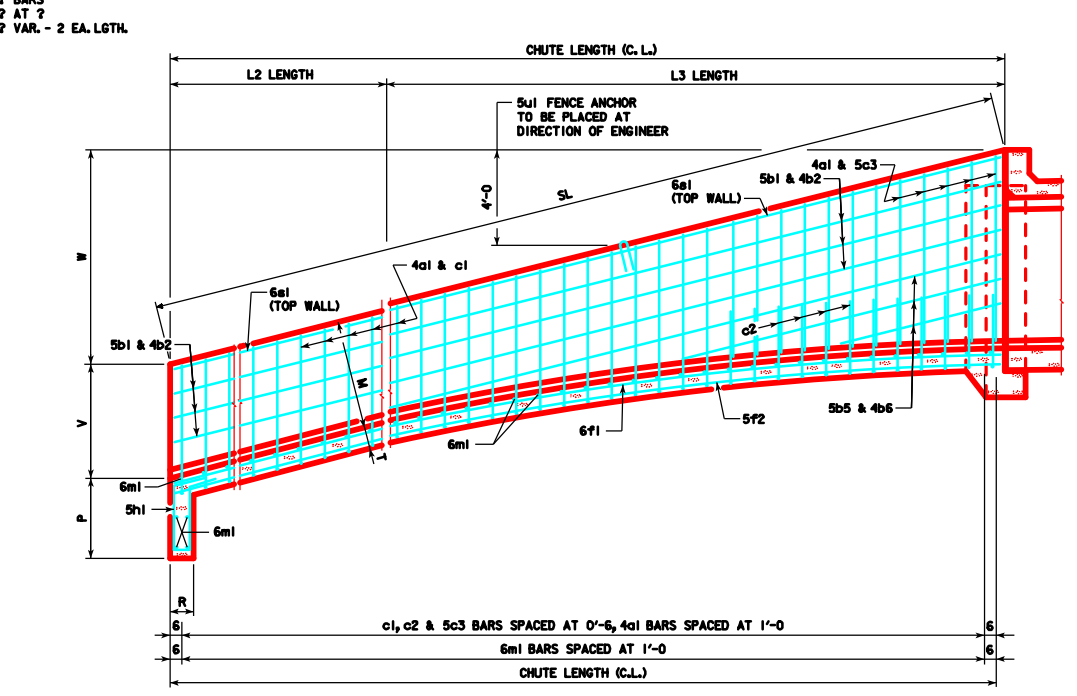

?'x6' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		6		
4b2	WALLS BFH - SECTION 1		6		
5b3	WALLS FFH - SECTION 2		6		
4b4	WALLS BFH - SECTION 2		6		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

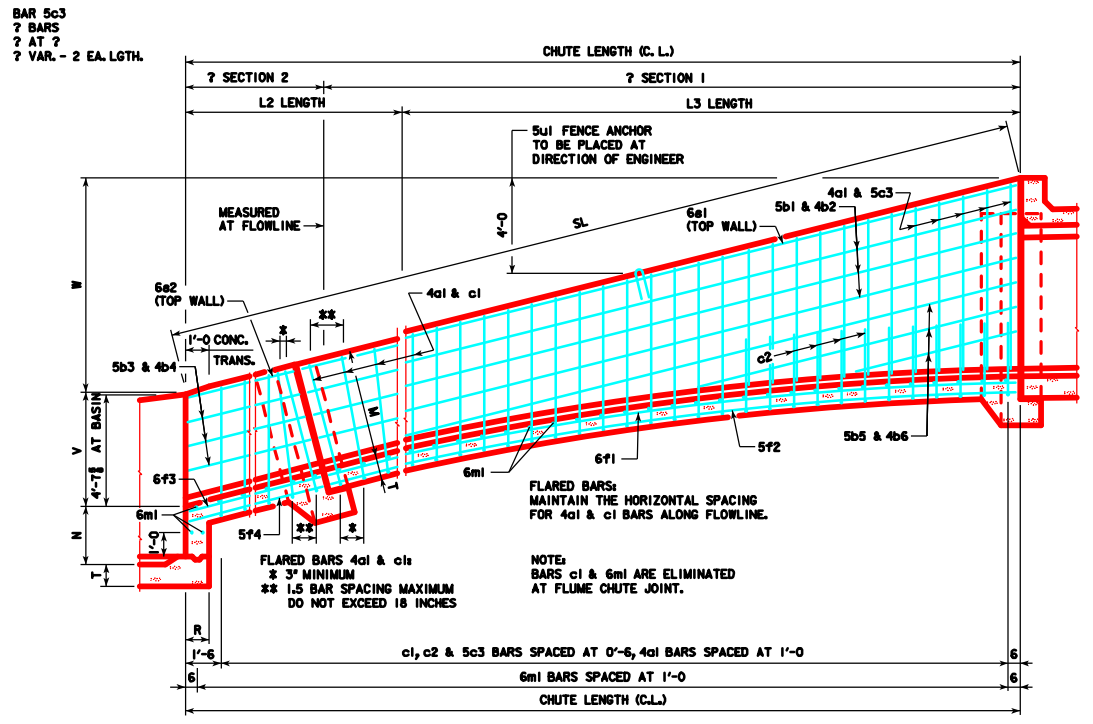

?'x6' FLUME CHUTE - LONGITUDINAL SECTION

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
	REINFORCING BAR LIST - FLUME				
5a1	WALLS FFV	—		LISTED	
5b1	WALLS FFH	—	10		
4b2	WALLS BFH	—	10		
5b5	WALLS FFH	—	6	LISTED	
4b6	WALLS BFH	—	6	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED	⊔			
5c3	WALLS BFV	—		LISTED	
6f1	FLOOR LONGIT. TOP	—			
5f2	FLOOR LONGIT. BOTT.	—			
6m1	FLOOR TRANSV. TOP	—			
6s1	WALLS BOTH F ALONG SLOPE	—	4		
5u1	FENCE ANCHORS (GALVANIZED)	⊃	2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

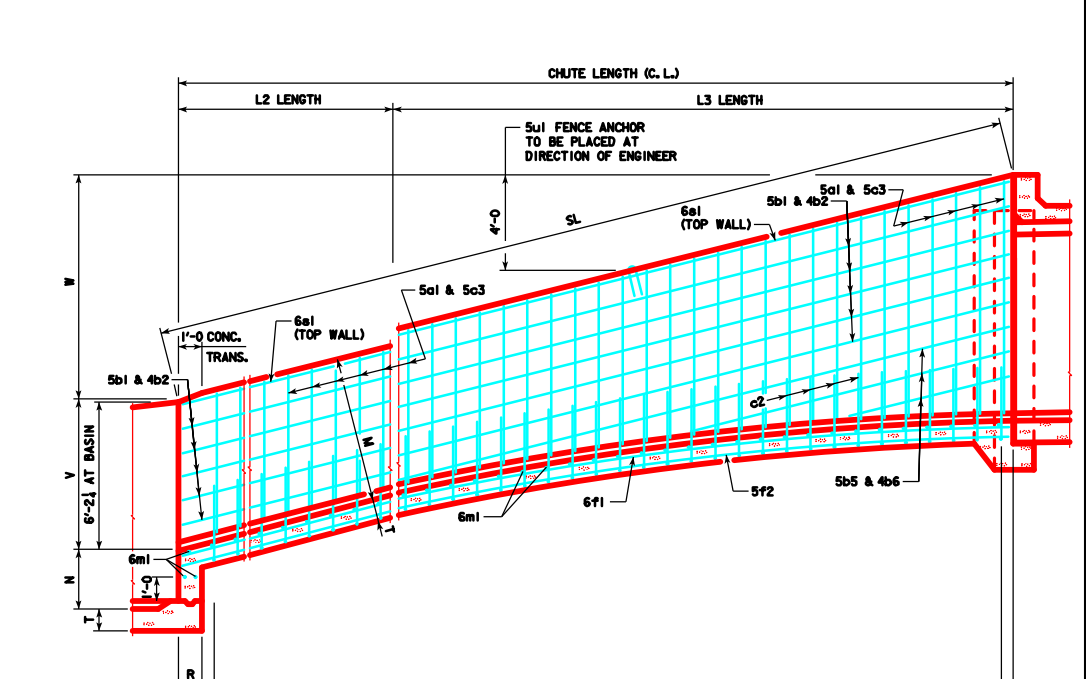

?'x8' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS

BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

FLUME DATA

∡A = 18°26'
∡C = 1°00'
B = 13'-3 3/8
SL =
V = 6'-3 7/8
W =
M = 6'-0
T = 0'-11
H = 8'-0

CURVE DATA

C. L. =
L2 =
L3 = 25'-3 3/4
D = 12'-8 5/8
E = 12'-7 7/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-11 13/16
X2 = 2'-2 1/8
X3 = 0'-11 13/16
X4 = 0'-3
L3/4 = 6'-3 15/16

LOCATION	FOOTING	WALLS	TOTAL
CONCRETE PLACEMENT QUANTITIES			
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
1074SOL - THIS SHEET ISSUED 09-01

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM	FLUME CHUTE DETAILS - 8' HEIGHT	STANDARD SHEET 1074		COUNTY	PROJECT NUMBER	SHEET NUMBER

3:1 SLOPE FLUME

6 x 8

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 13'-3 3/8
SL =
V = 6'-3 7/8
W =
M = 6'-0
T = 0'-11
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 25'-3 3/4
D = 12'-8 5/8
E = 12'-7 7/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-11 13/16
X2 = 2'-2 1/8
X3 = 0'-11 13/16
X4 = 0'-3
L3/4 = 6'-3 15/16

8 x 8

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 13'-3 3/8
SL =
V = 6'-3 7/8
W =
M = 6'-0
T = 1'-0
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 25'-3 3/4
D = 12'-8 5/8
E = 12'-7 7/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-11 13/16
X2 = 2'-2 1/8
X3 = 0'-11 13/16
X4 = 0'-3
L3/4 = 6'-3 15/16

10 x 8

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 13'-3 3/8
SL =
V = 6'-3 7/8
W =
M = 6'-0
T = 1'-1
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 25'-3 3/4
D = 12'-8 5/8
E = 12'-7 7/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-11 13/16
X2 = 2'-2 1/8
X3 = 0'-11 13/16
X4 = 0'-3
L3/4 = 6'-3 15/16

12 x 8

FLUME DATA
∡A = 18°26'
∡C = 1°00'
B = 13'-3 3/8
SL =
V = 6'-3 7/8
W =
M = 6'-0
T = 1'-2
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 25'-3 3/4
D = 12'-8 5/8
E = 12'-7 7/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-11 13/16
X2 = 2'-2 1/8
X3 = 0'-11 13/16
X4 = 0'-3
L3/4 = 6'-3 15/16

4:1 SLOPE FLUME

6 x 8

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 18'-3 3/4
SL =
V = 6'-2 1/4
W =
M = 6'-0
T = 0'-11
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 35'-7 5/8
D = 17'-10 1/16
E = 17'-9 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-1 5/8
X2 = 2'-3 3/4
X3 = 1'-0 3/4
X4 = 0'-3 1/16
L3/4 = 8'-10 15/16(+)

8 x 8

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 18'-3 3/4
SL =
V = 6'-2 1/4
W =
M = 6'-0
T = 1'-0
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 35'-7 5/8
D = 17'-10 1/16
E = 17'-9 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-1 5/8
X2 = 2'-3 3/4
X3 = 1'-0 3/4
X4 = 0'-3 1/16
L3/4 = 8'-10 15/16(+)

10 x 8

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 18'-3 3/4
SL =
V = 6'-2 1/4
W =
M = 6'-0
T = 1'-1
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 35'-7 5/8
D = 17'-10 1/16
E = 17'-9 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-1 5/8
X2 = 2'-3 3/4
X3 = 1'-0 3/4
X4 = 0'-3 1/16
L3/4 = 8'-10 15/16(+)

12 x 8

FLUME DATA
∡A = 14°02'
∡C = 1°00'
B = 18'-3 3/4
SL =
V = 6'-2 1/4
W =
M = 6'-0
T = 1'-2
H = 8'-0

CURVE DATA
C. L. =
L2 =
L3 = 35'-7 5/8
D = 17'-10 1/16
E = 17'-9 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-1 5/8
X2 = 2'-3 3/4
X3 = 1'-0 3/4
X4 = 0'-3 1/16
L3/4 = 8'-10 15/16(+)

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
	REINFORCING BAR LIST - FLUME				
5a1	WALLS FFV	—		LISTED	
5b1	WALLS FFH - SECTION 1	—	10		
4b2	WALLS BFH - SECTION 1	—	10		
5b3	WALLS FFH - SECTION 2	—	10		
4b4	WALLS BFH - SECTION 2	—	10		
5b5	WALLS FFH - SECTION 1	—	6	LISTED	
4b6	WALLS BFH - SECTION 1	—	6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED	⊔		LISTED	
5c3	WALLS BFV	—			
6f1	FLOOR LONGIT. TOP - SECTION 1	—			
5f2	FLOOR LONGIT. BOTT. - SECTION 1	—			
6f3	FLOOR LONGIT. TOP - SECTION 2	—			
5f4	FLOOR LONGIT. BOTT. - SECTION 2	—			
5h1	STUB CURTAIN - SECTION 2	⊓			
6m1	FLOOR TRANSV. TOP	—			
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1	—	4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2	—	4		
5u1	FENCE ANCHORS (GALVANIZED)	⊃	2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

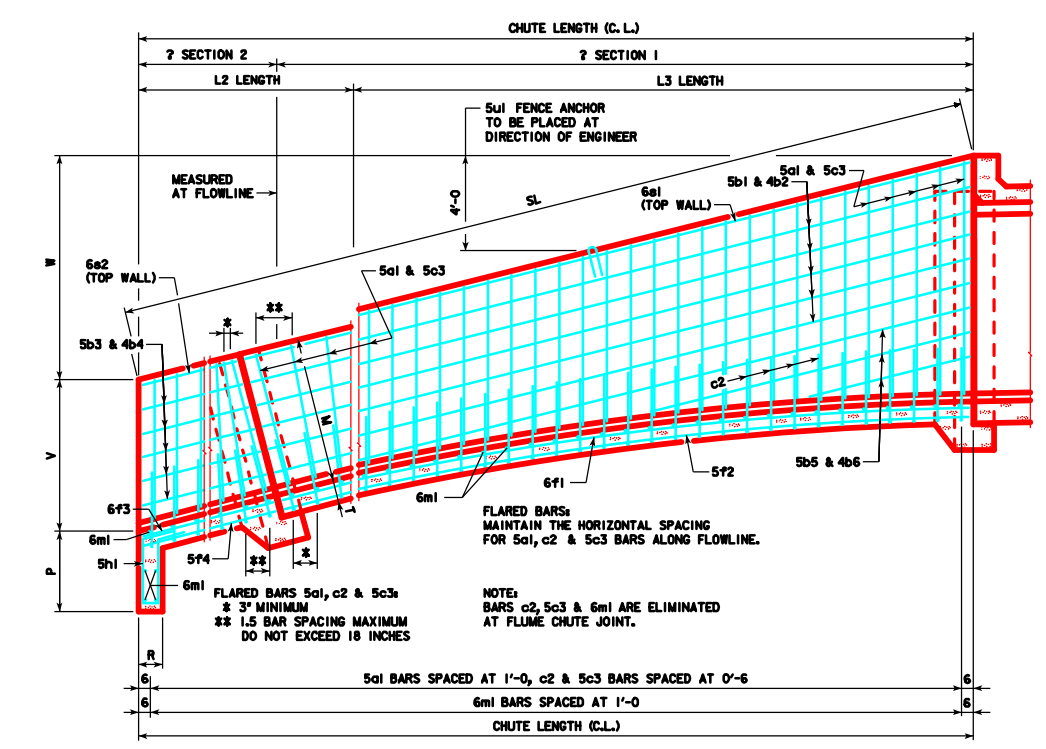

?'x8' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

LOCATION	FOOTING	WALLS	TOTAL
CONCRETE PLACEMENT QUANTITIES			
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
	REINFORCING BAR LIST - FLUME				
5a1	WALLS FFV	—		LISTED	
5b1	WALLS FFH	—	10		
4b2	WALLS BFH	—	10		
5b5	WALLS FFH	—	6	LISTED	
4b6	WALLS BFH	—	6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED	⊔			
5c3	WALLS BFV	—		LISTED	
6f1	FLOOR LONGIT. TOP	—			
5f2	FLOOR LONGIT. BOTT.	—			
6m1	FLOOR TRANSV. TOP	—			
6s1	WALLS BOTH F ALONG SLOPE	—	4		
5u1	FENCE ANCHORS (GALVANIZED)	⊃	2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

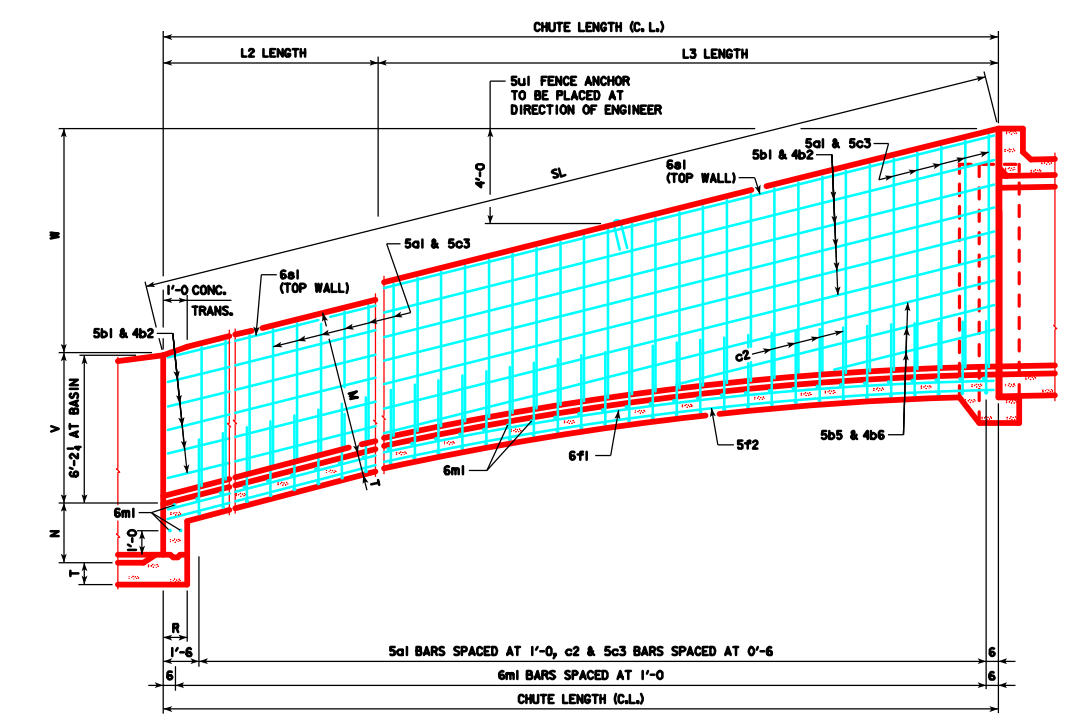

?'x8' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

LOCATION	FOOTING	WALLS	TOTAL
CONCRETE PLACEMENT QUANTITIES			
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
	REINFORCING BAR LIST - FLUME				
5a1	WALLS FFV	—		LISTED	
5b1	WALLS FFH	—	10		
4b2	WALLS BFH	—	10		
5b5	WALLS FFH	—	6	LISTED	
4b6	WALLS BFH	—	6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED	⊔			
5c3	WALLS BFV	—		LISTED	
6f1	FLOOR LONGIT. TOP	—			
5f2	FLOOR LONGIT. BOTT.	—			
5h1	STUB CURTAIN	⊓			
6m1	FLOOR TRANSV. TOP	—			
6s1	WALLS BOTH F ALONG SLOPE	—	4		
5u1	FENCE ANCHORS (GALVANIZED)	⊃	2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

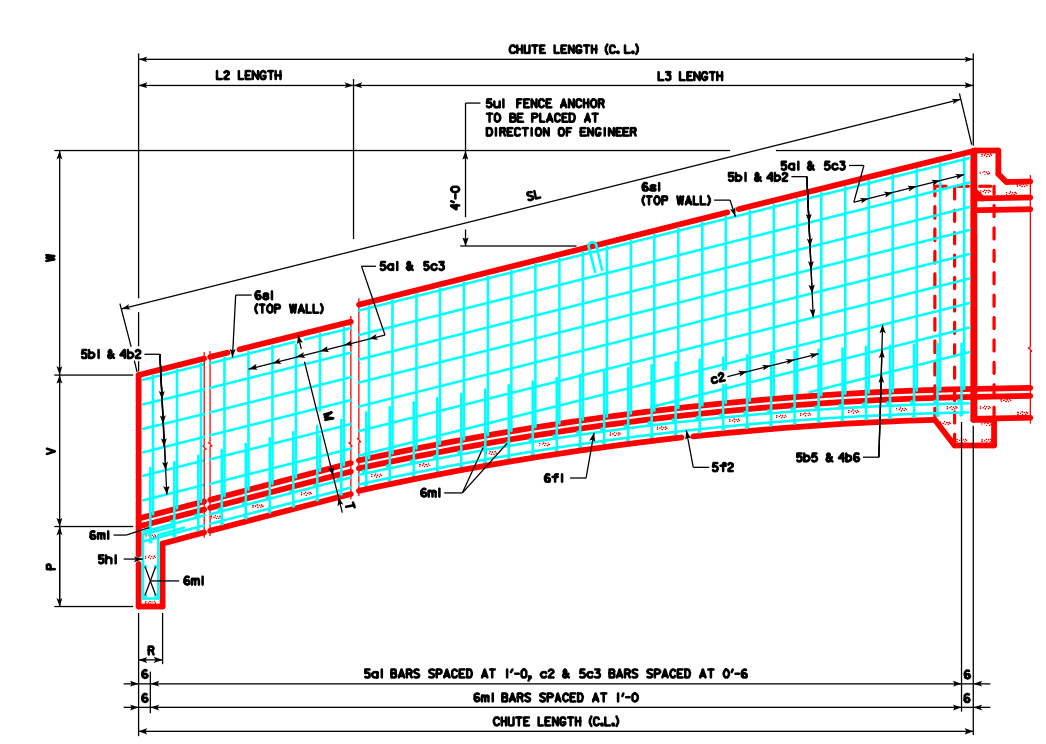

?'x8' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

LOCATION	FOOTING	WALLS	TOTAL
CONCRETE PLACEMENT QUANTITIES			
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
	REINFORCING BAR LIST - FLUME				
5a1	WALLS FFV	—		LISTED	
5b1	WALLS FFH - SECTION 1	—	10		
4b2	WALLS BFH - SECTION 1	—	10		
5b3	WALLS FFH - SECTION 2	—	10		
4b4	WALLS BFH - SECTION 2	—	10		
5b5	WALLS FFH - SECTION 1	—	6	LISTED	
4b6	WALLS BFH - SECTION 1	—	6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED	⊔			
5c3	WALLS BFV	—		LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1	—			
5f2	FLOOR LONGIT. BOTT. - SECTION 1	—			
6f3	FLOOR LONGIT. TOP - SECTION 2	—			
5f4	FLOOR LONGIT. BOTT. - SECTION 2	—			
6m1	FLOOR TRANSV. TOP	—			
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1	—	4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2	—	4		
5u1	FENCE ANCHORS (GALVANIZED)	⊃	2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

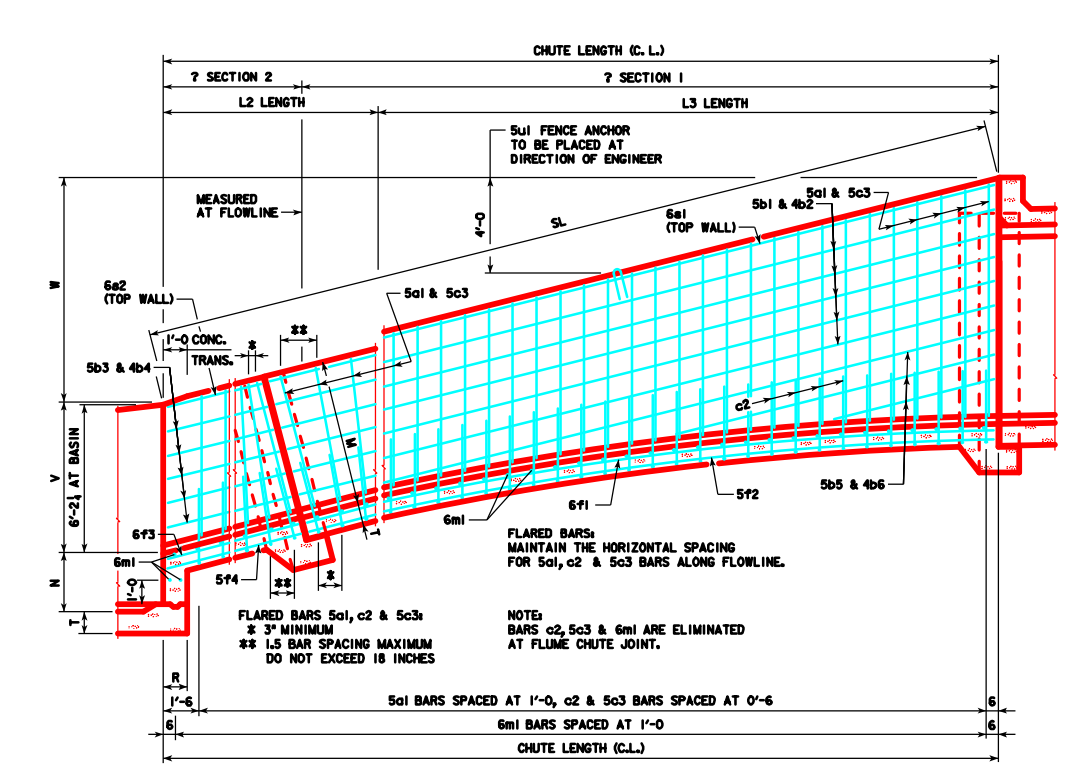

?'x8' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

LOCATION	FOOTING	WALLS	TOTAL
CONCRETE PLACEMENT QUANTITIES			
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
6c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 6c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

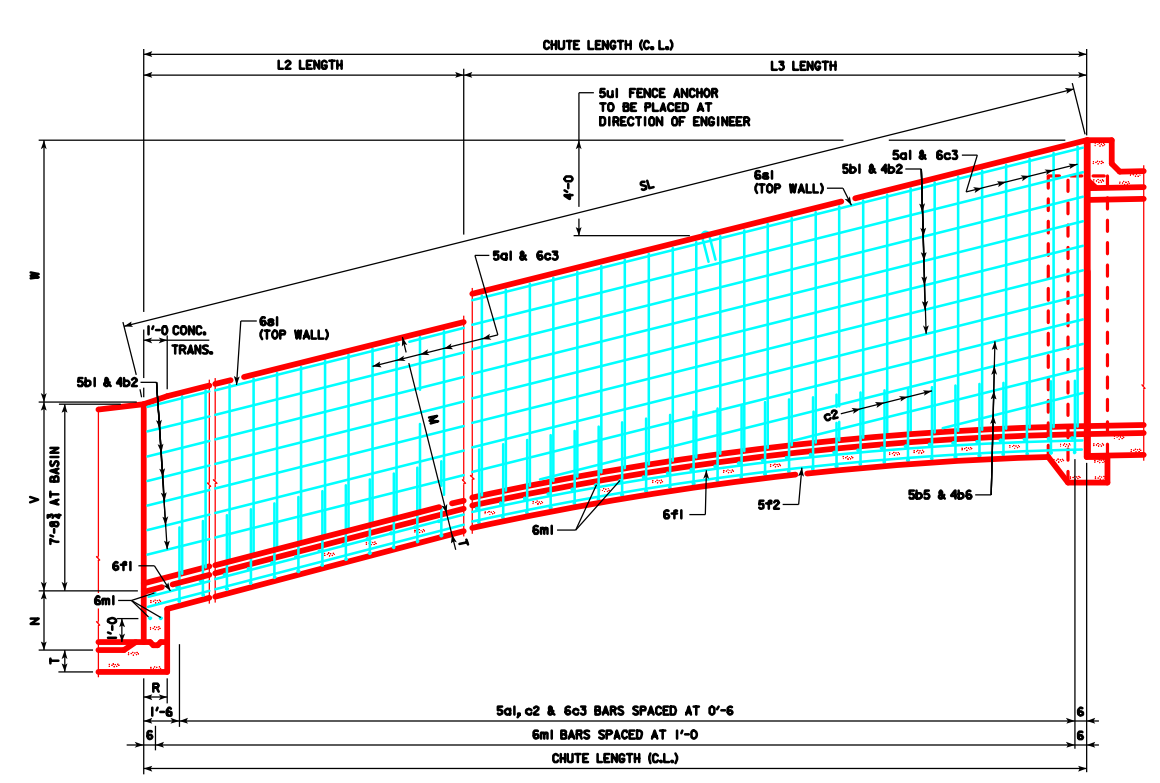

?'x10' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 14'-8 5/8
SL =
V = 7'-10 7/8
W =
M = 7'-6
T = 1'-0
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 27'-11 1/2
D = 14'-0 3/8
E = 13'-11 5/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 13/16
X2 = 2'-5 11/16
X3 = 1'-1 3/16
X4 = 0'-3 5/16
L3/4 = 6'-11 7/8

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM | FLUME CHUTE DETAILS - 10' HEIGHT | STANDARD SHEET 1075 | COUNTY | PROJECT NUMBER | SHEET NUMBER

6/28/2016 1:04:52 PM 6kloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1075 11x17.pdf.pltcfg

3:1 SLOPE FLUME

8 x 10

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 14'-8 5/8
SL =
V = 7'-10 7/8
W =
M = 7'-6
T = 1'-0
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 27'-11 1/2
D = 14'-0 3/8
E = 13'-11 5/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 13/16
X2 = 2'-5 11/16
X3 = 1'-1 3/16
X4 = 0'-3 5/16
L3/4 = 6'-11 7/8

10 x 10

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 14'-8 5/8
SL =
V = 7'-10 7/8
W =
M = 7'-6
T = 1'-1
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 27'-11 1/2
D = 14'-0 3/8
E = 13'-11 5/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 13/16
X2 = 2'-5 11/16
X3 = 1'-1 3/16
X4 = 0'-3 5/16
L3/4 = 6'-11 7/8

12 x 10

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 14'-8 5/8
SL =
V = 7'-10 7/8
W =
M = 7'-6
T = 1'-2
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 27'-11 1/2
D = 14'-0 3/8
E = 13'-11 5/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 13/16
X2 = 2'-5 11/16
X3 = 1'-1 3/16
X4 = 0'-3 5/16
L3/4 = 6'-11 7/8

4:1 SLOPE FLUME

8 x 10

FLUME DATA

∡ A = 14°02'
∡ C = 1°00'
B = 20'-3 13/16
SL =
V = 7'-8 3/4
W =
M = 7'-6
T = 1'-0
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 39'-6 1/16
D = 19'-9 1/2
E = 19'-8 9/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7
X2 = 2'-6 13/16
X3 = 1'-1 3/4
X4 = 0'-3 7/16
L3/4 = 9'-10 1/2(+)

10 x 10

FLUME DATA

∡ A = 14°02'
∡ C = 1°00'
B = 20'-3 13/16
SL =
V = 7'-8 3/4
W =
M = 7'-6
T = 1'-1
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 39'-6 1/16
D = 19'-9 1/2
E = 19'-8 9/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7
X2 = 2'-6 13/16
X3 = 1'-1 3/4
X4 = 0'-3 7/16
L3/4 = 9'-10 1/2(+)

12 x 10

FLUME DATA

∡ A = 14°02'
∡ C = 1°00'
B = 20'-3 13/16
SL =
V = 7'-8 3/4
W =
M = 7'-6
T = 1'-2
H = 10'-0

CURVE DATA

C. L. =
L2 =
L3 = 39'-6 1/16
D = 19'-9 1/2
E = 19'-8 9/16
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7
X2 = 2'-6 13/16
X3 = 1'-1 3/4
X4 = 0'-3 7/16
L3/4 = 9'-10 1/2(+)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		12		
4b2	WALLS BFH - SECTION 1		12		
5b3	WALLS FFH - SECTION 2		12		
4b4	WALLS BFH - SECTION 2		12		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED			LISTED	
6c3	WALLS BFV				
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 6c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

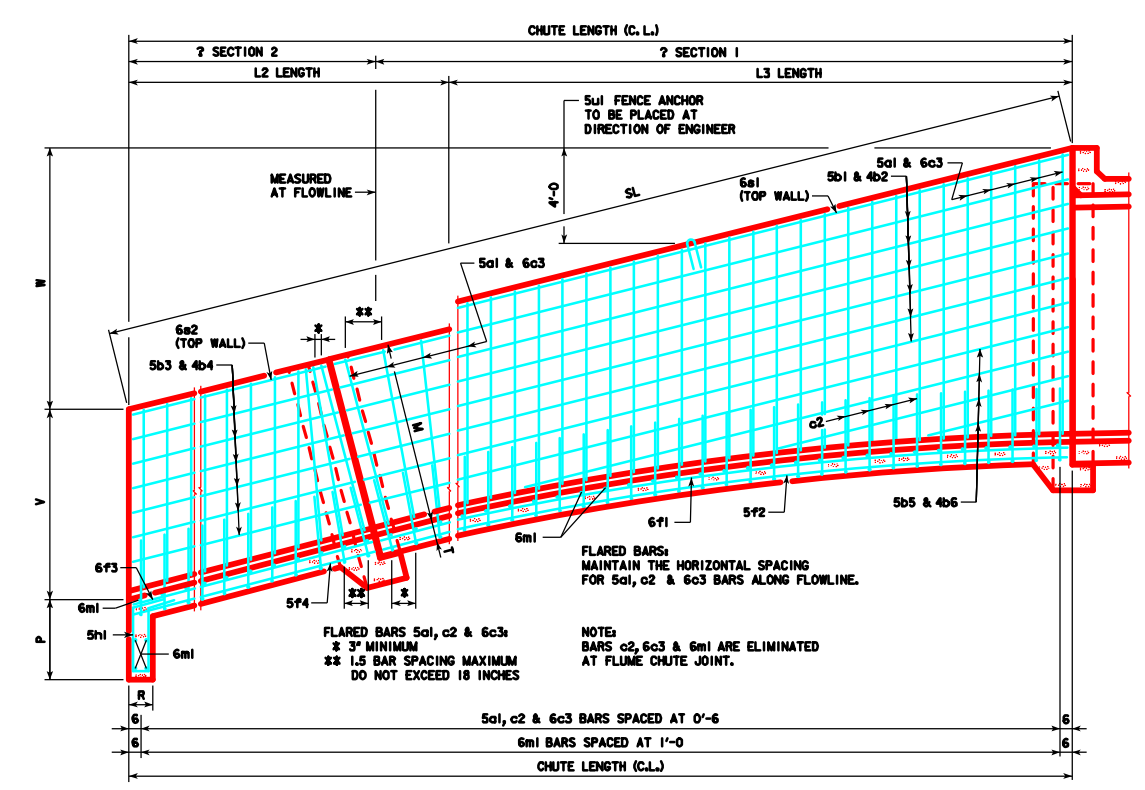

?'x10' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
6c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 6c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

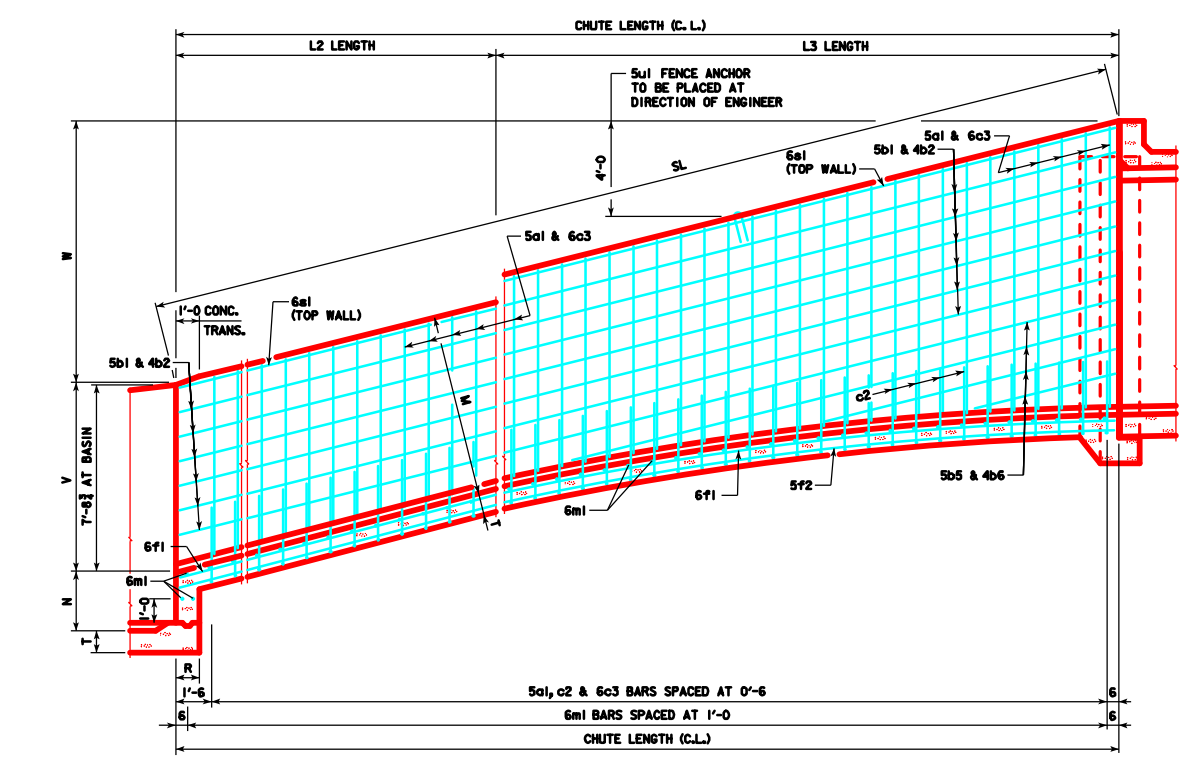

?'x10' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
6c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 6c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

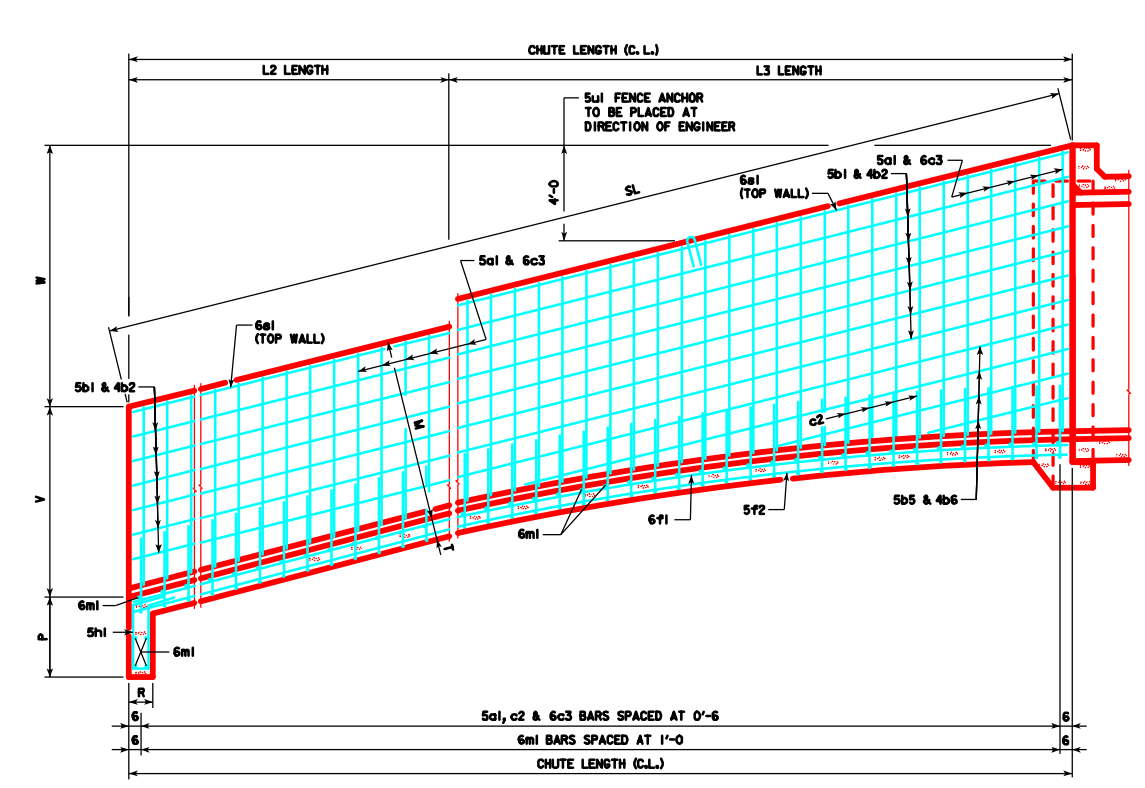

?'x10' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		12		
4b2	WALLS BFH - SECTION 1		12		
5b3	WALLS FFH - SECTION 2		12		
4b4	WALLS BFH - SECTION 2		12		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
6c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 6c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

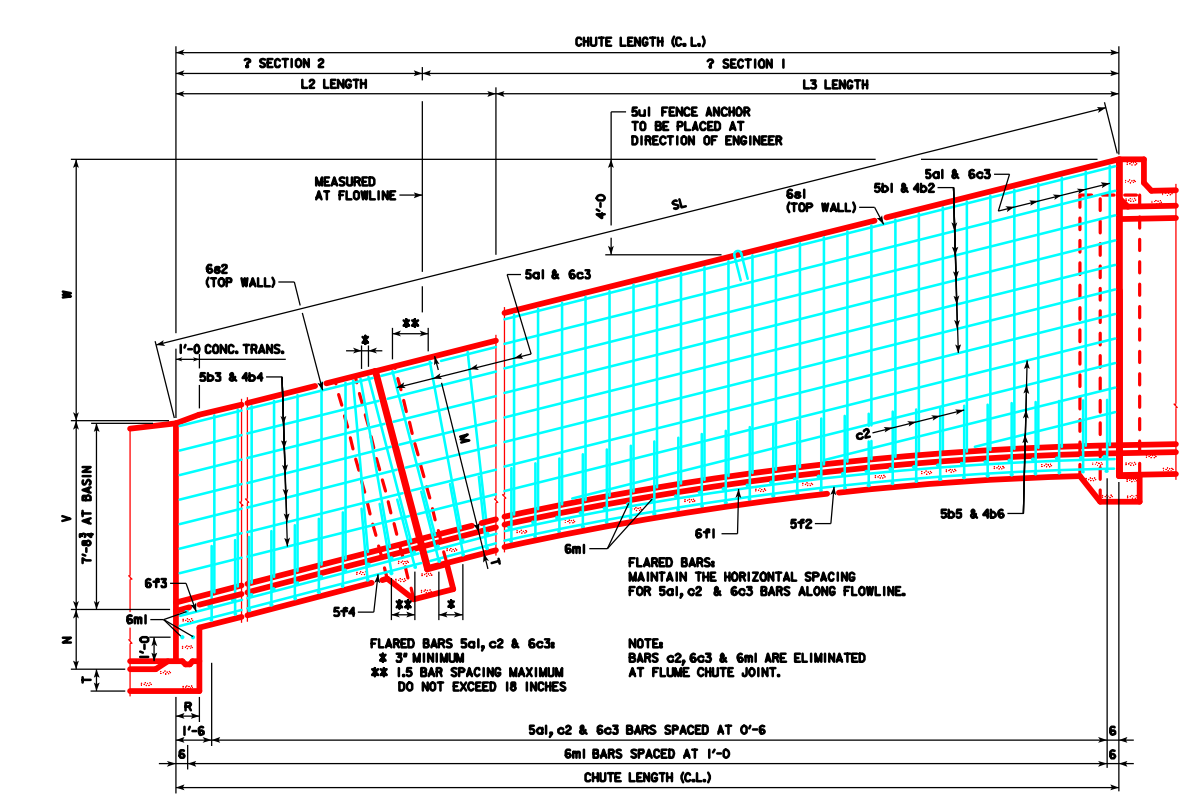

?'x10' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		16		
4b2	WALLS BFH		16		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

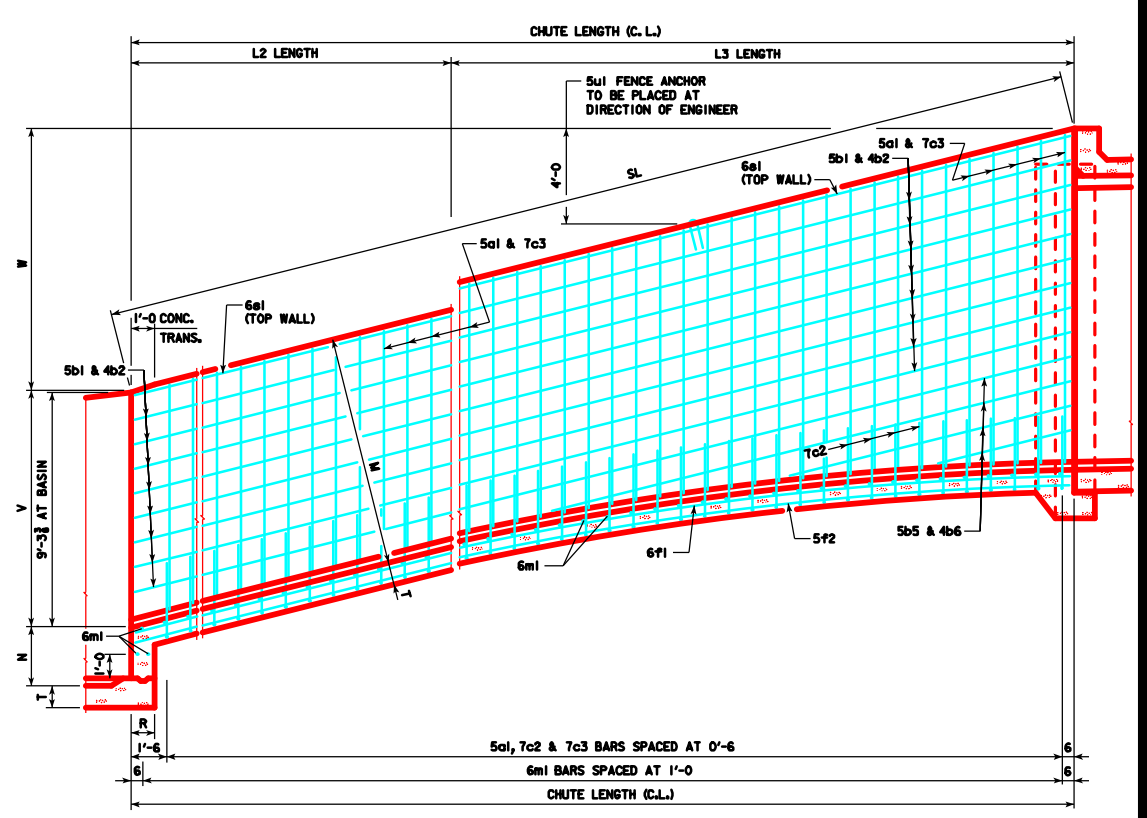

?'x12' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

FLUME DATA

A = 18°26'
C = 1°00'
B = 16'-1
SL =
V = 9'-5 7/8
W =
M = 9'-0
T = 1'-1
H = 12'-0

CURVE DATA

C.L. =
L2 =
L3 = 30'-7 1/4
D = 15'-4 1/8
E = 15'-3 1/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 4'-9 13/16
X2 = 2'-8 1/2
X3 = 1'-2 7/16
X4 = 0'-3 5/8
L3/4 = 7'-7 13/16

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
HE1076.S01 - THIS SHEET ISSUED 09-03

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

DESIGN TEAM	FLUME CHUTE DETAILS - 12' HEIGHT	STANDARD SHEET 1076	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:04:54 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1076 11x17.pdf.pltcfg

3:1 SLOPE FLUME

10 x 12

FLUME DATA

A = 18°26'
C = 1°00'
B = 16'-1
SL =
V = 9'-5 7/8
W =
M = 9'-0
T = 1'-1
H = 12'-0

CURVE DATA

C.L. =
L2 =
L3 = 30'-7 1/4
D = 15'-4 1/8
E = 15'-3 1/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 4'-9 13/16
X2 = 2'-8 1/2
X3 = 1'-2 7/16
X4 = 0'-3 5/8
L3/4 = 7'-7 13/16

12 x 12

FLUME DATA

A = 18°26'
C = 1°00'
B = 16'-1
SL =
V = 9'-5 7/8
W =
M = 9'-0
T = 1'-2
H = 12'-0

CURVE DATA

C.L. =
L2 =
L3 = 30'-7 1/4
D = 15'-4 1/8
E = 15'-3 1/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 4'-9 13/16
X2 = 2'-8 1/2
X3 = 1'-2 7/16
X4 = 0'-3 5/8
L3/4 = 7'-7 13/16

4:1 SLOPE FLUME

10 x 12

FLUME DATA

A = 14°02'
C = 1°00'
B = 22'-3 7/8
SL =
V = 9'-3 3/8
W =
M = 9'-0
T = 1'-1
H = 12'-0

CURVE DATA

C.L. =
L2 =
L3 = 43'-4 13/16
D = 21'-8 13/16
E = 21'-7 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 5'-0 7/16
X2 = 2'-9 13/16
X3 = 1'-3 1/16
X4 = 0'-3 3/4
L3/4 = 10'-10 3/16(+)

12 x 12

FLUME DATA

A = 14°02'
C = 1°00'
B = 22'-3 7/8
SL =
V = 9'-3 3/8
W =
M = 9'-0
T = 1'-2
H = 12'-0

CURVE DATA

C.L. =
L2 =
L3 = 43'-4 13/16
D = 21'-8 13/16
E = 21'-7 7/8
P.C. ELEV. =
P.I. ELEV. =
P.P. ELEV. =
P.T. ELEV. =
X1 = 5'-0 7/16
X2 = 2'-9 13/16
X3 = 1'-3 1/16
X4 = 0'-3 3/4
L3/4 = 10'-10 3/16(+)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		16		
4b2	WALLS BFH - SECTION 1		16		
5b3	WALLS FFH - SECTION 2		16		
4b4	WALLS BFH - SECTION 2		16		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED			LISTED	
7c3	WALLS BFV				
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

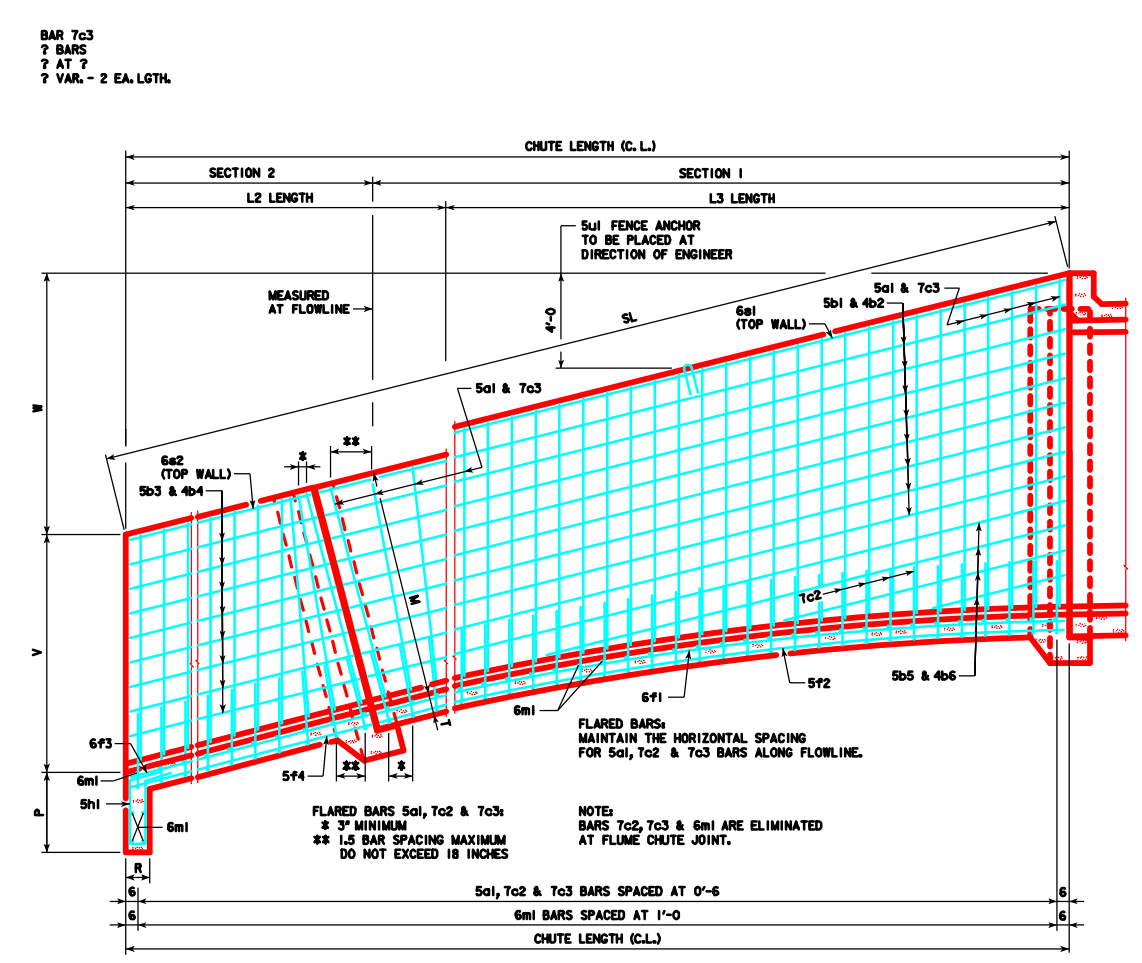

?'x12' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		16		
4b2	WALLS BFH		16		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

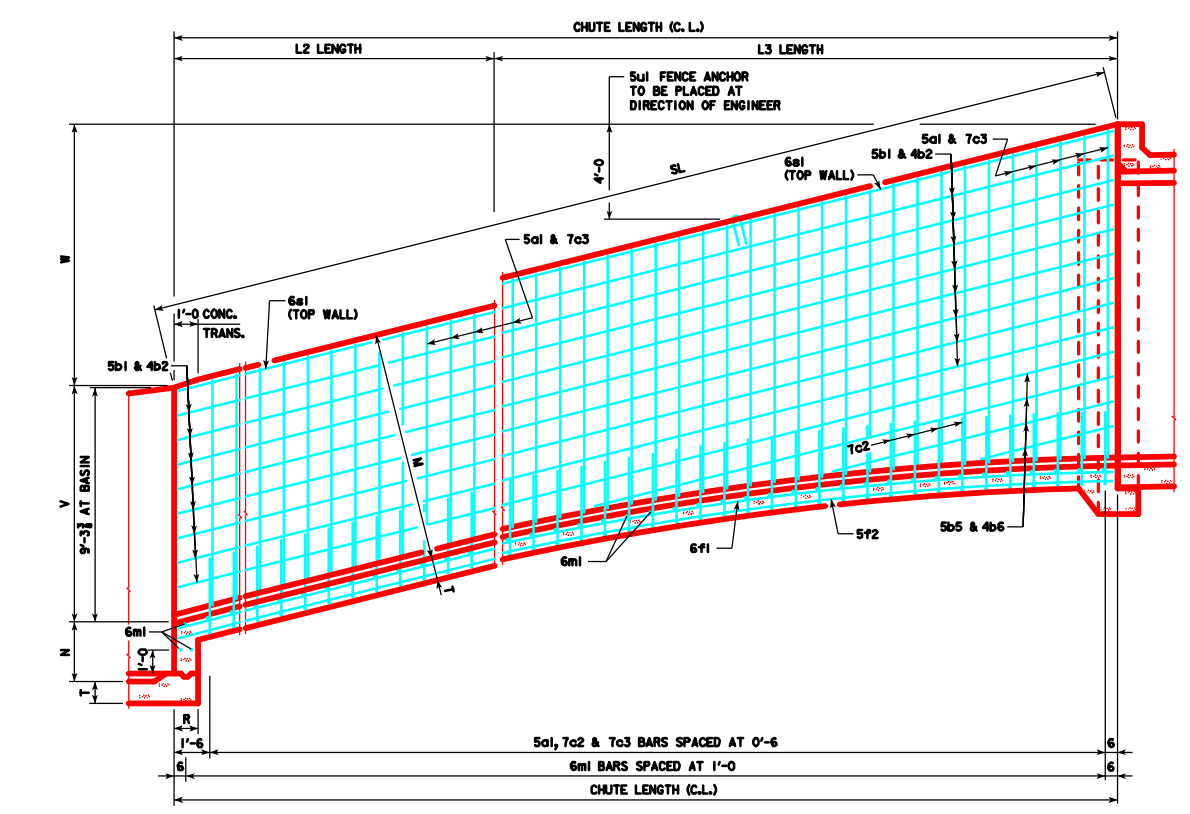

?'x12' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		16		
4b2	WALLS BFH		16		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

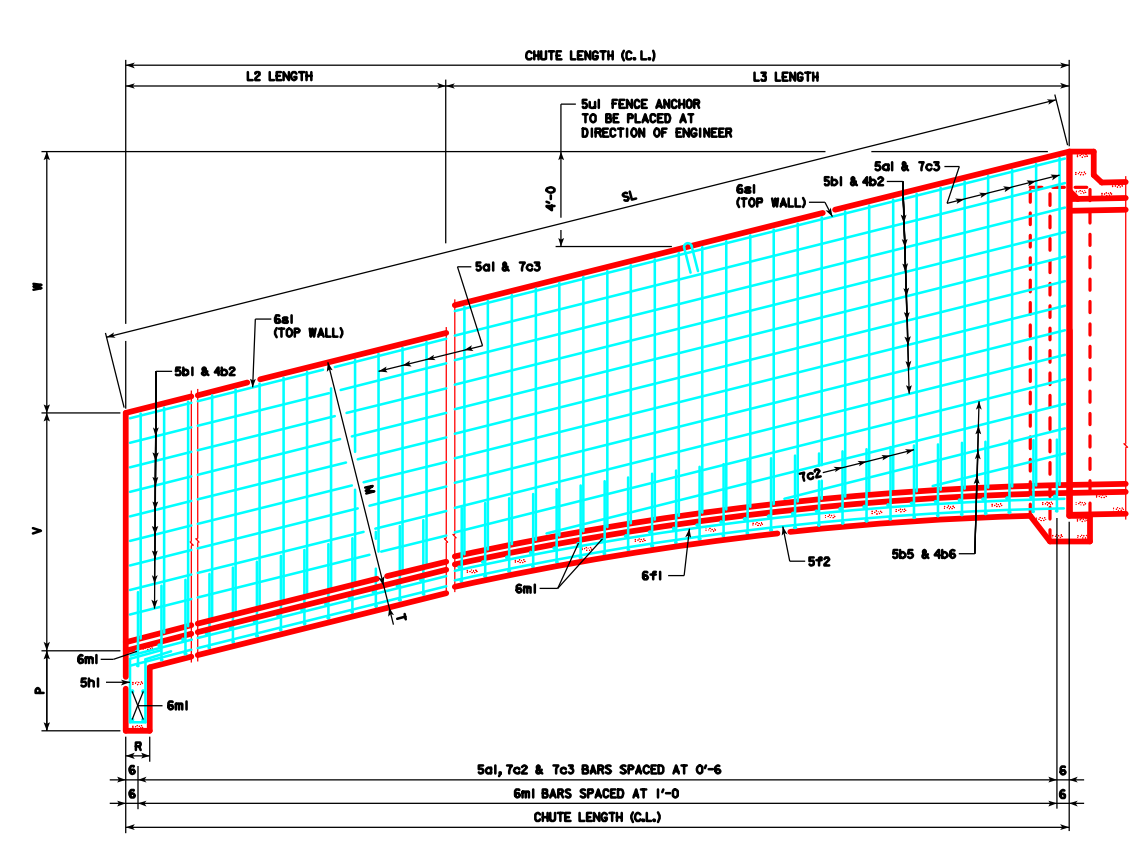

?'x12' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		16		
4b2	WALLS BFH - SECTION 1		16		
5b3	WALLS FFH - SECTION 2		16		
4b4	WALLS BFH - SECTION 2		16		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

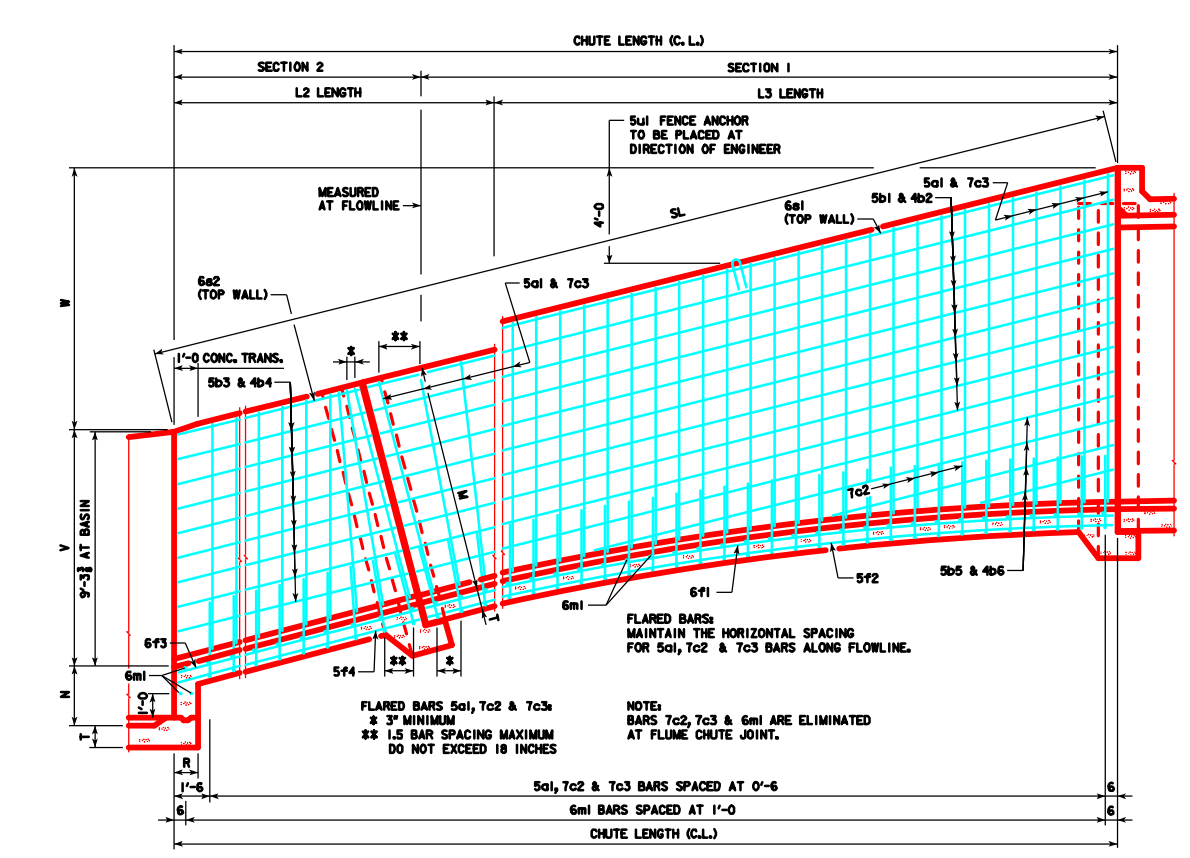

?'x12' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION TO "SL" IN "FLUME DATA" FROM "S" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
ENGLISH\RBDSINGLECULVERTS.DGN - 1077 - THIS SHEET ISSUED 04-12

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		8		
4b2	WALLS BFH		8		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

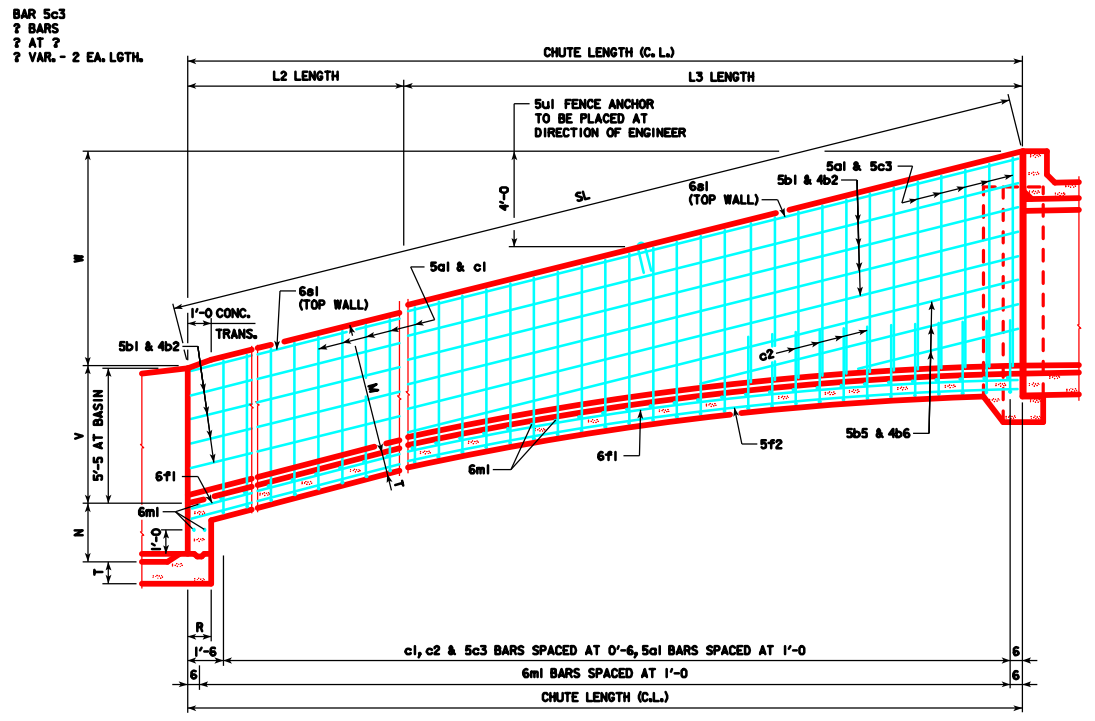

?'x7' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 12'-7 5/16
SL =
V = 5'-6 3/8
W =
M = 5'-3
T = 0'-11
H = 7'-0

CURVE DATA

C. L. =
L2 =
L3 = 23'-11 7/8
D = 12'-0 5/16
E = 11'-11 9/16
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 3'-9 5/16
X2 = 2'-1 1/2
X3 = 0'-11 5/16
X4 = 0'-2 3/16
L3/4 = 5'-11 15/16(+)

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ____ OF ____ FILE NO. ________ DESIGN NO. ________

DESIGN TEAM	FLUME CHUTE DETAILS - 7' HEIGHT	STANDARD SHEET 1077		COUNTY	PROJECT NUMBER	SHEET NUMBER

3:1 SLOPE FLUME

	6 x 7	8 x 7	10 x 7	12 x 7
FLUME DATA				
∡ A =	18°26'	18°26'	18°26'	18°26'
∡ C =	1°00'	1°00'	1°00'	1°00'
B =	12'-7 5/16	12'-7 5/16	12'-7 5/16	12'-7 5/16
SL =				
V =	5'-6 3/8	5'-6 3/8	5'-6 3/8	5'-6 3/8
W =				
M =	5'-3	5'-3	5'-3	5'-3
T =	0'-11	1'-0	1'-1	1'-2
H =	7'-0	7'-0	7'-0	7'-0
CURVE DATA				
C. L. =				
L2 =				
L3 =	23'-11 7/8	23'-11 7/8	23'-11 7/8	23'-11 7/8
D =	12'-0 5/16	12'-0 5/16	12'-0 5/16	12'-0 5/16
E =	11'-11 9/16	11'-11 9/16	11'-11 9/16	11'-11 9/16
P. C. ELEV. =				
P.I. ELEV. =				
P. P. ELEV. =				
P. T. ELEV. =				
X1 =	3'-9 5/16	3'-9 5/16	3'-9 5/16	3'-9 5/16
X2 =	2'-1 1/2	2'-1 1/2	2'-1 1/2	2'-1 1/2
X3 =	0'-11 5/16	0'-11 5/16	0'-11 5/16	0'-11 5/16
X4 =	0'-2 3/16	0'-2 3/16	0'-2 3/16	0'-2 3/16
L3/4 =	5'-11 15/16(+)	5'-11 15/16(+)	5'-11 15/16(+)	5'-11 15/16(+)

4:1 SLOPE FLUME

	6 x 7	8 x 7	10 x 7	12 x 7
FLUME DATA				
∡ A =	14°02'	14°02'	14°02'	14°02'
∡ C =	1°00'	1°00'	1°00'	1°00'
B =	17'-3 3/4	17'-3 3/4	17'-3 3/4	17'-3 3/4
SL =				
V =	5'-5	5'-5	5'-5	5'-5
W =				
M =	5'-3	5'-3	5'-3	5'-3
T =	0'-11	1'-0	1'-1	1'-2
H =	7'-0	7'-0	7'-0	7'-0
CURVE DATA				
C. L. =				
L2 =				
L3 =	33'-7 13/16	33'-7 13/16	33'-7 13/16	33'-7 13/16
D =	16'-10 3/8	16'-10 3/8	16'-10 3/8	16'-10 3/8
E =	16'-9 5/16	16'-9 5/16	16'-9 5/16	16'-9 5/16
P. C. ELEV. =				
P.I. ELEV. =				
P. P. ELEV. =				
P. T. ELEV. =				
X1 =	3'-10 7/8	3'-10 7/8	3'-10 7/8	3'-10 7/8
X2 =	2'-2 5/16	2'-2 5/16	2'-2 5/16	2'-2 5/16
X3 =	0'-11 11/16	0'-11 11/16	0'-11 11/16	0'-11 11/16
X4 =	0'-2 15/16	0'-2 15/16	0'-2 15/16	0'-2 15/16
L3/4 =	8'-5(-)	8'-5(-)	8'-5(-)	8'-5(-)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		8		
4b2	WALLS BFH - SECTION 1		8		
5b3	WALLS FFH - SECTION 2		8		
4b4	WALLS BFH - SECTION 2		8		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

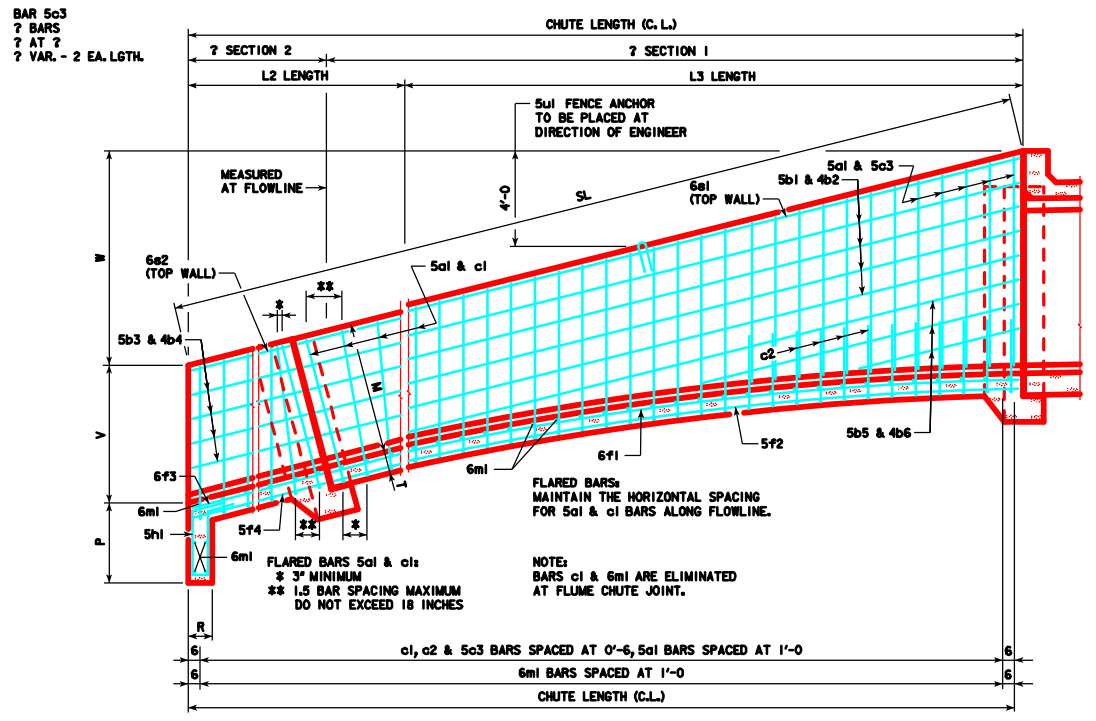

?'x7' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		8		
4b2	WALLS BFH		8		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

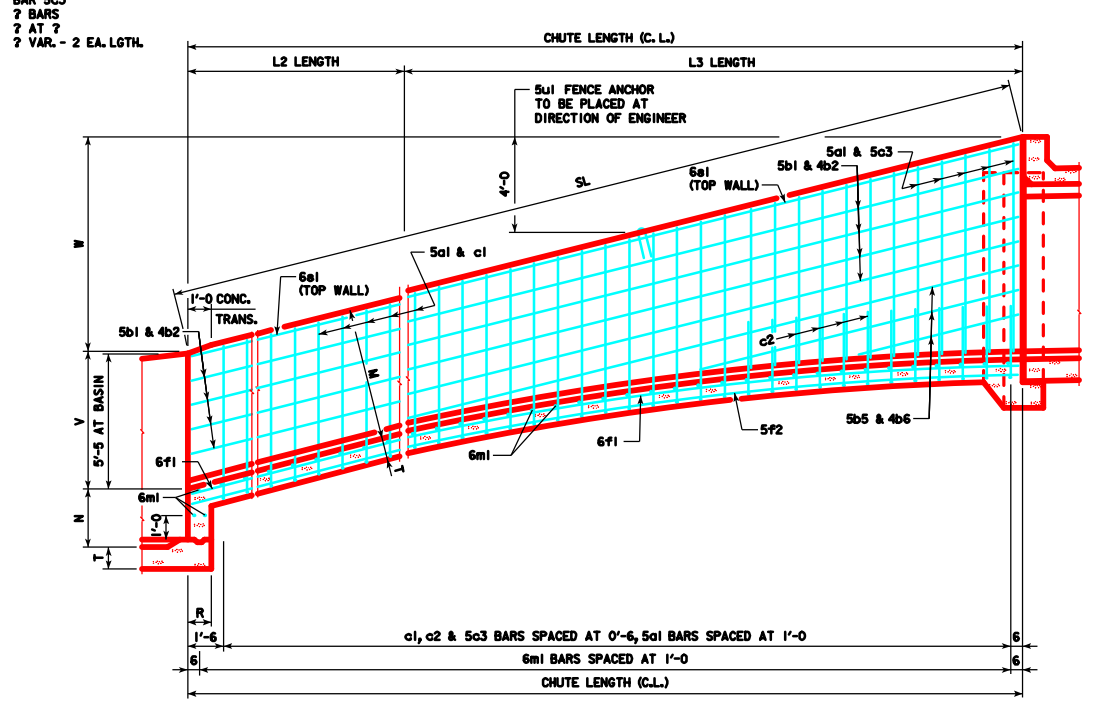

?'x7' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		8		
4b2	WALLS BFH		8		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

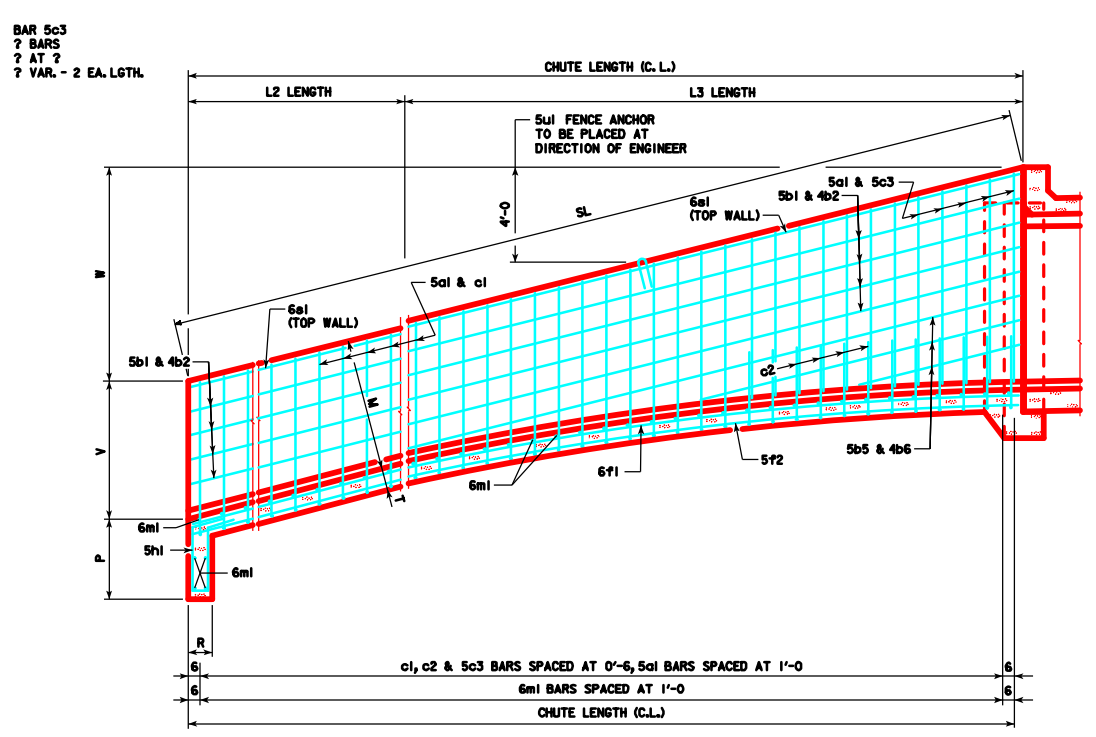

?'x7' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		8		
4b2	WALLS BFH - SECTION 1		8		
5b3	WALLS FFH - SECTION 2		8		
4b4	WALLS BFH - SECTION 2		8		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c1	BOTT. FLOOR & WALLS BFV			LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR ?c1
? BARS
? AT ?
? VAR.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

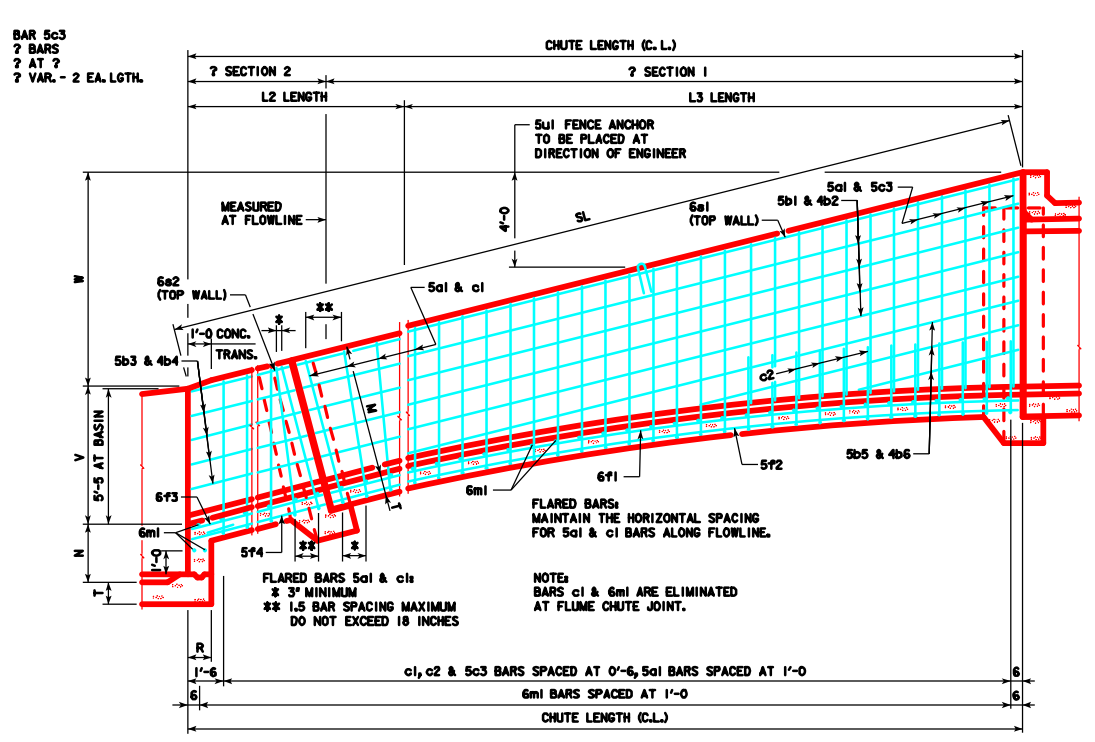

?'x7' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3 3/4
6	4 1/2
7	5 1/4

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION IN "FLUME DATA" FROM "S" TO "SL" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
ENGLISHLRFDSINGLECULVERTS.DGN - 1078 - THIS SHEET ISSUED 04-12

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

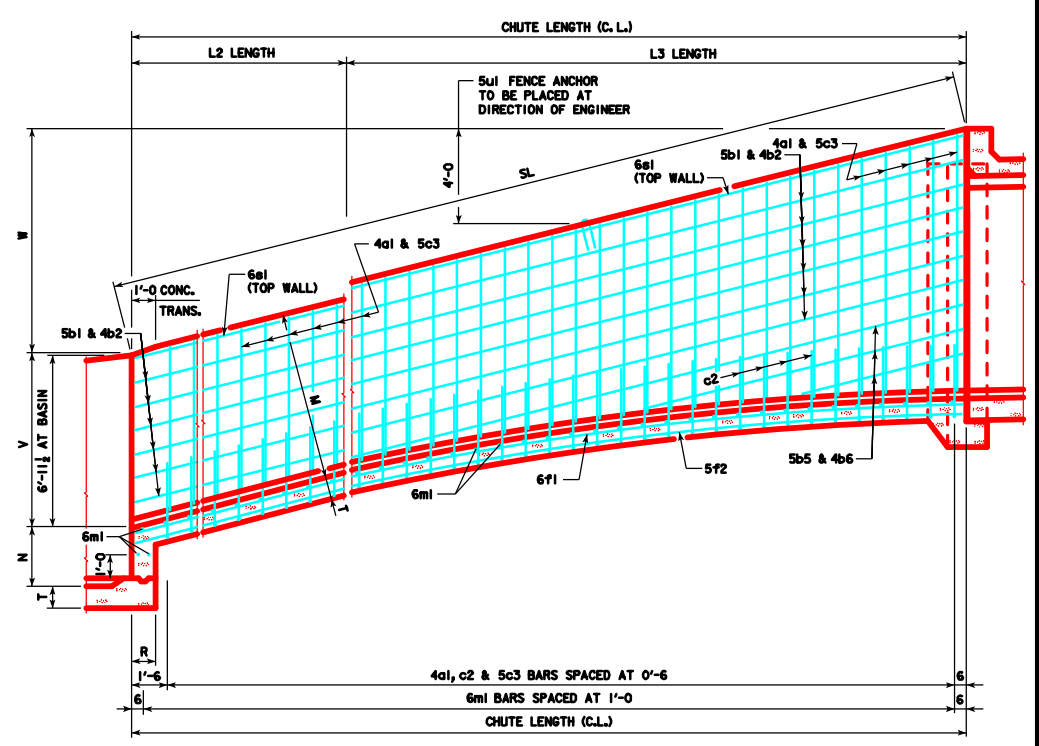

?'x9' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3¾
6	4½
7	5¼

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 14'-0
SL =
V = 7'-1 3/8
W =
M = 6'-9
T = 1'-0
H = 9'-0

CURVE DATA

C. L. =
L2 =
L3 = 26'-7 5/8
D = 13'-4 1/4
E = 13'-3 3/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-2 5/8
X2 = 2'-4 1/4
X3 = 1'-0 5/8
X4 = 0'-3 1/4
L3/4 = 6'-7 7/8(-)

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ______ DESIGN NO. ______

DESIGN TEAM	FLUME CHUTE DETAILS - 9' HEIGHT	STANDARD SHEET 1078	COUNTY	PROJECT NUMBER	SHEET NUMBER

3:1 SLOPE FLUME

8 x 9

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 14'-0
SL =
V = 7'-1 3/8
W =
M = 6'-9
T = 1'-0
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 26'-7 5/8
D = 13'-4 1/4
E = 13'-3 3/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-2 5/8
X2 = 2'-4 1/4
X3 = 1'-0 5/8
X4 = 0'-3 1/4
L3/4 = 6'-7 7/8(-)

10 x 9

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 14'-0
SL =
V = 7'-1 3/8
W =
M = 6'-9
T = 1'-1
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 26'-7 5/8
D = 13'-4 1/4
E = 13'-3 3/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-2 5/8
X2 = 2'-4 1/4
X3 = 1'-0 5/8
X4 = 0'-3 1/4
L3/4 = 6'-7 7/8(-)

12 x 9

FLUME DATA
∡ A = 18°26'
∡ C = 1°00'
B = 14'-0
SL =
V = 7'-1 3/8
W =
M = 6'-9
T = 1'-2
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 26'-7 5/8
D = 13'-4 1/4
E = 13'-3 3/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-2 5/8
X2 = 2'-4 1/4
X3 = 1'-0 5/8
X4 = 0'-3 1/4
L3/4 = 6'-7 7/8(-)

4:1 SLOPE FLUME

8 x 9

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 19'-3 3/8
SL =
V = 6'-11 1/2
W =
M = 6'-9
T = 1'-0
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 37'-6 11/16
D = 18'-9 3/8
E = 18'-8 7/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 5/8
X2 = 2'-5 3/8
X3 = 1'-1 1/8
X4 = 0'-3 1/4
L3/4 = 9'-4 11/16(-)

10 x 9

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 19'-3 3/8
SL =
V = 6'-11 1/2
W =
M = 6'-9
T = 1'-1
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 37'-6 11/16
D = 18'-9 3/8
E = 18'-8 7/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 5/8
X2 = 2'-5 3/8
X3 = 1'-1 1/8
X4 = 0'-3 1/4
L3/4 = 9'-4 11/16(-)

12 x 9

FLUME DATA
∡ A = 14°02'
∡ C = 1°00'
B = 19'-3 3/8
SL =
V = 6'-11 1/2
W =
M = 6'-9
T = 1'-2
H = 9'-0

CURVE DATA
C. L. =
L2 =
L3 = 37'-6 11/16
D = 18'-9 3/8
E = 18'-8 7/8
P. C. ELEV. =
P.I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-4 5/8
X2 = 2'-5 3/8
X3 = 1'-1 1/8
X4 = 0'-3 1/4
L3/4 = 9'-4 11/16(-)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		12		
4b2	WALLS BFH - SECTION 1		12		
5b3	WALLS FFH - SECTION 2		12		
4b4	WALLS BFH - SECTION 2		12		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

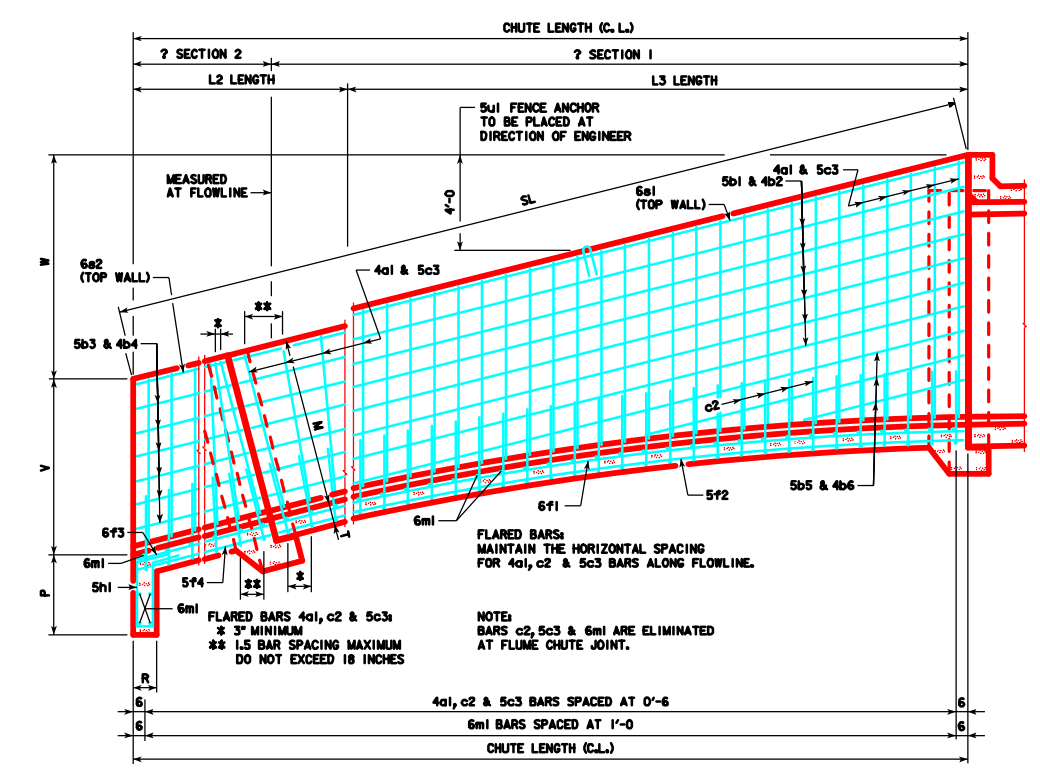

?'x9' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3¾
6	4½
7	5¼

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

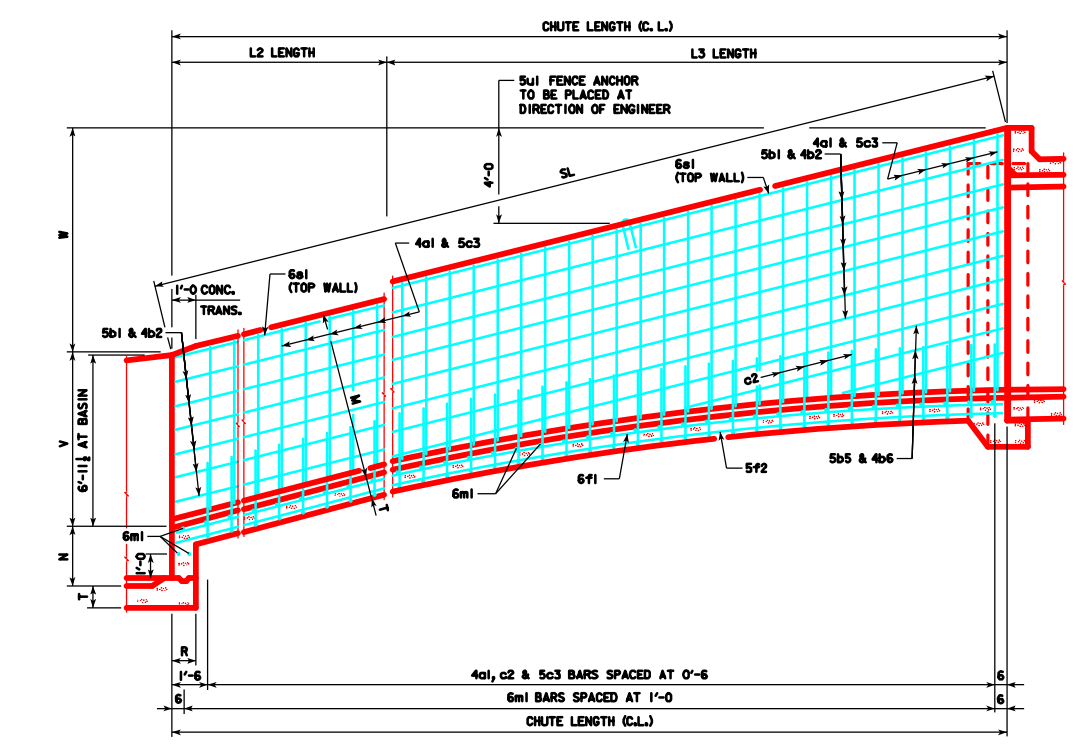

?'x9' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3¾
6	4½
7	5¼

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH		12		
4b2	WALLS BFH		12		
5b5	WALLS FFH		6	LISTED	
4b6	WALLS BFH		6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

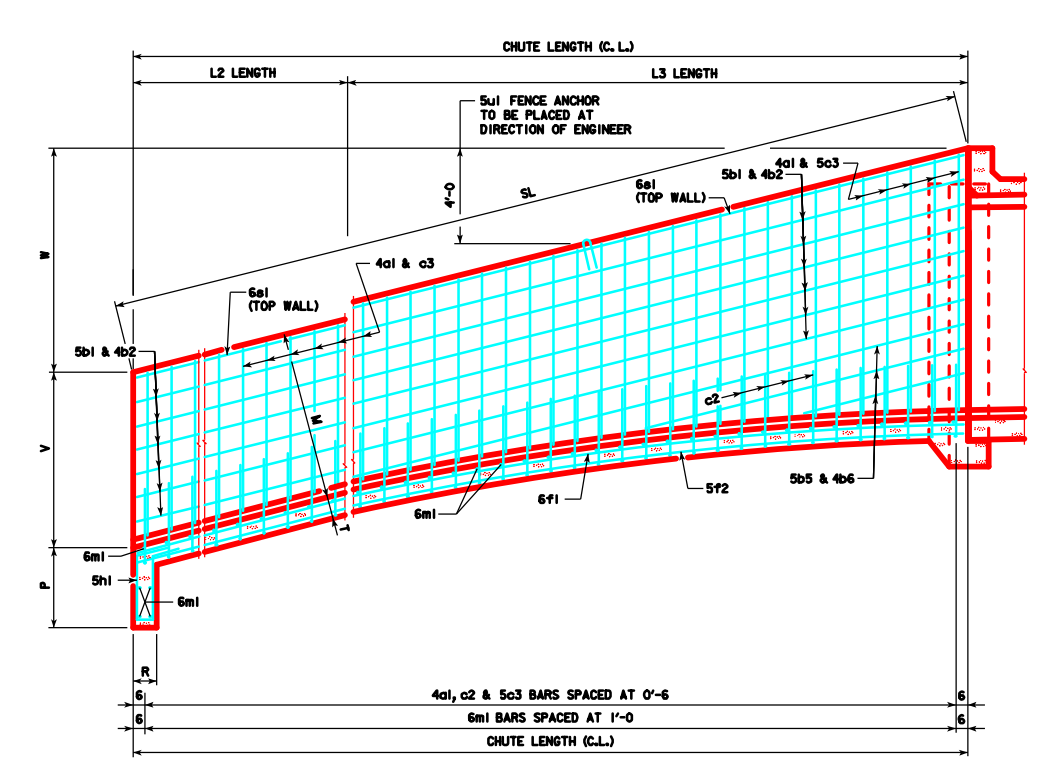

?'x9' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3¾
6	4½
7	5¼

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
4a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		12		
4b2	WALLS BFH - SECTION 1		12		
5b3	WALLS FFH - SECTION 2		12		
4b4	WALLS BFH - SECTION 2		12		
5b5	WALLS FFH - SECTION 1		6	LISTED	
4b6	WALLS BFH - SECTION 1		6	LISTED	
?c2	BOTT. FLOOR & WALLS BFV - SPLICED				
5c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
				TOTAL (LBS.)	

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 4a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
6 BARS - 2 EA. LGTH.

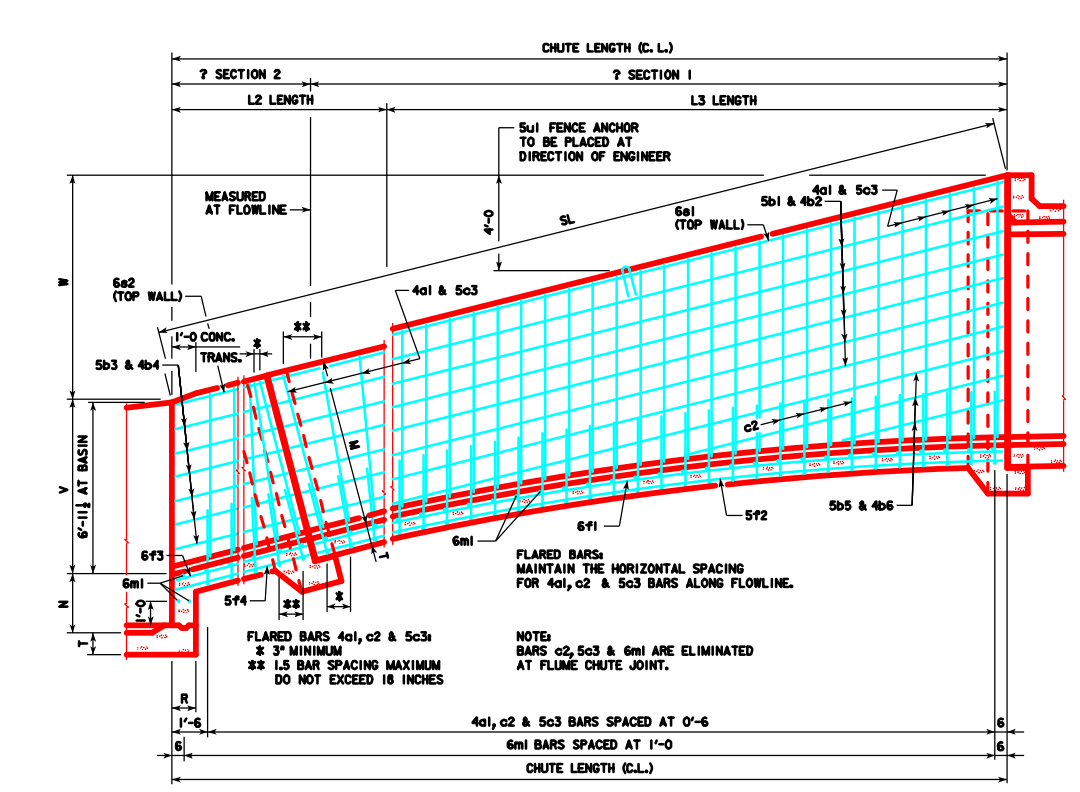

?'x9' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



BAR SIZE	D
5	3¾
6	4½
7	5¼

NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		14		
4b2	WALLS BFH		14		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

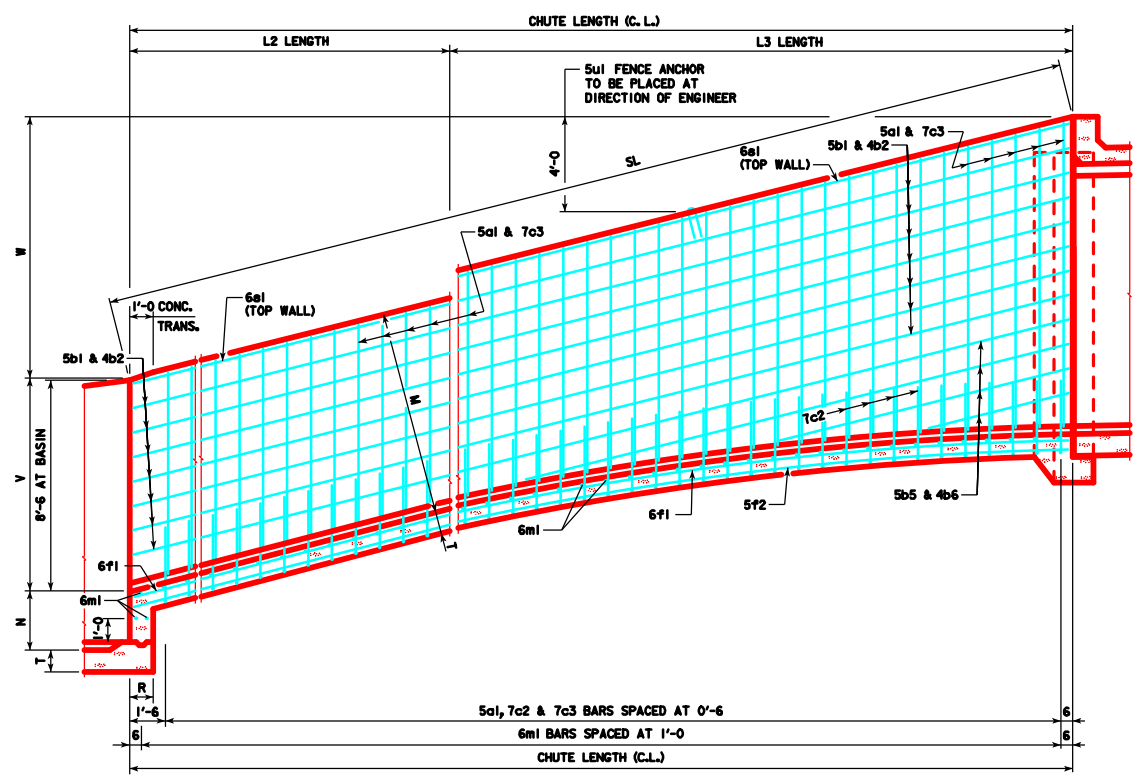

?'x11' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 15'-4 11/16
SL =
V = 8'-8 3/8
W =
M = 8'-3
T = 1'-1
H = 11'-0

CURVE DATA

C. L. =
L2 =
L3 = 29'-3 3/8
D = 14'-8 3/8
E = 14'-7 5/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7 5/8
X2 = 2'-7 1/16
X3 = 1'-1 13/16
X4 = 0'-3 7/16
L3/4 = 7'-3 7/8(-)

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ___ OF ___ FILE NO. ___ DESIGN NO. ___

REVISION 09-13 - ADDED THE REFERENCE TO STANDARD RCF-02-12 IN THE NOTES.
REVISION 04-2016 - CHANGED DESIGNATION "S" IN "FLUME DATA" TO ALLEVIATE CONFUSION WITH THE WORD "SPAN".
ENGLISHLRFDSINGLECULVERTS.DGN - 1079 - THIS SHEET ISSUED 04-12.

DESIGN TEAM	FLUME CHUTE DETAILS - 11' HEIGHT	STANDARD SHEET 1079	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:05:00 PM 6kloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1079 11x17.pdf.pltcfg

3:1 SLOPE FLUME

10 x 11

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 15'-4 11/16
SL =
V = 8'-8 3/8
W =
M = 8'-3
T = 1'-1
H = 11'-0

CURVE DATA

C. L. =
L2 =
L3 = 29'-3 3/8
D = 14'-8 3/8
E = 14'-7 5/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7 5/8
X2 = 2'-7 1/16
X3 = 1'-1 13/16
X4 = 0'-3 7/16
L3/4 = 7'-3 7/8(-)

12 x 11

FLUME DATA

∡ A = 18°26'
∡ C = 1°00'
B = 15'-4 11/16
SL =
V = 8'-8 3/8
W =
M = 8'-3
T = 1'-2
H = 11'-0

CURVE DATA

C. L. =
L2 =
L3 = 29'-3 3/8
D = 14'-8 3/8
E = 14'-7 5/8
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-7 5/8
X2 = 2'-7 1/16
X3 = 1'-1 13/16
X4 = 0'-3 7/16
L3/4 = 7'-3 7/8(-)

4:1 SLOPE FLUME

10 x 11

FLUME DATA

∡ A = 14°02'
∡ C = 1°00'
B = 21'-3 7/8
SL =
V = 8'-6
W =
M = 8'-3
T = 1'-1
H = 11'-0

CURVE DATA

C. L. =
L2 =
L3 = 41'-5 7/8
D = 20'-9 5/16
E = 20'-8 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-9 3/4
X2 = 2'-8 7/16
X3 = 1'-2 3/8
X4 = 0'-3 5/8
L3/4 = 10'-4 3/8(-)

12 x 11

FLUME DATA

∡ A = 14°02'
∡ C = 1°00'
B = 21'-3 7/8
SL =
V = 8'-6
W =
M = 8'-3
T = 1'-2
H = 11'-0

CURVE DATA

C. L. =
L2 =
L3 = 41'-5 7/8
D = 20'-9 5/16
E = 20'-8 1/4
P. C. ELEV. =
P. I. ELEV. =
P. P. ELEV. =
P. T. ELEV. =
X1 = 4'-9 3/4
X2 = 2'-8 7/16
X3 = 1'-2 3/8
X4 = 0'-3 5/8
L3/4 = 10'-4 3/8(-)

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		14		
4b2	WALLS BFH - SECTION 1		14		
5b3	WALLS FFH - SECTION 2		14		
4b4	WALLS BFH - SECTION 2		14		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
5h1	STUB CURTAIN - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

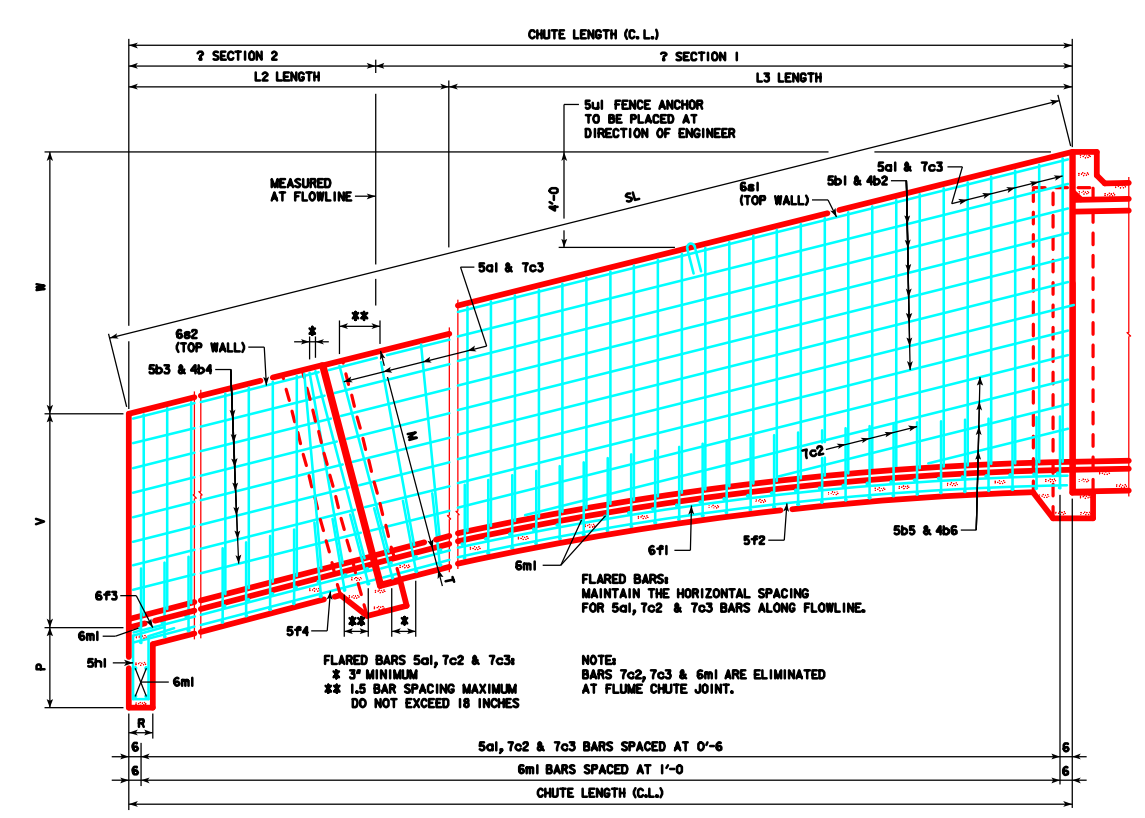

?'x11' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		14		
4b2	WALLS BFH		14		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

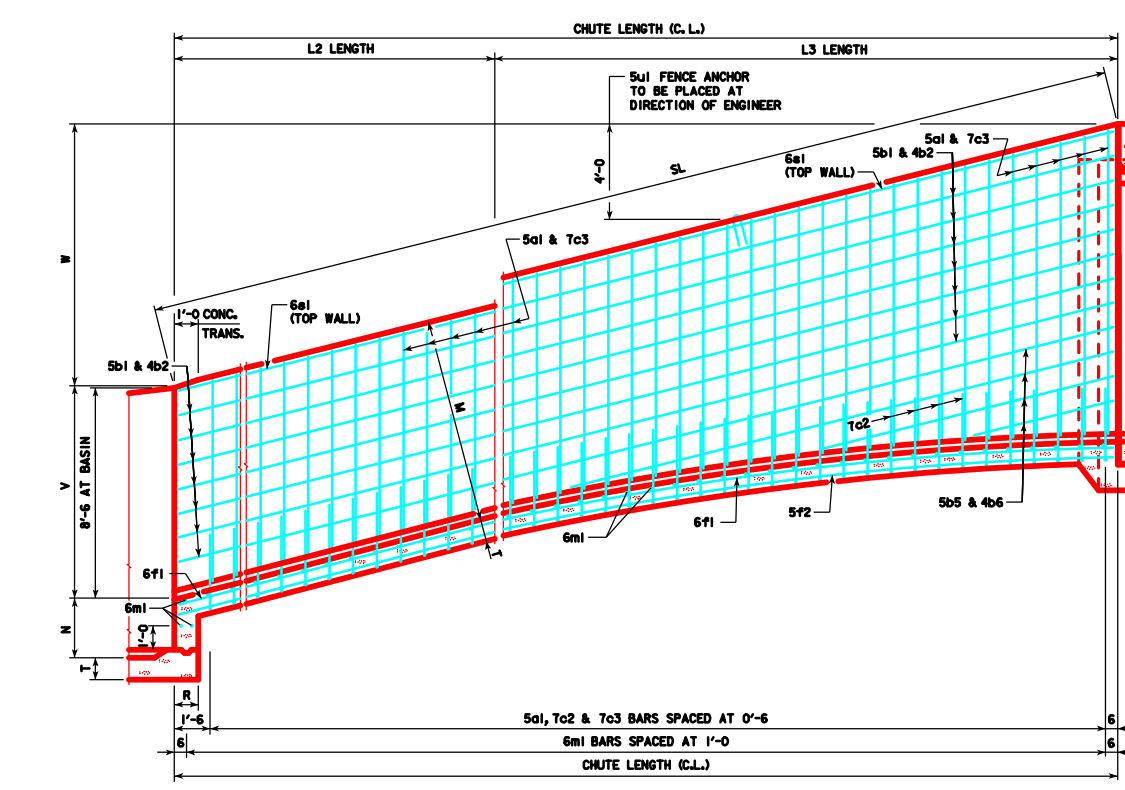

?'x11' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH		14		
4b2	WALLS BFH		14		
5b5	WALLS FFH		8	LISTED	
4b6	WALLS BFH		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP				
5f2	FLOOR LONGIT. BOTT.				
5h1	STUB CURTAIN				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

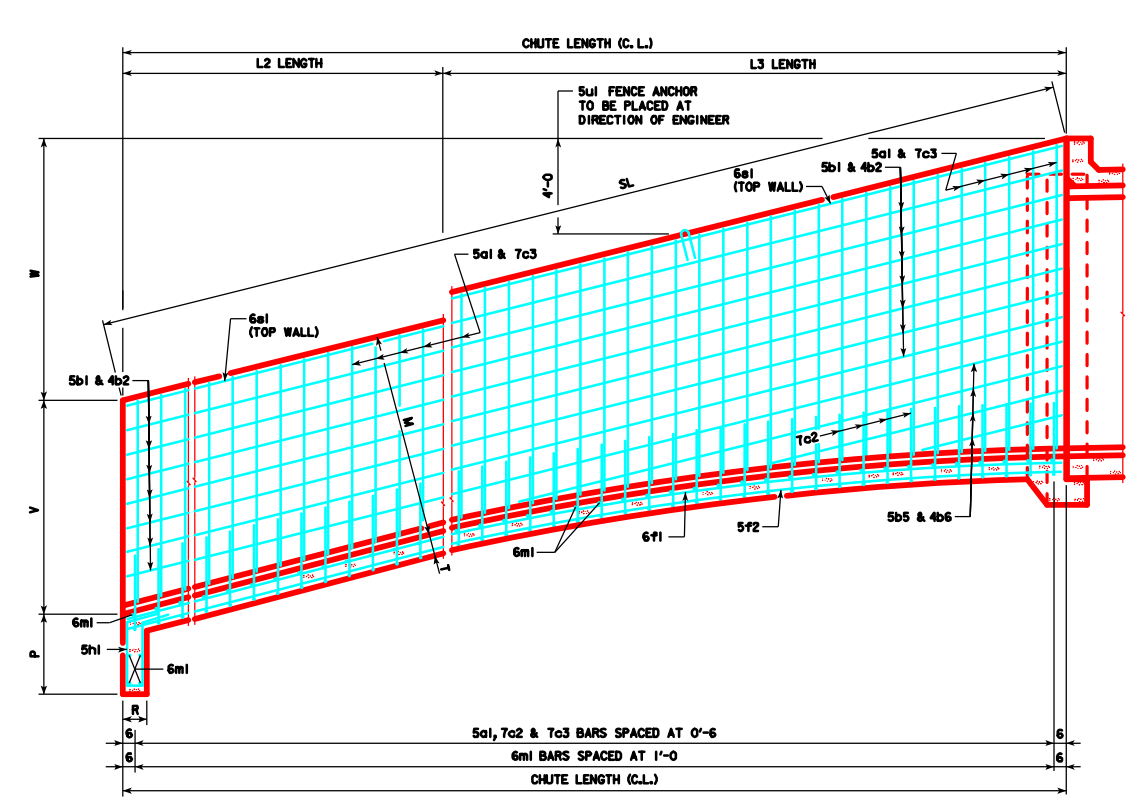

?'x11' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME			
JUNCTION BELL			
STUB CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.

REINFORCING BAR LIST - FLUME

BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT
5a1	WALLS FFV			LISTED	
5b1	WALLS FFH - SECTION 1		14		
4b2	WALLS BFH - SECTION 1		14		
5b3	WALLS FFH - SECTION 2		14		
4b4	WALLS BFH - SECTION 2		14		
5b5	WALLS FFH - SECTION 1		8	LISTED	
4b6	WALLS BFH - SECTION 1		8	LISTED	
7c2	BOTT. FLOOR & WALLS BFV - SPLICED				
7c3	WALLS BFV			LISTED	
6f1	FLOOR LONGIT. TOP - SECTION 1				
5f2	FLOOR LONGIT. BOTT. - SECTION 1				
6f3	FLOOR LONGIT. TOP - SECTION 2				
5f4	FLOOR LONGIT. BOTT. - SECTION 2				
6m1	FLOOR TRANSV. TOP				
6s1	WALLS BOTH F ALONG SLOPE - SECTION 1		4		
6s2	WALLS BOTH F ALONG SLOPE - SECTION 2		4		
5u1	FENCE ANCHORS (GALVANIZED)		2	2'-10	6
	TOTAL (LBS.)				

WEIGHT OF BARS OVER 40'-0 LONG INCLUDES AN ALLOWANCE FOR LAP (2'-8 FOR 6s BARS AND 2'-2 FOR ALL OTHER BARS) BUT LENGTHS SHOWN FOR BARS OVER 40'-0 LONG DO NOT INCLUDE LAPS.

LISTED BARS

BAR 5a1
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 7c3
? BARS
? AT ?
? VAR. - 2 EA. LGTH.

BAR 5b5 AND 4b6
8 BARS - 2 EA. LGTH.

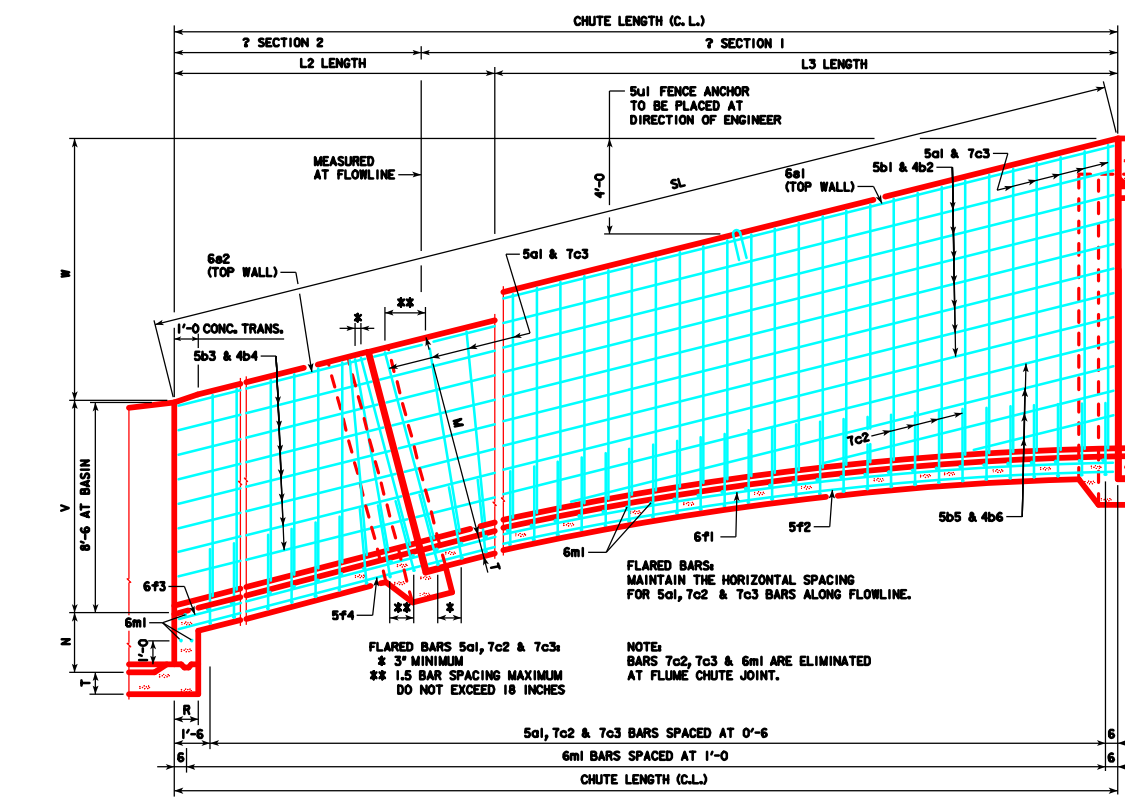

?'x11' FLUME CHUTE - LONGITUDINAL SECTION

BENT BAR DETAILS



NOTE:
ALL DIMENSIONS ARE OUT TO OUT.
D = PIN DIAMETER.

CONCRETE PLACEMENT QUANTITIES

LOCATION	FOOTING	WALLS	TOTAL
FLUME - SECTION 1			
FLUME - SECTION 2			
JUNCTION BELL			
CHUTE BELL			
BASIN			
BASIN CURTAIN		---	
TOTAL (C.Y.)			

NOTES:

1. SEE SHEETS RCF-01-12 & RCF-02-12 FOR FLUME INFORMATION AND DETAILS NOT SHOWN.
2. SEE SHEET FBJ-01-12 FOR BELL JOINT INFORMATION AND DETAILS NOT SHOWN.
3. SEE SHEET RCFB-01-12 FOR FLUME BASIN INFORMATION AND DETAILS NOT SHOWN.

* = SEE CULVERT PLANS FOR LIMITS OF REVETMENT AND ENGINEERING FABRIC.

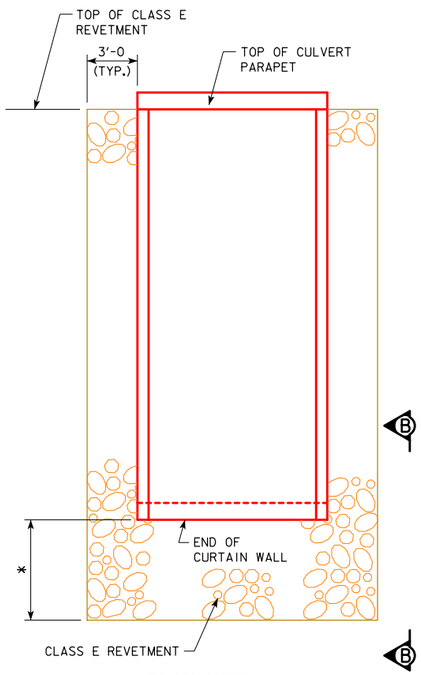

PLAN VIEW

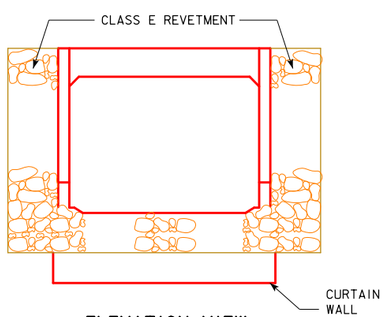

ELEVATION VIEW

0° SKEW HEADWALLS

* = SEE CULVERT PLANS FOR LIMITS OF REVETMENT AND ENGINEERING FABRIC.

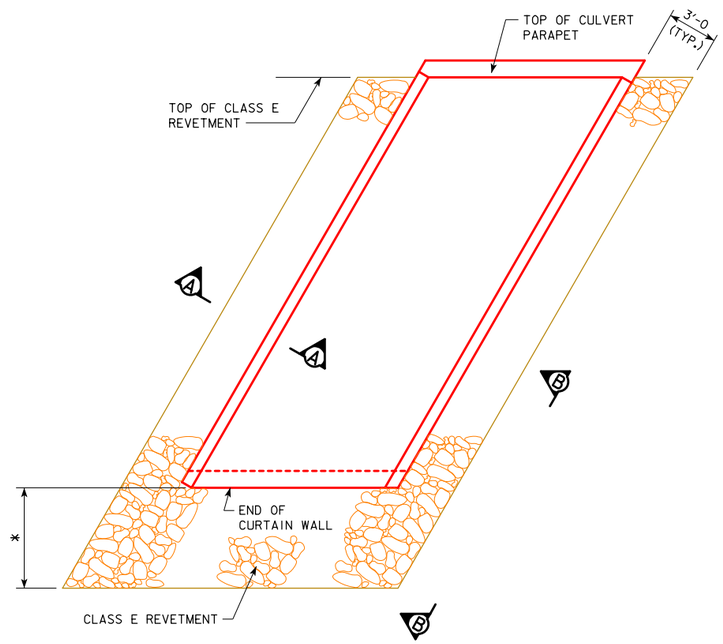

PLAN VIEW

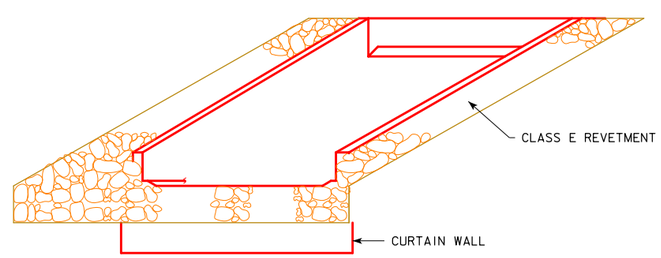

ELEVATION VIEW

____° SKEWED HEADWALL

* = SEE CULVERT PLANS FOR LIMITS OF REVETMENT AND ENGINEERING FABRIC.

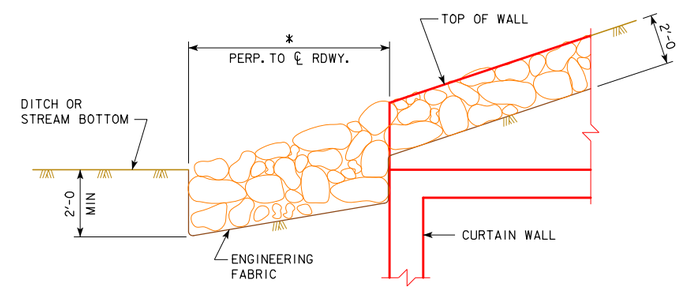

VIEW B-B

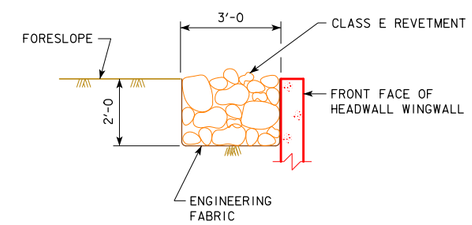

SECTION A-A

TYPICAL DETAILS

CONSTRUCTION NOTES:

CLASS E REVETMENT SHALL BE USED AND PLACED ACCORDING TO ARTICLE 2507.03, OF THE STANDARD SPECIFICATIONS.
THE ENGINEERING FABRIC SHALL MEET THE MATERIAL REQUIREMENTS IN ACCORDANCE WITH ARTICLE 4196.01, B, 3, OF THE STANDARD SPECIFICATIONS.

REVETMENT PROTECTION SHALL BE REQUIRED FOR THE FOLLOWING PARALLEL WING HEADWALL SIZES.

6 x 6 HEADWALL
6 x 7 HEADWALL
6 x 8 HEADWALL
8 x 6 HEADWALL
8 x 7 HEADWALL
8 x 8 HEADWALL
8 x 9 HEADWALL
8 x 10 HEADWALL
10 x 6 HEADWALL
10 x 7 HEADWALL
10 x 8 HEADWALL
10 x 9 HEADWALL
10 x 10 HEADWALL
10 x 11 HEADWALL
10 x 12 HEADWALL
12 x 6 HEADWALL
12 x 7 HEADWALL
12 x 8 HEADWALL
12 x 9 HEADWALL
12 x 10 HEADWALL
12 x 11 HEADWALL
12 x 12 HEADWALL

REVETMENT PROTECTION DETAILS

IOWA DEPARTMENT OF TRANSPORTATION - HIGHWAY DIVISION
DESIGN SHEET NO. ____ OF ____ FILE NO. _____ DESIGN NO. _____

REVISED 1-16 - ADDED NOTE "SEE CULVERT PLANS FOR LIMITS OF REVETMENT AND ENGINEERING FABRIC."
ENGLISHSINGLECULVERTS.DGN - 1092 - THIS SHEET ISSUED 04-12.

DESIGN TEAM	CAST-IN-PLACE CULVERT REVETMENT PROTECTION DETAILS	STANDARD SHEET 1092	COUNTY	PROJECT NUMBER	SHEET NUMBER

6/28/2016 1:05:02 PM bkloss W:\Highway\Bridge\MethodsSection\CADD Concept Drafts\EnglishLRFDSingleCulverts.dgn 1092 11x17_pdf.pltcfg